

Comenda's heavy duty AC2 compact rack conveyor dishwashers are compact while offering reliability, durability and delivering the best in technological evolution.

AC2 dishwashers have an output of 100 racks per hour up to 150 racks per hour using the P5 Prewash zone. Deep drawn tank, self-draining pump and raised feet guarantee maximum hygiene while the support structure, durable mechanics and construction details provide high quality safety features.

STANDARD FEATURES

- Electro mechanical control panel at the top of machine
- Self draining vertical wash pump
- Door wipe seal for constant cleaning inside
- Stainless steel filters, rinse column and tank fill spout
- Deep drawn wash tank with rounded corners
- Durable stainless steel wash and self supporting stainless rinse arms
- Insulated double walled door with integral balancing springs
- EOR - Emergency Override (key activated to bypass circuit board)
- 3 x peg racks, 1 x latware rack, 1 x cutlery container
- Autotimer - reduces consumption by stopping pumps when there are no racks entering the dishwasher, restarts automatically when racks are loaded
- Automatic Proportional Rinse System (APRS)

OPTIONS

- Entry and Exit splash shields with collar
- Dryer
- Heat Recovery
- Heat Pump
- Drain pumps
- Pre Wash Zone 500mm
- Proportional Rinse System (PRS)
- Rinse Aid Homogeniser (RAH)
- DHM Pre-scrapping system
- Midwash Plus (MWP)

**INDUSTRY
KITCHENS**



www.industrykitchens.com.au 1800 611 058

AC2-HDRL

**HD LINE HEAVY DUTY
COMPACT RACK CONVEYOR DISHWASHER**



Connections:
a: tanks drain
b: water inlet
c: electrical connection

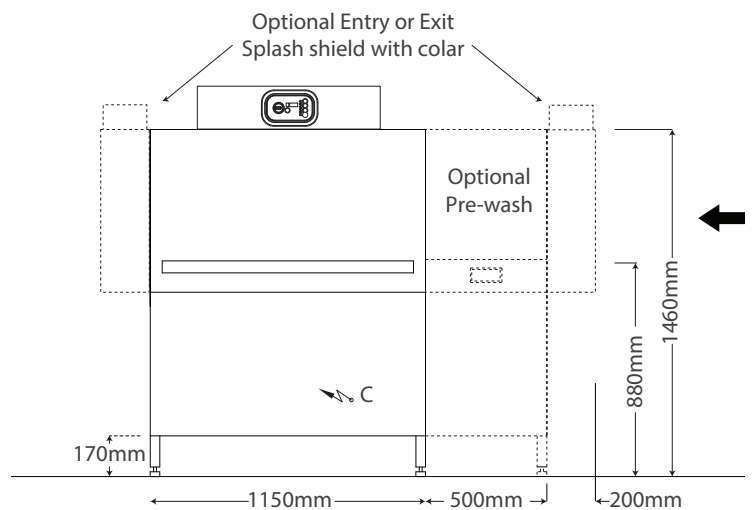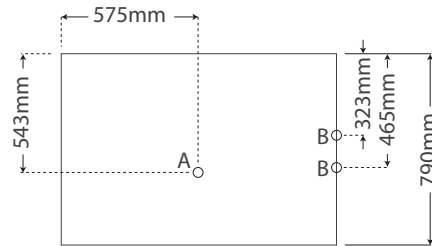

DIMENSIONS

Dishwasher: 1150W x 795D x 1660H mm

Clearance: 430 mm

Rack size: 500mm x 500mm

WASH CYCLE

AC2HD: 70/100 racks per hour

AC2HD-P5: 100/150 racks per hour

POWER SUPPLY

AC2HD: 415V 3N 50Hz 32A - three phase (not plugged)

AC2HD-P5: 415V 3N 50Hz 40A - three phase (not plugged)

TECHNICAL DATA

Energy Consumption:

AC2HD: 19.04kW

AC2HD-P5: 23.74kW

Water Temp. Supply: 45°-55°C

Water Connection: 2-4 bar, 3/4"

Tanks Drain: 50mm

Wash Cycle: 70/100 racks per hour

Tanks Drain: 50mm

Water Consumption (with PRS / without PRS) :150/220 litres / per hr

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.