

1315mm Supermarket Multi Deck Showcase 2 door Glass Fridge


Our multi-deck glass door showcase refrigerator is perfect for your café, deli, mini-mart, or supermarket. It measures 1315 mm in width and 2000 mm in height. With four shelves and the unit's base available for storage, this unit has a total capacity of 750 litres for storage. With its powder-coated base and backing for simple cleaning and LED illumination on each shelf, our showcase cooler will make your products appear amazing.

When you buy from AG Equipment, you know you are getting a twenty-four-month parts and labour warranty from a trusted Australian supplier.

Carel i3F Controller

The new i3F controller is by CAREL with more than thirty years of experience in the refrigeration controller market. Customisation options, aesthetics and functionalities have been considered when commissioning the controller. Its frameless flat design and distinctive appearance blend perfectly into any fridge or freezer appliance.

- Provides Logs
- Fault alarm warnings
- Mobile connectivity with Controlla Application through BlueTooth

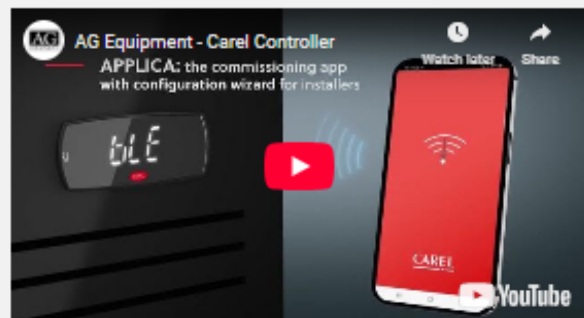

Click [here](#) to watch Carel App installation and temperature function video

Appearance

- Powder-coated shelves, back and base with glass sides and doors
- Four adjustable shelves, allowing 5 separate storage levels
- Energy efficient design with integrated front blind to keep temperatures low overnight
- Carel i3F Digital LED display and electronic temperature controller

Construction

- Powder-coated steel back and base
- 750L capacity
- 4 adjustable shelves
- Adjustable feet
- 25°C / 60% Humidity Ambient Temperature
- SECOP, SC15MNX compressors

Operation

- Temperatures set range between 0°C and +7°C, under 25°C room temperature and 60% humidity
- Electronic temperature control
- Fan-forced ventilated cooling

Installation and Maintenance

- Installed with a 15 Amp plug
- This unit must be placed on a levelled surface.
- This unit MUST not be exposed to direct or indirect sunlight or near any heat-radiated appliances.
- This unit MUST be placed leaving a minimal clearance of 20cm from the wall to the back of the unit for ventilation. Please refer to the user manual for details.
- Only suitable for indoor fully air-conditioned environment
- For optimal performance and longevity, the condenser on this unit must be cleaned monthly.

Click [here](#) to watch the installation video.

Click [here](#) to watch the maintenance video.

NOTE:- Product images are for illustration purposes only, actual products may differ in appearance.

Errors and omissions excepted (E&OE)

SPECIFICATION

AMBIENT TEMPERATURE	25°C / 60% Humidity
CAPACITY	750 Litres
CURRENT	8.7 Amp
FREQUENCY	50Hz
INPUT POWER	1390W
PACKAGE DIMENSION MM	1445(w) x 890(d) x 2180(h)
PRODUCT DIMENSION MM	1315(w) x 800(d) x 2000(h)
PRODUCT WEIGHT	278 Kg
REFRIGERANT	R290 150g
SHIPPING WEIGHT	348 Kg
TEMPERATURE RANGE	Sets between 0°C to +7°C
WARRANTY	24 Months