

1000mm Supermarket Open Multi Deck Showcase Fridge


Our open-face multi-deck Supermarket showcase refrigerator is 1000mm wide and 2000mm high, making it ideal for your café, deli, mini-mart, or supermarket. This unit has a total storage capacity of 440 litres, with four shelves and the unit's base all available for storage. Your items will look fantastic when exhibited in our showcase cooler, which has an easy-to-clean powder-coated base and backing, as well as LED lighting on each tier.

When you buy from AG Equipment, you know you are getting a twenty-four-month parts and labour warranty from a trusted Australian supplier.

Carel iJF Controller

The new iJF controller is by CAREL with more than thirty years of experience in the refrigeration controller market. Customisation options, aesthetics and functionalities have been considered when commissioning the controller. Its frameless flat design and distinctive appearance blend perfectly into any fridge or freezer appliance.

- Provides Logs
- Fault alarm warnings
- Mobile connectivity with Controlla Application through BlueTooth

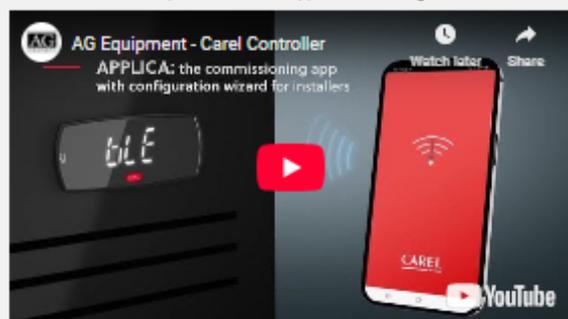

- CONTROLLA App Store / Google play
- Bluetooth Proximity Communication
- Data Logging on Internal Memory

Click [here](#) to watch Carel App installation and temperature function video

Appearance

- Powder-coated shelves, back and base with glass sides
- Four adjustable shelves, allowing 5 separate storage levels
- Energy efficient design with integrated front blind to keep temperatures low overnight
- Carel iJF Digital LED display and electronic temperature controller

Construction

- Powder-coated steel back and base
- 440L capacity
- 4 adjustable shelves
- Adjustable feet
- 25°C / 60% Humidity Ambient Temperature
- SECOP, SCE18MNX compressors

Operation

- Temperatures set range between 0°C and +7°C, under 25°C room temperature and 60% humidity
- Electronic temperature control
- Fan-forced ventilated cooling

Installation and Maintenance

- This unit MUST be placed on a levelled surface.
- This unit MUST not be exposed to direct or indirect sunlight or near any heat-radiated appliances.
- This unit MUST be placed leaving a minimal clearance of 20cm from the wall to the back of the unit for ventilation. Please refer to the user manual for details.
- Only suitable for indoor fully air-conditioned environments, following ambient temperature ratings.
- Can't be positioned adjacent to a door, or in the path of a breeze.
- For optimal performance and longevity, the condenser on this unit must be cleaned monthly.

Click [here](#) to watch the installation video.
Click [here](#) to watch the maintenance video.

NOTE:- Product images are for illustration purposes only, actual products may differ in appearance.
Errors and omissions excepted (E&OE)

SPECIFICATION

AMBIENT TEMPERATURE	25°C / 60% Humidity
CAPACITY	440 Litres
CURRENT	5.5 Amp - 8Amp
FREQUENCY	50Hz
INPUT POWER	2090W
PACKAGE DIMENSION MM	1092(w) x 890(d) x 2180(h)
PRODUCT DIMENSION MM	1002(w) x 700(d) x 2000(h)
PRODUCT WEIGHT	270 Kg
REFRIGERANT	R290 150g
SHIPPING WEIGHT	300 Kg
TEMPERATURE RANGE	Sets between 0°C to +7°C