

2 Metre Deli Showcase

Our high-quality commercial deli showcase is ideal for displaying chilled foods to your guests. It is great for butchers, delis, restaurants, cafés, bakeries, catering businesses, and any other situation where your products must be presented fashionably and professionally.

AG Equipment's attention to quality, dazzling long-lasting LED lights, high-quality glass, and internal components will make your things look better than before. When you try it, you'll wonder how you ever managed without it.


Our deli showcase has two extra doors in the lower section at the rear of the unit, opening to a large storage area.

Backed by AG Equipment's 24-month warranty you can be sure you are buying the highest quality commercial Kitchen equipment from a trusted Australian-based supplier.

Carel iJF Controller

The new iJF controller is by CAREL with more than thirty years of experience in the refrigeration controller market. Customisation options, aesthetics and functionalities have been considered when commissioning the controller. Its frameless flat design and distinctive appearance blend perfectly into any fridge or freezer appliance.

- Provides Logs
- Fault alarm warnings
- Mobile connectivity with Controlla Application through Bluetooth

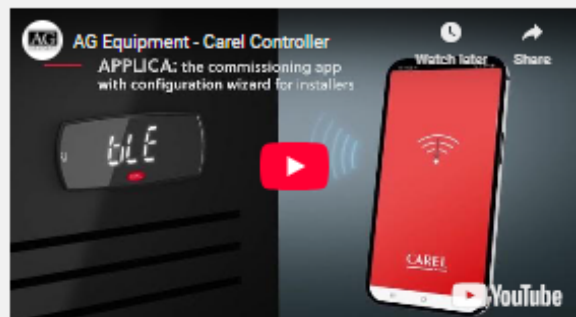

Appearance

- Frameless square glass frontage.
- 4 rear sliding access doors
- LED Lighting
- Carel iJF Digital Controller with NFC and Bluetooth connectivity

Construction

- Tempered glass 6mm thick
- Openable front glass 32° Glass shelf
- Two 600mm x 300mm rear refrigerated storage
- 460L total capacity
- Four adjustable feet
- 25°C / 60% humidity ambient temperature
- EMBARCO EMC3140U Compressor

Operation

- The temperature set range is between 0°C and +5°C
- CONTROLLA mobile app available on Android and Apple App Stores
- Electronic and Remote temperature control
- Fan-forced ventilated cooling
- Auto Defrost
- Self-evaporative drainage with manual drainage container

Installation and Maintenance

- This unit must be placed leaving clearance for ventilation. Please refer to the user manual for details.
- This unit must be placed on a levelled surface.
- Unit MUST not be exposed to direct or indirect sunlight or near any heat-radiated appliances.
- For optimal performance and longevity, the condenser filter on this unit must be cleaned monthly.

NOTE:- Product images are for illustration purposes only, actual products may differ in appearance.

Errors and omissions excepted (E&OE)

SPECIFICATION

AMBIENT TEMPERATURE	25°C / 60% Humidity
CAPACITY	460 Litres Total Capacity
CURRENT	3.5 Amp
FREQUENCY	50Hz
INPUT POWER	590W
PACKAGE DIMENSION MM	2075(w) x 1150(d) x 1270(h)
PRODUCT DIMENSION MM	1955(w) x 940(d) x 1200(h)
PRODUCT WEIGHT	212 Kg
REFRIGERANT	R290 / 150g
SHIPPING WEIGHT	263 Kg
TEMPERATURE RANGE	Sets between 0°C to +5°C