

## Commercial Four Door Worktop / Under Bench Fridge 600mm Depth

Our 4-door commercial worktop refrigerator comes with castor wheels for easy manoeuvrability and is fitted with a self-closing door, so you can let them just swing shut, saving you time and improving efficiency. This smart bench-under-bench fridge is designed for busy kitchens in pubs, restaurants, and bars. With 4 doors, each with two adjustable wire shelves, this fridge combines with a full 449-litre capacity to be utilised. This fridge can store a multitude of items. This fridge is designed to withstand high ambient temperatures and is fitted with fan-forced, ventilated cooling and electronic temperature controls.


R290 Refrigerant is non-toxic, natural and free of ozone-depleting properties. R290 is one of the most climate-friendly and cost-effective refrigerants available. Fridges and Freezers using this refrigerant are more efficient and can reduce your overall energy costs by up to 28%.

When you buy from AG Equipment, you know you're getting a twenty-four-month parts and labour warranty from a trusted Australian supplier.

### Carel iJF Controller

The new iJF controller is by CAREL, which has more than thirty years of experience in the refrigeration controller market. Customisation options, aesthetics and functionalities have been considered when commissioning the controller. Its frameless flat design and distinctive appearance blend perfectly into any fridge or freezer appliance.

- Provides Logs
- Fault alarm warnings
- Mobile connectivity with Controlla Application through Bluetooth

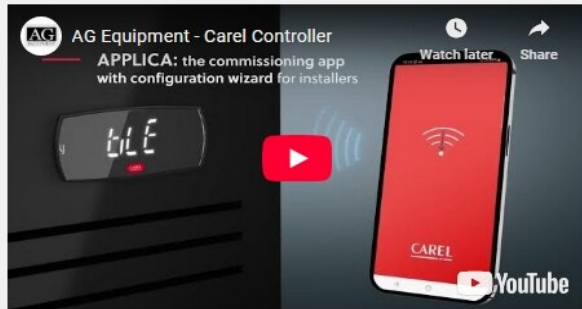

Click [here](#) to watch Carel App installation and temperature function video

### Appearance

- Recessed Handles
- Carel iJF Digital Controller with NFC and Bluetooth connectivity
- Worktop, Bench / Underbench
- 4 stainless steel doors

### Construction

- Stainless steel body and doors
- 449L capacity
- 8 adjustable wire shelves (2 per door)
- Included shelf connectors to improve flexibility
- Pre-installed castor wheels
- 43°C/65% humidity ambient temperature
- Cubigel compressor

### Operation

- CONTROLLA mobile app is available on Android and Apple App Stores
- Electronic and Remote temperature control
- The temperature set range is 2°C and 8°C
- Fan-forced ventilated cooling

### Installation and Maintenance

- This unit must be placed, leaving clearance for ventilation. Please refer to the user manual for details.
- For optimal performance and longevity, the condenser filter on this unit must be cleaned monthly.

Click [here](#) to watch the installation and maintenance video.

**NOTE: Product images are for illustration purposes only; actual products may differ in appearance. Errors and omissions excepted (E&OE)**

## SPECIFICATION

AMBIENT TEMPERATURE	43°C / 65% Humidity
CAPACITY	449 Litres
CURRENT	2.3 Amp
ENERGY CONSUMPTION	7.5 KWh/24h
FREQUENCY	50Hz
INPUT POWER	320W
INTERNAL DIMENSION MM	1665(w) x 480(d) x 560(h)
PACKAGE DIMENSION MM	2270(w) x 650(d) x 880(h)
PRODUCT DIMENSION MM	2230(w) x 600(d) x 850(h)
PRODUCT WEIGHT	101 Kg
REFRIGERANT	R290/80g
SHIPPING WEIGHT	128 Kg
TEMPERATURE RANGE	2°C - 8°C