

1000-SK-I**Low Temperature Smoker Oven**

Shown with optional burgundy exterior



- Halo Heat . . . a controlled, uniform heat source that maintains close temperature tolerances throughout the cooking and holding function. Offers uniform and consistent cooking on a daily basis, low shrinkage of bulk or portion-cut protein items, higher food moisture content, and significantly longer holding life.
- Smokes with real wood chips — no pressure cooking, no artificial smoke flavor.
- Smoke timer offers a choice of mild, medium, or heavy smoke flavor.
- Cooks, smokes, and holds meats, poultry, and fish.
- Cold smokes fish and cheese.
- Induces natural enzyme action in meat for tenderizing.
- Less energy usage than conventional ovens.
- Reduces labor and evens-out work loads.
- Non-magnetic stainless steel interior, racks, and shelves resist corrosion.
- Simple control senses temperature drops faster, providing quick heat recovery time.

Short Form Spec

Alto-Shaam double compartment 1000-SK-I Smoker oven is constructed with a stainless steel exterior. Oven includes stainless steel doors with magnetic latch. Each compartment is equipped with two (2) stainless steel side racks with eight (8) pan positions spaced on 2-5/16" (59mm) centers, two (2) stainless steel wire shelves, one (1) stainless steel rib rack, a removable stainless steel drip pan with drain and a wood chip container. Oven is furnished with an exterior, front mounted stainless steel drip tray and one (1) sample bag each of cherry, hickory, apple, and maple wood chips. Oven includes one (1) set of 5" (127mm) casters — 2 rigid, and 2 swivel with brake.

Each compartment has a simple control with an On/Off power switch; cook temperature knob, 200°F to 325°F (94°C to 160°C); hold temperature knob, 60°F to 205°F (16°C to 96°C); digital display, up/down arrows to set cook and hold time; and a sixty minute smoking timer. Control features indicator lights for the cook, hold, and smoke functions, and when the oven is calling for heat. Oven is equipped with a voltage conversion switch, located on the back of the oven, for voltage selection (208 or 240 V.A.C.) at time of installation.


- Model 1000-SK-I:** Double compartment low temperature smoker oven with simple control.

Factory-Installed Options

- Door Choices:
 - Solid Door, standard
 - Window Door, optional
- Door Swing Choices:
 - Right-hand swing, standard
 - Left-hand swing, optional
- Voltage Choices:
 - 208-240V
 - 230V
- Exterior Panel Color Choices:
 - Stainless steel, standard
 - Burgundy, optional
 - Custom color, optional
- Cooking thermostat limit set at 250°F for restricted areas of the U.S.A.
 - Specify on order as required
- Extended drip tray (not available with bumper)

Additional Features

- Rib Rack Shelf • Item SH-29474**
Special non-magnetic stainless steel wire shelf designed to hold ribs or fish in an upright position for more even smoking. Each shelf will hold thirteen full ribs. One (1) rib rack shelf is furnished with each compartment. Additional racks are available as an option. Capacity: Three (3) rib rack shelves per compartment.



**Lifetime
Warranty**

On all Cook & Hold heating elements (excludes labor).





W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.
Phone: 262.251.3800 800.558.8744 U.S.A./CANADA Fax: 262.251.7067 800.329.8744 U.S.A. only
www.alto-shaam.com



1000-SK-I

Low Temperature Smoker Oven

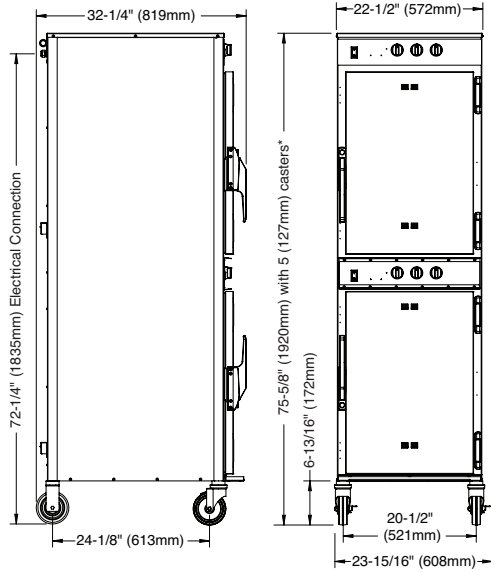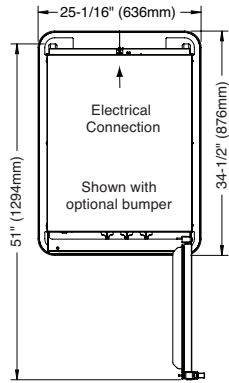

*74-1/4" (1885mm) - with optional 3-1/2" (89mm) casters
 *75-1/2" (1917mm) - with optional 6" (152mm) legs

Dimensions: H x W x D	
Exterior:	75-5/8" x 23-15/16" x 32-1/4" (1920mm x 608mm x 819mm)
Interior: (each compartment)	26-7/8" x 18-7/8" x 26-1/2" (683mm x 479mm x 673mm)

Electrical					
V	Ph	Hz	A	kW	
208	1	60	31.4	6.5	No cord or plug
240	1	60	24.3	5.8	or plug
230	1	50/60	24.1	5.5	No cord or plug

Product/Pan Capacity (per compartment)		
120 lbs (54kg) maximum		
Volume maximum: 60 quarts (76 liters)		
Three (3) — on optional wire shelves only	Full-size pans: 20" x 12" x 2-1/2"	Gastronorm 1/1: 530mm x 325mm x 65mm
	Full-size sheet pans: 18" x 26" x 1"	
Seven (7)		

Clearance Requirements	
Rear	3" (76mm) from non-heated surfaces 18" (457mm) from heat producing equipment
Top	2" (51mm)
Left, Right	1" (25mm)
Weight	
Net: 377 lb (171 kg)	Ship: 445 lb (202 kg) EST.
Carton dimensions: (L x W x H) 35" X 35" X 82" (889mm x 889mm x 2083mm)	

Installation Requirements
— Oven must be installed level.
— The oven must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.
— Appliances with casters and no cord or plug must be secured to the building structure with a flexible connector.
Not factory supplied.
— Smoker ventilation requirements to be determined by local installation codes.

Accessories	
<input type="checkbox"/> Bumper, Full Perimeter	5009767
<input type="checkbox"/> Carving Holder, Prime Rib	HL-2635
<input type="checkbox"/> Carving Holder, Steamship (Cafeteria) Round	4459
Casters, Stem - 2 rigid, 2 swivel w/brake	
<input type="checkbox"/> 3-1/2" (89mm)	5008017
<input type="checkbox"/> Door Lock with Key - each handle	LK-22567
<input type="checkbox"/> Drip Pan with Drain, 1-7/8" (48mm deep)	5005616
<input type="checkbox"/> Drip Pan without Drain 1-7/8" (48mm deep)	11906
<input type="checkbox"/> Drip Pan without Drain 4" (101mm deep)	15929
<input type="checkbox"/> Legs, 6" (152mm), Flanged (set of four)	5011149

<input type="checkbox"/> Pan Grid, Wire, 16-3/8" x 24-3/8" (416mm x 619mm) — fits inside of an 18" x 26" sheet pan	PN-2115		
<input type="checkbox"/> Security Panel w/ Key Lock	5013935		
<input type="checkbox"/> Shelf, Stainless Steel, Flat Wire	SH-2325		
<input type="checkbox"/> Shelf, Stainless Steel, Rib Rack	SH-29474		
Woodchips, bag			
	2.0 lb (.9 kg)	1.25 cu. ft. (35 L)	2.5 cu. ft. (71 L)
Cherry	<input type="checkbox"/> WC-22540	<input type="checkbox"/> WC-22541	<input type="checkbox"/> WC-37746
Apple	<input type="checkbox"/> WC-22542	<input type="checkbox"/> WC-22543	<input type="checkbox"/> WC-37747
Maple	<input type="checkbox"/> WC-22544	<input type="checkbox"/> WC-22545	<input type="checkbox"/> WC-37748
Hickory	<input type="checkbox"/> WC-2828	<input type="checkbox"/> WC-2829	<input type="checkbox"/> WC-37749



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.
 Phone: 262.251.3800 800.558.8744 U.S.A./Canada Fax: 262.251.7067 800.329.8744 U.S.A. only
 www.alto-shaam.com