



RAPID FRYER SERIES: RF-600

Single Pan Three Basket Rapid Fryer

Project: _____ Item: _____



RF-600

Standard Features:

- AISI Grade Stainless Steel
- Stainless steel constructed pan with center cool zone – 1.5mm Thick
- Efficient multi-jet target burner
- +/- 3°C temperature recovery differential
- Over-temperature safety cut-out switch
- 30L oil capacity
- Flame Failure - Included as standard
- Piezo ignition to pilot multi-jet target burner
- Inclined base provides greater ease in oil and waste removal
- Complete with baskets, wire tray, night cover & lift off basket hanger
- Front access to all components creates ease of service
- Pan Dimensions: 370mm L x 500mm W x 80mm H
(Height is measured from the wire tray to the oil level mark)




Options:

- Natural or LPG Gas
- Non-swivel rear castors – Set of two

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

Specifications:

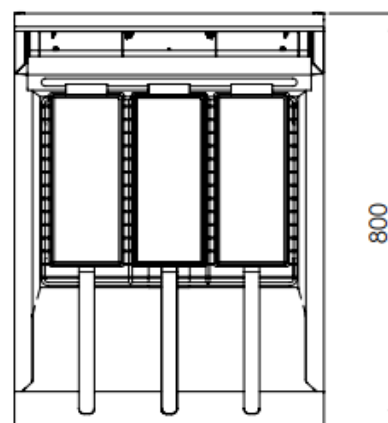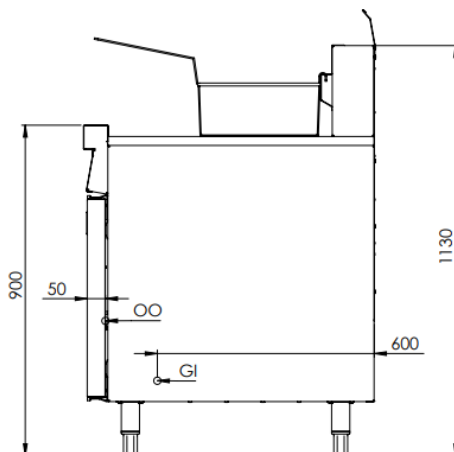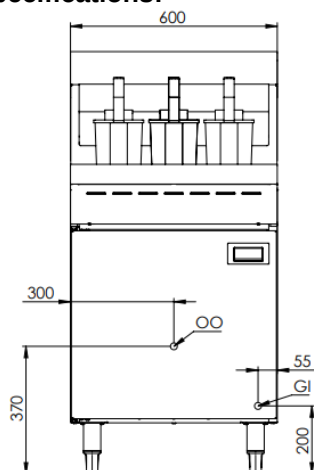

MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)	GAS CONSUMPTION (Mj/h)	
					NG	LPG
RF-600	600	800	1130	-	125	125

Connections:

GAS (GI) (BSP)	OIL OUTLET (OO) (BSP)	SUPPLY PRESSURE (kPa)	
		NG	LPG
3/4" (F)	1 1/4" (F)	1.0	2.6

- Combination control valve with inbuilt regulator is supplied within the unit
- **Must** be installed by an authorised installer in accordance to **AS/NZS5601** refer to current version

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specification without notice.

Approval Number: GMK 10683



B+S Commercial Kitchens
57 Plateau Road Reservoir VIC 3073 Australia | +61 3 9469 4754
info@bscommercialkitchens.com | www.bscommercialkitchens.com

