


16 TRAY / 2.56 M² TRAY AREA COMMERCIAL-GRADE DEHYDRATOR

COMMERCIAL USE • EASY TO MAINTAIN • FULLY STAINLESS STEEL

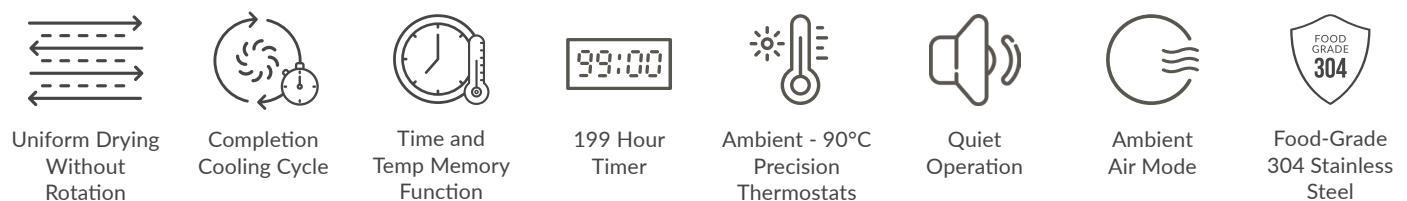

16CUDG SPECIFICATIONS

Max Power Usage	1.5 kW	Total Tray Area	2.56 m ²
Avg Power Usage	750 W	Total Trays	16
Voltage / Frequency	220-240V/50-60HZ	Tray Dimensions	40 x 40 cm
Max Amperage	8A	Space Between Trays	35 mm
Safety Breaker Required	Single Phase/10A (Standard Household Outlet)	Tray Mesh Spacing	14 x 14 mm
Temperature Range	15°C - 90°C (1°C Increments), plus Ambient Air Mode	Machine Weight	30kg
Timer	0 - 199hr	Product Dimensions (W x H x D)	470 x 730 x 575 mm
Independent Zones	1	Chamber Dimensions (W x H x D)	415 x 580 x 400 mm
Average Noise Level	40 dB (Quiet)	Chamber Volume	96L / 0.096 m ³
Product Materials	Food grade 304 stainless steel trays; Commercial grade stainless steel housing & latches; Aluminium door handle; Tempered glass observation window; Control Panel with PVC finish.		
Certifications	ANSI/NSF4, UL/cUL, RCM, AS/NZS 4417, CE, UKCA		