

LATITUDE LS

SINGLE-TIER ISLAND DISPLAY



CHILLER



R290



PLUG-IN

FEATURES INCLUDE

- Fully ventilated
- High efficiency fan motors
- Polycarbonate end walls
- Two case depths available
- Castor wheels
- Perimeter bumper
- Cases achieve 3M0/3M1/3M2 (subject to load limit)
- Display deck adjustable height: 4 rear positions (0°, 3°, 6°, 9°).




Scan here to check for
Energy Efficiency Rebates
in your state.



The technical drawing illustrates the dimensions of the 1000 Series Benchtop Model 1000-1000. The top view shows a rectangular unit with a total width of 985 mm and a total depth of 630 mm. The main body is 660 mm wide and 530 mm deep. There are 130 mm wide side flanges on both sides. The front panel features a central control area with a width of 700 mm and a height of 175 mm, and a lower section with a width of 100 mm. The side view shows a total height of 920 mm, with a base height of 480 mm. The base has a width of 925 mm and a depth of 115 mm. The main body has a height of 30 mm and a width of 160 mm. The base has a width of 188 mm and a depth of 187 mm. The side flanges have a height of 30 mm and a width of 161 mm. The base has a width of 113 mm and a depth of 112 mm.

LS Modular

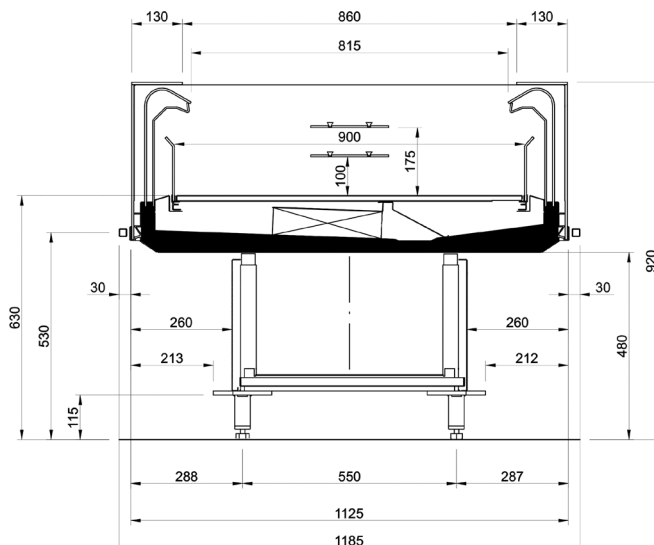

LS Volum

LATITUDE	LS MODULAR		LS VOLUM
OPERATING TEMP (°C)	2-4°C		
REFRIGERATION	Ventilated / R290		
DEFROST	Automatic / Hot Gas		
POWER SUPPLY	240V / 1Ph / 10 Amp plug		
ENERGY CONSUMPTION (kWh/24h)	6.9	8.3	
DISPLAY SURFACE (m²)	1.22	1.5	
LENGTH INCLUDING BUMPERS (mm)	1310	1310	
HEIGHT INCLUDING CASTORS (mm)	920	920	
DEPTH INCLUDING BUMPERS (mm)	985	1185	

* Climate class 3 (25 °C, 60% R/H)

