

The Easy Clean – Norm 12 shelving system offers optimum cleanliness and maximum hygiene. Upright posts and support bars are made from anodized aluminum while light weight shelf plates are made from polystyrene.

THE EASY CLEAN SHELVING SYSTEM IS:

- **Easy to assemble** – The individual segments of the polymer louvred shelf can easily be placed on the aluminum support bars.
- **Easy to adjust** – Depending on what you want to store, the individual shelves can be replaced and positioned without the need for tools, at any time, even after assembly.
- **Easy to clean** – To ensure maximum hygiene, the individual segments of polymer shelves can be thoroughly cleaned in a dishwasher. Plastic closure caps on upright posts keeps dust out.
- **Extendable** – Can be built around a 90° corner using corner hooks, no need for an additional upright – providing greater storage capacity, freely accessible storage areas and better use of space.
- **Rigid** – Cross braces on every third shelf section ensure that the whole shelving unit is stable.
- **Stable** – The captive, height-adjustable screw feet provided as standard compensate for any unevenness in the floor of up to 25mm. If the local conditions of the storage space require it, ceiling, floor and wall fastenings are available.
- **Flexible** – Bracing bars as an alternative to cross braces, for maximum access to the stored items from all sides when the shelving is mounted away from the wall.
- **Strong** – Polymer slatted shelf made from individual segments of heavy-duty polystyrene. Available with either slotted or solid shelves.

DIMENSIONS

Heights: 1200, 1400, 1600, 1800 & 2000mm

Widths: 600, 800, 900, 1000, 1200, 1400, 1500

Depths: 400, 500 & 600mm

TECHNICAL DATA

Maximum bay load: 600kg



Maximum shelf load with evenly distributed load:

600 – 1200 mm wide: 150kg

1400 – 1500 mm wide: 100kg

Temperature Range: - 40°C to 60°C

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

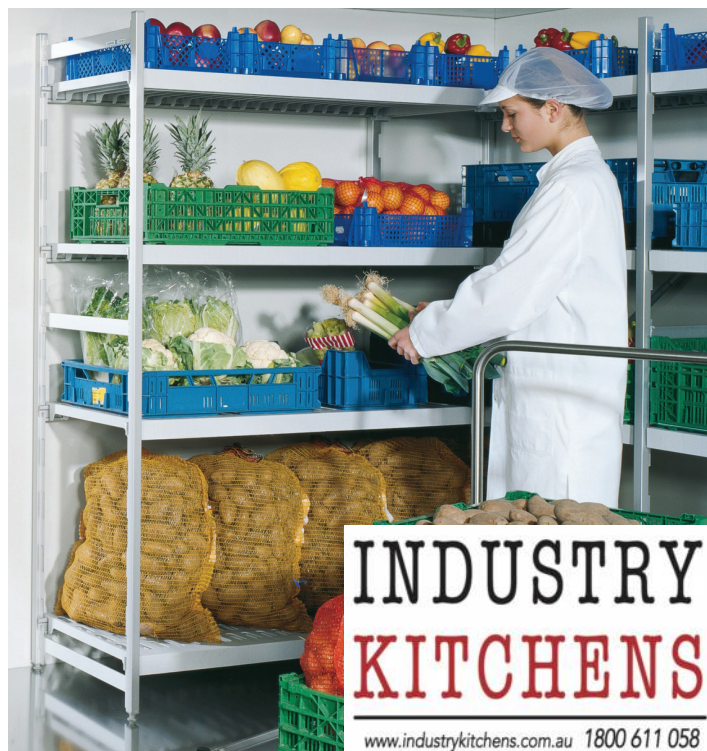

The Easy Clean Shelving System is available in 4 tier (4T) and 5 tier (5T).

Height (mm)	Width (mm)	Upright 400mm deep Article Code #		Upright 500mm deep Article Code #		Upright 600mm deep Article Code #	
		Starter Kit	Add On	Starter Kit	Add On	Starter Kit	Add On
1800	600	EC1860404TSL	EC1860404TSLA	EC1860504TSL	EC1860504TSLA	EC1860604TSL	EC1860604TSLA
		EC1860405TSL	EC1860405TSLA	EC1860505TSL	EC1860505TSLA	EC1860605TSL	EC1860605TSLA
	800	EC1880404TSL	EC1880404TSLA	EC1880504TSL	EC1880504TSLA	EC1880604TSL	EC1880604TSLA
		EC1880405TSL	EC1880405TSLA	EC1880505TSL	EC1880505TSLA	EC1880605TSL	EC1880605TSLA
	900	EC1890404TSL	EC1890404TSLA	EC1890504TSL	EC1890504TSLA	EC1890604TSL	EC1890604TSLA
		EC1890405TSL	EC1890405TSLA	EC1890505TSL	EC1890505TSLA	EC1890605TSL	EC1890605TSLA
	1000	EC1810404TSL	EC1810404TSLA	EC1810504TSL	EC1810504TSLA	EC1810604TSL	EC1810604TSLA
		EC1810405TSL	EC1810405TSLA	EC1810505TSL	EC1810505TSLA	EC1810605TSL	EC1810605TSLA
	1200	EC1812404TSL	EC1812404TSLA	EC1812504TSL	EC1812504TSLA	EC1812604TSL	EC1812604TSLA
		EC1812405TSL	EC1812405TSLA	EC1812505TSL	EC1812505TSLA	EC1812605TSL	EC1812605TSLA
	1400	EC1814404TSL	EC1814404TSLA	EC1814504TSL	EC1814504TSLA	EC1814604TSL	EC1814604TSLA
		EC1814405TSL	EC1814405TSLA	EC1814505TSL	EC1814505TSLA	EC1814605TSL	EC1814605TSLA
	1500	EC1815404TSL	EC1815404TSLA	EC1815504TSL	EC1815504TSLA	EC1815604TSL	EC1815604TSLA
		EC1815405TSL	EC1815405TSLA	EC1815505TSL	EC1815505TSLA	EC1815605TSL	EC1815605TSLA