

BTGHT6 TOWER SERIES HEATED

BTGHT6








PRODUCT FEATURES

- Single glazed hinged rear door
- Deck forced heating
- Single glazed
- Solid front or sliding front doors
- Four adjustable shelves - flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

Maximum shelf load weight 15kg spread evenly

BTGHT6-SD

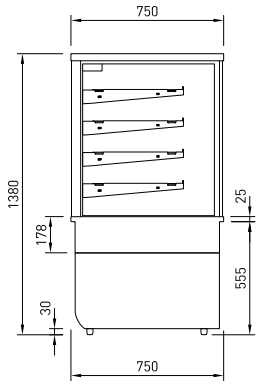

REAR VIEW

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]									KW 230V	AMP	NZ/AUS 3 PIN	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGHT6 BTGHT6-SD	600	750	1380	118	4 + BASE	75-85	490 X 445	540 x 510	100	1.14	0.29	50/60 HZ	1.24	5.4	10 AMP	3 PIN PLUG	220-240V	700	830	1550	121