

# BTGRF15 TOWER SERIES REFRIGERATED

BTGRF15




## PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors
- Solid front or sliding front doors
- Deck forced refrigeration
- Three adjustable shelves - flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

Maximum shelf load weight 15kg spread evenly  
All units rear venting

BTGRF15-SD

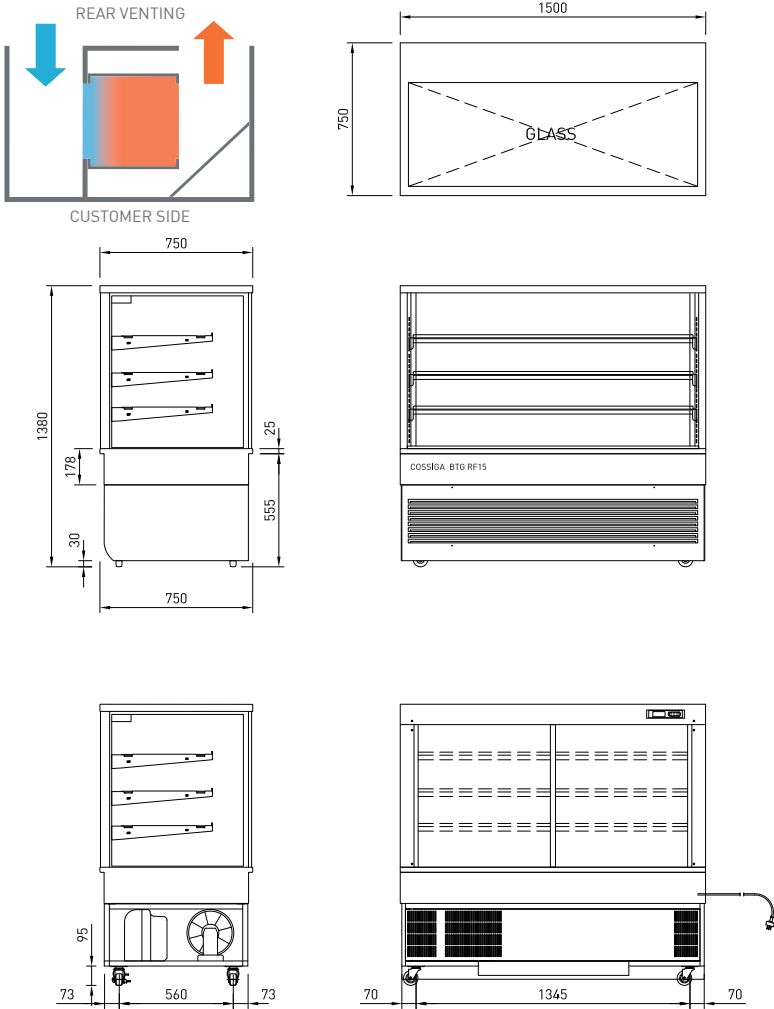

REAR VIEW

## CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL                 | CABINET     |            |             | SHELVING | SHELVING | OPERATING TEMP | SHELF      | BASE TRAY  | TOTAL FOOD | DISPLAY M <sup>2</sup> | INTERNAL VOLUME M <sup>3</sup> | FREQUENCY | REFRIGERANT | POWER   |     | CONNECTION ELECTRICAL POWER CORD 2200MM |            | VOLTAGE  | PACKED FOR SHIPPING |            |             |        |
|-----------------------|-------------|------------|-------------|----------|----------|----------------|------------|------------|------------|------------------------|--------------------------------|-----------|-------------|---------|-----|-----------------------------------------|------------|----------|---------------------|------------|-------------|--------|
|                       | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] |          |          |                |            |            |            |                        |                                |           |             | KW 230V | AMP | NZ/AUS 10 AMP                           | UK 13 AMP  |          | LENGTH [MM]         | DEPTH [MM] | HEIGHT [MM] | WEIGHT |
| BTGRF15<br>BTGRF15-SD | 1500        | 750        | 1380        | 329      | 3 + BASE | 3-5            | 1390 X 445 | 1440 x 510 | 285        | 2.59                   | 0.75                           | 50/60 HZ  | R290        | 1.91    | 8.3 | 3 PIN PLUG                              | 3 PIN PLUG | 220-240V | 1600                | 830        | 1550        | 337    |