


BTGRF18 TOWER SERIES REFRIGERATED

BTGRF18



PRODUCT FEATURES

- Heated double glazed glass top, sides and front
 - Solid front glass
 - Heated rear sub frame
 - Argon filled rear doors
 - Sliding rear doors
 - Deck forced refrigeration
 - Three adjustable shelves - flat or angled
 - Ticket strips on shelves and base
 - Under shelf and canopy LED lights
 - Integral condenser
- Maximum shelf load weight 15kg spread evenly
All units rear venting

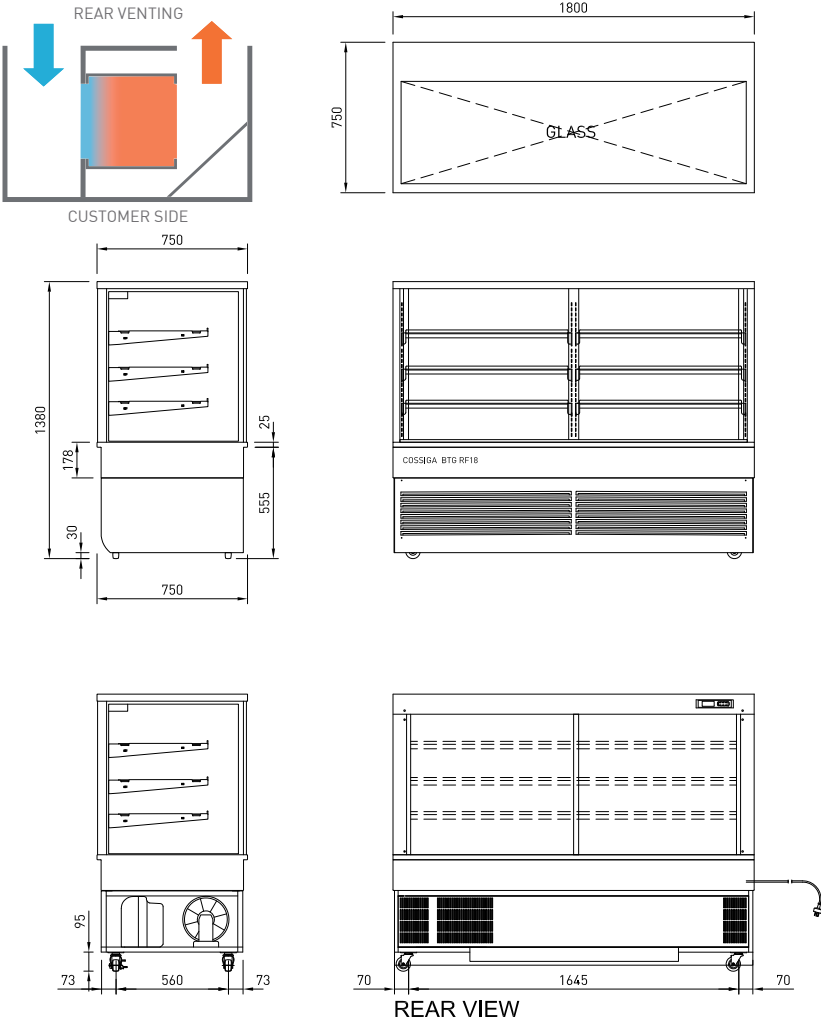

REAR VIEW

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			SHELVING	SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]											KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGRF18 BTGRF18-SD	1800	750	1380	380	3 x 2 + BASE	3-5	827 X 445	1740 x 510	325	3.14	0.91	50/60 HZ	R290	1.72	7.5	3 PIN PLUG	3 PIN PLUG	220-240V	1900	830	1550	388