

Start Strong with Basics Plus



**INDUSTRY
KITCHENS**

www.industrykitchens.com.au 1800 611 058

- Lifetime warranty against rust and corrosion.
- Easy to clean and adjust.
- Simple to assemble straight from the box.


CAMBRO
TRUSTED FOR GENERATIONS™

The New CAMSHELVING® **BASICS PLUS** series

Strong yet cost-efficient, Basics Plus Series can handle the demands of any foodservice operation. Minimize total cost without sacrificing quality or stability with new Basics Plus Series.

Available in:

Dimensions	Shelves	Ordering code
460 X 915 X 1830MM	4 TIER	CBU183672V4580
460 X 1070 X 1830MM	4 TIER	CBU184272V4580
460 X 1220 X 1830MM	4 TIER	CBU184872V4580
460 X 1525 X 1830MM	4 TIER	CBU186072V4580
610 X 915 X 1830MM	4 TIER	CBU243672V4580
610 X 1070 X 1830MM	4 TIER	CBU244272V4580
610 X 1220 X 1830MM	4 TIER	CBU244872V4580
610 X 1525 X 1830MM	4 TIER	CBU246072V4580



Breakaway dovetail design speeds up and organizes installation.



Large traverse end piece wraps securely onto post for maximum stability.






Shelf plates are easy to remove and run through the dishwasher.



Hefty dovetails keep shelves securely in place.



Vented shelves for many applications.



Use dunnage stands for added support.



Complete Foodservice Solutions with Premium and Elements Xtra Shelving

Cambro is proud to offer our Camshelving Design Service (CDS), which creates a custom shelving plan for you that maximizes space and creates an efficient operational flow. With some simple information, our expert shelving consultants will prepare 2D and 3D floor plans so you can see how your new shelving will look and function.

It's Simple to Get Started!

Basic Plus Weight Bearing Capacity

Weight must be evenly distributed across the entire shelf.

SINGLE UNIT		UNIT LENGTH	UNIT LENGTH
		765 – 1220 MM	1375 – 1525 MM
Unit only		800 kg (TUV)	800 kg (TUV)
Shelf only		190 (TUV)	180 (TUV)
Unit with dunnage stand*		885	880
Bottom shelf with dunnage stand*		275	260

* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Highly recommended for Starter Units 1375 mm and longer.




 TUV CERTIFICATION
WEIGHT BEARING CAPACITY



COMPONENT

Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, and Identification Tags are not NSF listed.

Product specifications are subject to change without prior notification.

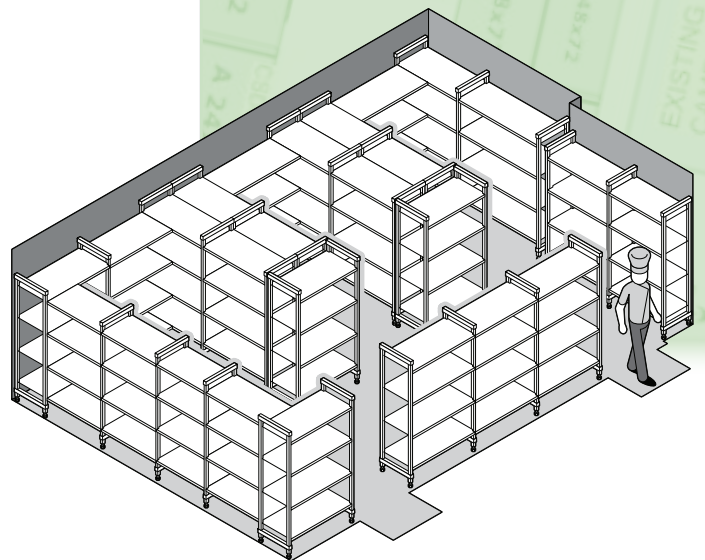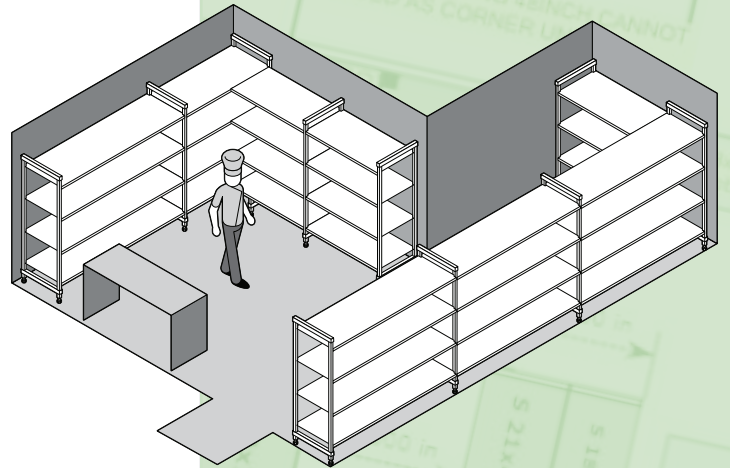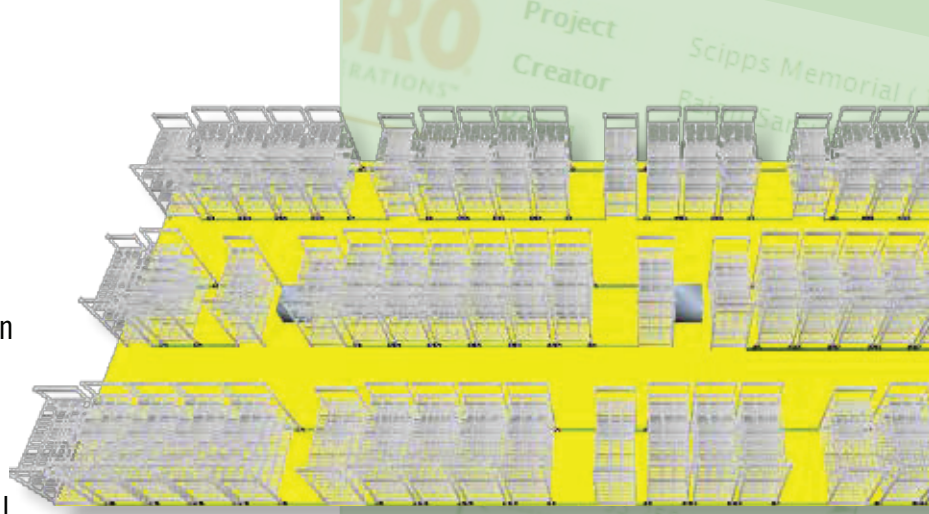

Basic Plus Optional Accessories

- Bottom Shelf Dunnage Stands (Low or Tall)
- Shelf Identification Tags
- Shelf Divider Panel

