SPECIFICATION SHEET MODEL: P500DUO

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

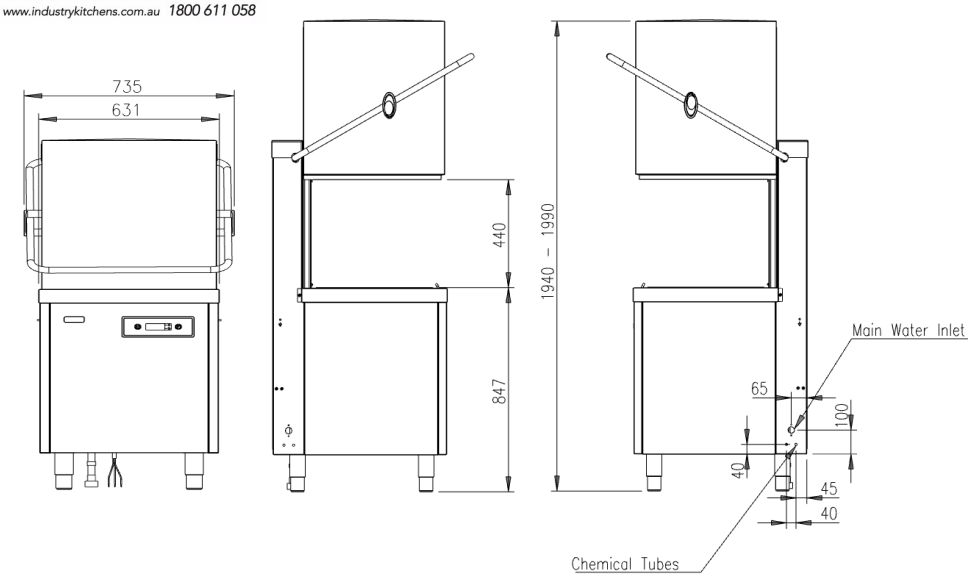

TECHNICAL INFORMATION	
Dimensions	630w x 735d x 1470-1960h
Rack Dimension	500 x 500
Clear Entry Height	440
Rinse Water Consumption	3.25L Per Cycle
WATER CONNECTIONS	
Connection Point	3/4 inch (19mm)
Inlet Temperature	60c Max
Flow Rate	11 L/Min
Flow Pressure	0.5 bar
ELECTRICAL	
3 Phase (Standard)	415v 3P 50Hz - 20amp (TCL 9.32Kw)
GENERAL DATA	
Weight (Net/Gross)	137Kg / 185Kg
Tank Capacity	39L
Noise Emission	70dB(A)
Cycle Times	1.5 / 3.0 / 5.0 Minute
Theoretical Capacity	720 plates per hour

STANDARD INCLUSIONS
1x 3 Phase Lead
1x 1M Flexible Water Connection Hose
1x 1M Flexible Waste Hose
1x 500 x 500 Flat Cup Basket
1x 500 x 500 Peg Plate Basket
1x 8 Compartment Cutlery Basket

STANDARD FEATURES

- LCD control with digital temperature
- display
- Drain pump
- Rinse pump
- Integrated chemical pumps
- Dual filtration
- 'Air gap' back flow prevention
- Anti-block wash arms, lightweight
- and easy to remove for cleaning
- Made in UK
- Watermark approved
- Suitable for straight and
- corner operation

CLASSEQ AUSTRALIA 1 Glendenning Road, Glendenning NSW 2761
P: (02) 9645 3221 E: sales@Classeq.com.au W: classeq.com.au
@classeqau in classeq-australia

CLASSEQ