


CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET			WEIGHT	BENCH TOP CUT OUT HOLE SIZE	TEMP RANGE	DISPLAY AREA	FREQUENCY	OPERATING CURRENT WITH LAMPS	POWER WITH LAMPS	CONNECTION ELECTICAL POWER CORD 3000MM	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	KG		DEG C	M2			KW 230V	NZ/AUS/UK		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]
LSCM3-FS	1145	690	555	139	1115x672	75 - 95	0.51	50/60 HZ	11.7 AMP	2.691	15 AMP LEAD ONLY	220-240V	1250	770	410	139
LSCM4-FS	1485	690	555	166	1455x672	75 - 95	0.68	50/60 HZ	15.7 AMP	3.611	20 AMP LEAD ONLY	220-240V	1590	770	410	166
LSCM5-FS	1825	690	555	199	1795x672	75 - 95	0.86	50/60 HZ	19.6 AMP	4.508	20 AMP LEAD ONLY	220-240V	1930	770	410	199
LSCM6-FS	2165	690	555	230	2135x672	75 - 95	1.04	50/60 HZ	23.5 AMP	5.405	30 AMP LEAD ONLY	220-240V	2270	770	410	230

PRODUCT FEATURES

- Ceramic Heated Glass
- Overhead Halogen Lamps
- Digital thermostatic controller
- Heat indicating LED lights

LSCM-FS LEFT SIDE ELEVATION

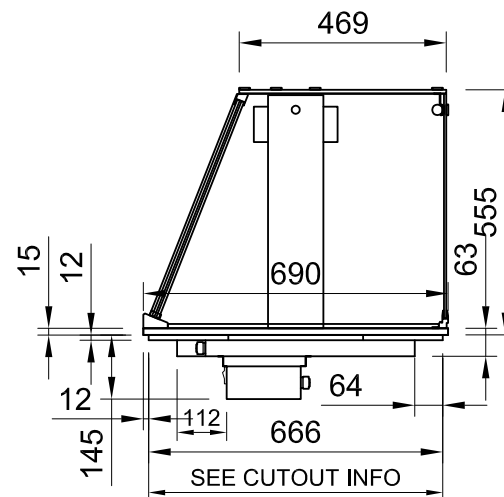

ELECTRICAL POWER

Electrical power cord 3000mm 1 phase
connection required.
Unit must be hard wired on site to isolation
switch.

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

ASSEMBLY REQUIRED


Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

LSCM-FS


LINEAR SERIES - CERAMIC HEATED GLASS - Full Square Glass

COSSIGA


LSCM3-FS

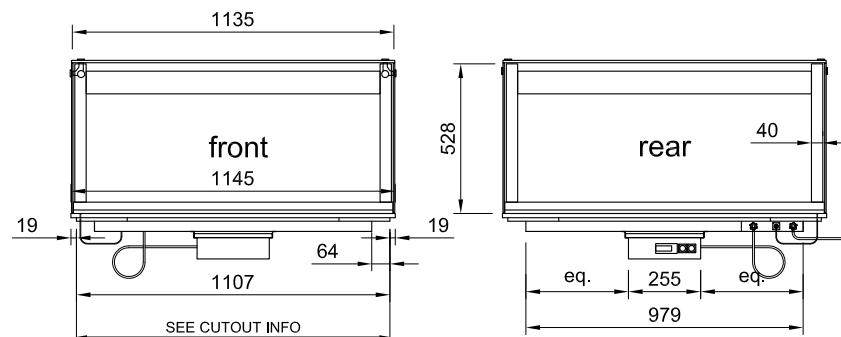

LSCM4-FS

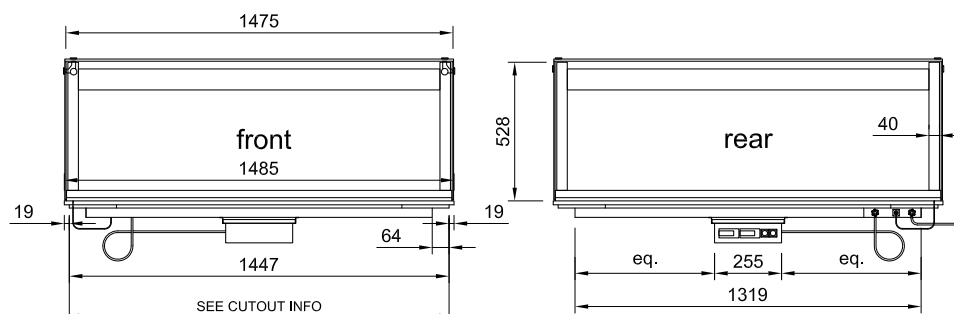

LSCM5-FS

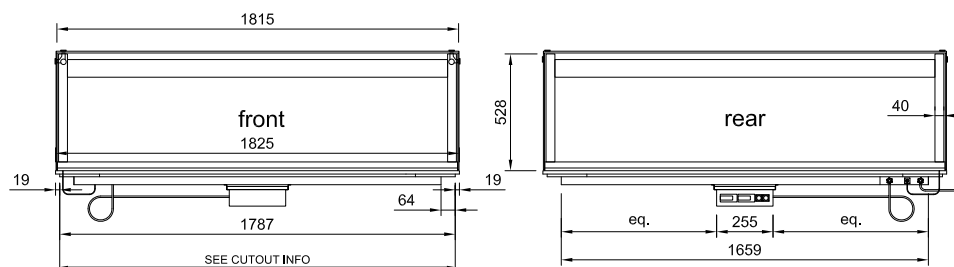

ASSEMBLY REQUIRED