

LSRF-FS LINEAR SERIES - CHILLED WELL - Full Square Glass Gantry

COSSIGA


CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET				BENCH TOP CUT OUT HOLE SIZE	PANS	TEMP RANGE	REFRIGERANT	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 3000MM		VOLTAGE	PACKED FOR SHIPPING		
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]		65MM	DEG C			KW 230V	AMPS	NZ 10 AMP	UK 13 AMP		DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]
LSRF2-FS	805	690	555	105	785x670	2 x 1/1 65mm Gastro Pan	3-8	R290	50 HZ	0.92	4.8	3 PIN PLUG	3 PIN PLUG	220-240V	910	770	108
LSRF3-FS	1145	690	555	128	1125x670	3 x 1/1 65mm Gastro Pans	3-8	R290	50 HZ	0.92	4.5	3 PIN PLUG	3 PIN PLUG	220-240V	1250	770	134
LSRF4-FS	1485	690	555	152	1465x670	4 x 1/1 65mm Gastro Pans	3-8	R290	50 HZ	0.92	4.5	3 PIN PLUG	3 PIN PLUG	220-240V	1590	770	160
LSRF5-FS	1825	690	555	179	1805x670	5 x 1/1 65mm Gastro Pans	3-8	R290	50 HZ	0.92	4.8	3 PIN PLUG	3 PIN PLUG	220-240V	1930	770	180
LSRF6-FS	2165	690	555	201	2145x670	6 x 1/1 65mm Gastro Pans	3-8	R290	50 HZ	1.15	5.5	3 PIN PLUG	3 PIN PLUG	220-240V	2270	770	204

PRODUCT FEATURES

- Deck forced refrigeration
- Canopy LED light
- Integral condenser
- Self evaporating
- 65mm deep full size pan supplied
- Foam insulated double skin base

LSRF-FS SIDE ELEVATIONS

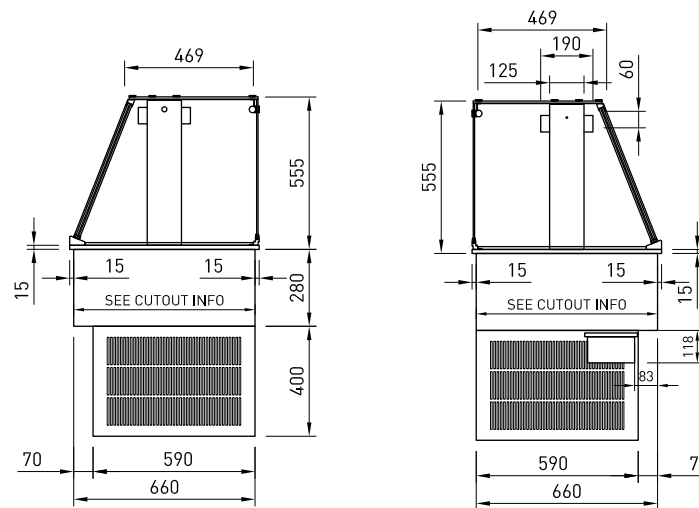

LEFT


RIGHT

GASTRO PANS

Units supplied with 1/1 pans at 65mm deep, max pan depth is 100mm

ELECTRICAL POWER



Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operation
temperature climate class N max 32° C.





ASSEMBLY REQUIRED

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents



LSRF2-FS

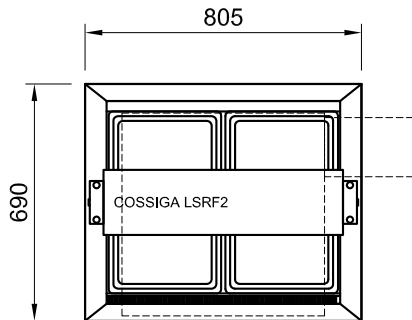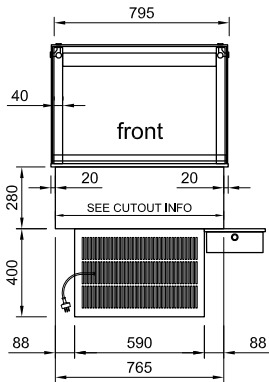

LSRF3-FS

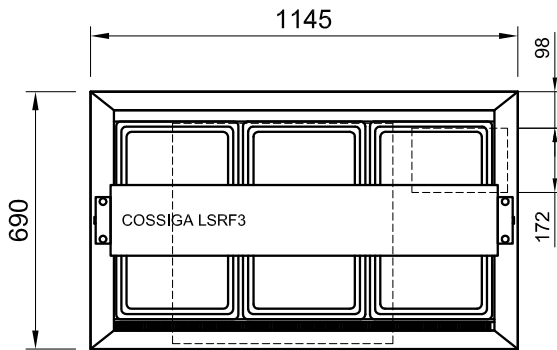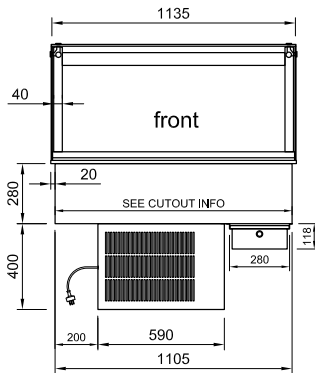

LSRF4-FS

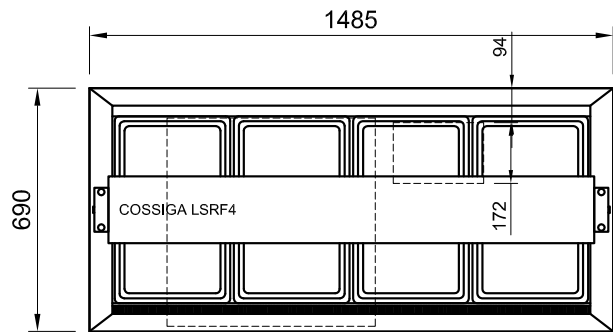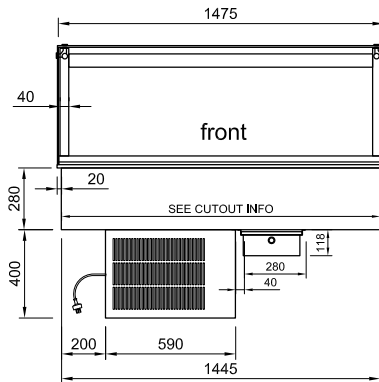

ASSEMBLY REQUIRED