

SPECIFICATIONS

CCB1000-WHT/WHT-GG



2-dr Bottom Mount Merchandiser

CyberChill

precision
refrigeration

**INDUSTRY
KITCHENS**

www.industrykitchens.com.au 1800 611 058

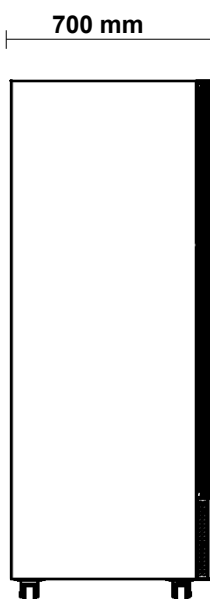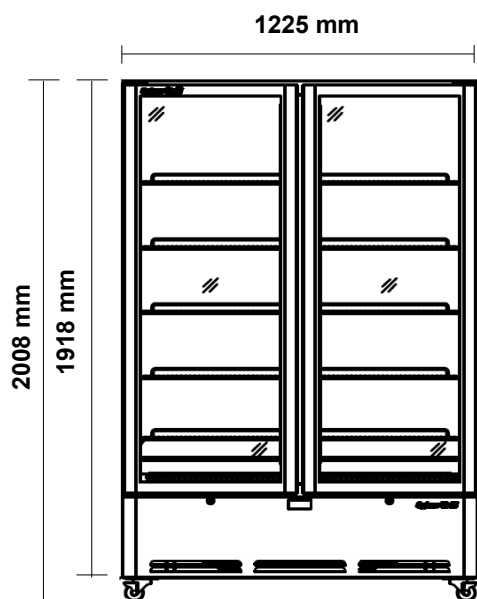

Specifications

Refrigeration system	Self-contained, bottom mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	138 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	tbc
Nominal capacity	590 Watts @ -5°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	50mm thick, high density CFC, HCFC & HFC free Zero ODP injected PUR insulation		
Cabinet body	White Powder Coated Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	+1°C to +4°C up to 40°C ambient		
kWh/24hr	3.89 kWh	Star Rating	8 Stars
Cabinet internal volume	1000 litres	Net usable GN volume	tbc
Weight	250 kg	dBa	tbc
Lightbox	n/a		
Door Opening	2 x Self-Closing Lockable Door(s)		
Door Configuration	2 x Double Glazed LowE Argon filled Glass Doors;		
Shelves	5 x shelves & shelf clips per door		Total = 10
Options	Solid/Glass Doors, Legs/Castors, Black/White/SS Exterior, etc.		
Cabinet dimensions	External	Internal	
Width	1225 mm	1125 mm	
Depth	700 mm	610 mm	
Height	1918 mm (excl. legs or castors)	1445 mm	