


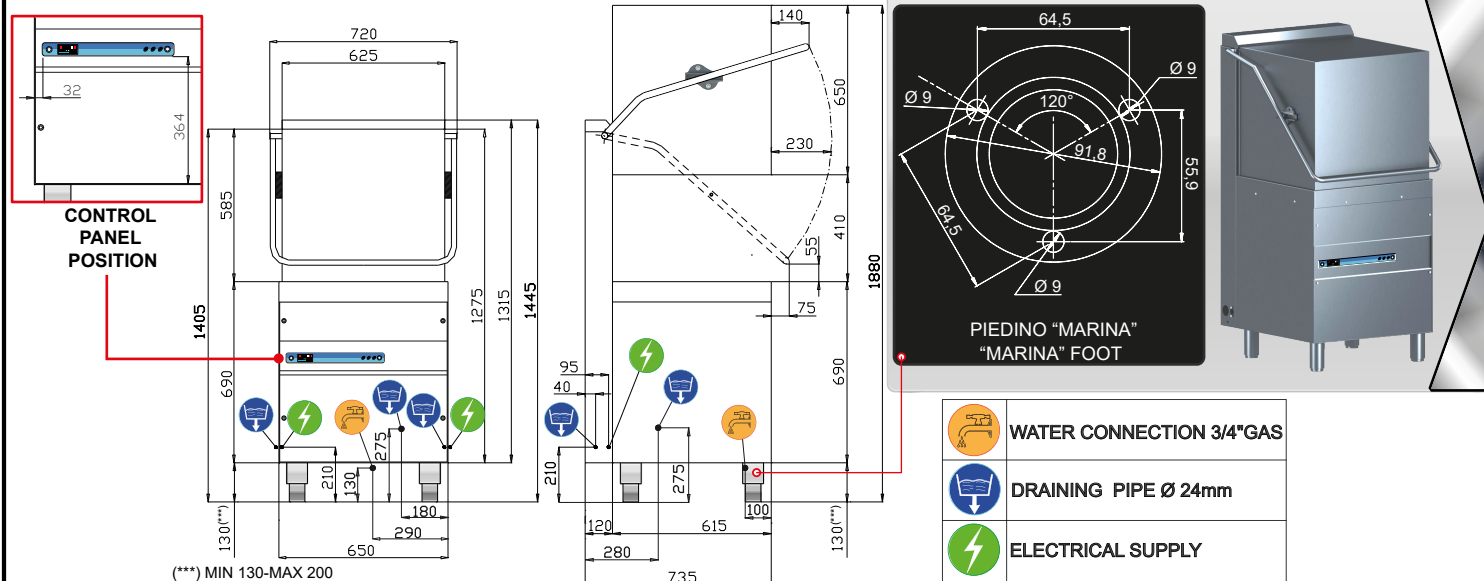

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
width		720 mm			
depth		735 mm			
height		1445/1880(open hood) mm			
WEIGHT		100 kg			
VOLTAGE		400V 3N 50Hz			
POWER REQUIRED		10120 W			
WATER HARDNESS		2-8 °F			
INLET WATER PRESSURE		200-400 kPa			
CROCKERY DIMENSIONS					
plates diameter		410 mm			
trays max. dimension		GASTRONORM 1/1 (530x325)			
RACK DIMENSION		500X500 mm			
RACK EQUIPMENT		2XC40 - 1XC44 - 2X15060			
WASHING CYCLES (sec)		1(50)	2(80)	3(120)	4(180)
WATER SUPPLY 55°C					
racks/h(*) ⁽¹⁾		72	45	30	20
WATER SUPPLY 10°C					
racks/h(*) ⁽¹⁾		31	31	30	20
WATER CONSUMPTION / CYCLE (water pressure 200kPa)		2.8 l			
BOILER CAPACITY		10 l			
BOILER HEATING ELEMENT		9000 W			
RINSING TEMPERATURE (SET)		85°C			
TANK CAPACITY		30 l			
TANK HEATING ELEMENT		2700 W			
TANK TEMPERATURE (SET)		55°C			
PUMP POWER		1120 W(630 L/min***)			
DRAIN PUMP (optional)		25W h MAX scarico 0,8m(40L/min***)			
NOISE		63,6±0.7 dB(A)			

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.