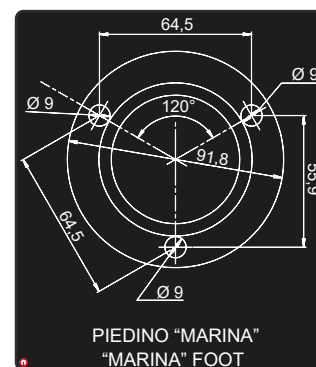
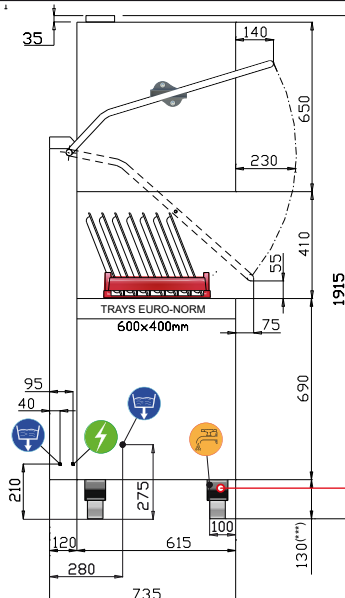
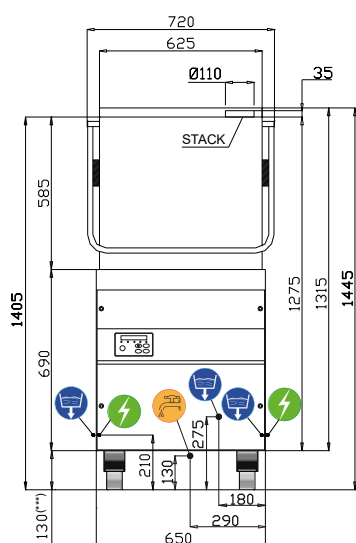


(***) MIN 130-MAX 200 mm

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
width	720 mm				
depth	735 mm				
height	1445/1915(open hood) mm				
WEIGHT(basic version)	104 kg				
VOLTAGE	400V 3N 50Hz				
POWER REQUIRED	10490 W				
WATER HARDNESS	2-8 °F				
INLET WATER PRESSURE	200-400 kPa				
CROCKERY DIMENSIONS					
plates diameter	410 mm				
trays max. dimension	600X400 mm				
RACK DIMENSION	500X500+SPECIAL STEEL RACK 500X600 mm				
RACK EQUIPMENT	1XC44 - 1XC86/A - 1X11600054				
WASHING CYCLES (sec)	1 (50)	2 (90)	3(120)	4(180)	5(300)
WATER SUPPLY 55°C					
racks/h(*) ⁽¹⁾	72	40	30	20	12
WATER SUPPLY 10°C					
racks/h(*) ⁽¹⁾	35	35	30	20	12
WATER CONSUMPTION / CYCLE	2.6 l				
BOILER CAPACITY	15 l				
BOILER HEATING ELEMENT	9000 W				
RINSING TEMPERATURE (SET)	85°C				
TANK CAPACITY	42 l				
TANK HEATING ELEMENT	2700 W				
TANK TEMPERATURE (SET)	55°C				
PUMPS POWER washing	1490 W (800 l/min***)				
DRAIN PUMP (optional)	25 W (40 l/min***)				
NOISE	61.3±0.7 dB(A)				

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.