LP1 S5 PLUS

WAREWASHERS

Range: LP

Introducing our wide range of professional warewashers, designed to meet the needs of every sector, from catering to industry. The LP line includes versatile solutions, designed to ensure impeccable hygiene and thorough cleaning of different types of objects, without compromising efficiency and ease of use.

Whether we talk of catering, pastry laboratories or industries, our goal is to provide tools that improve productivity and respond to daily challenges. The LP range can transform the way you work, facilitating cleaning operations and ensuring high hygiene standards.

Let yourself be inspired by the endless possibilities we offer for a professional, efficient and tailor-made washing experience for your needs.



FEATURES

- 4 customizable wash cycles
- High capacity in small dimensions
- Versatility of use
- Double skin
- Deep-drawn tank
- Trays (600x400 mm with 90° angle) and EURONORM crates 600x400x400 H (with specific griddle 575010)
- Self-cleaning cycle
- The PLUS System ensures optimal and constant rinsing performance thanks to the combination of Break Tank, atmospheric boiler and rinse pump

OPTIONS

- Special voltages
- Multivoltage: easy-change voltage setting directly from the cables connection
- Additional boiler power for cold water supply
- Drain pump
- Built-in peristaltic detergent dispenser
- WRAS Break Tank
- DVGW Break Tank
- Probes for lack of detergent and rinse aid detection
- CONNECTIVITY remote control HACCP ready

Option compatibility to be confirmed by the manufacturer after verification

CAPACITY



500x610


RACK EQUIPMENT

- 1 X 575005
- 1 X C132
- 1 X 575010
- 1 X C86/A



LP1 S5 PLUS

WAREWASHERS

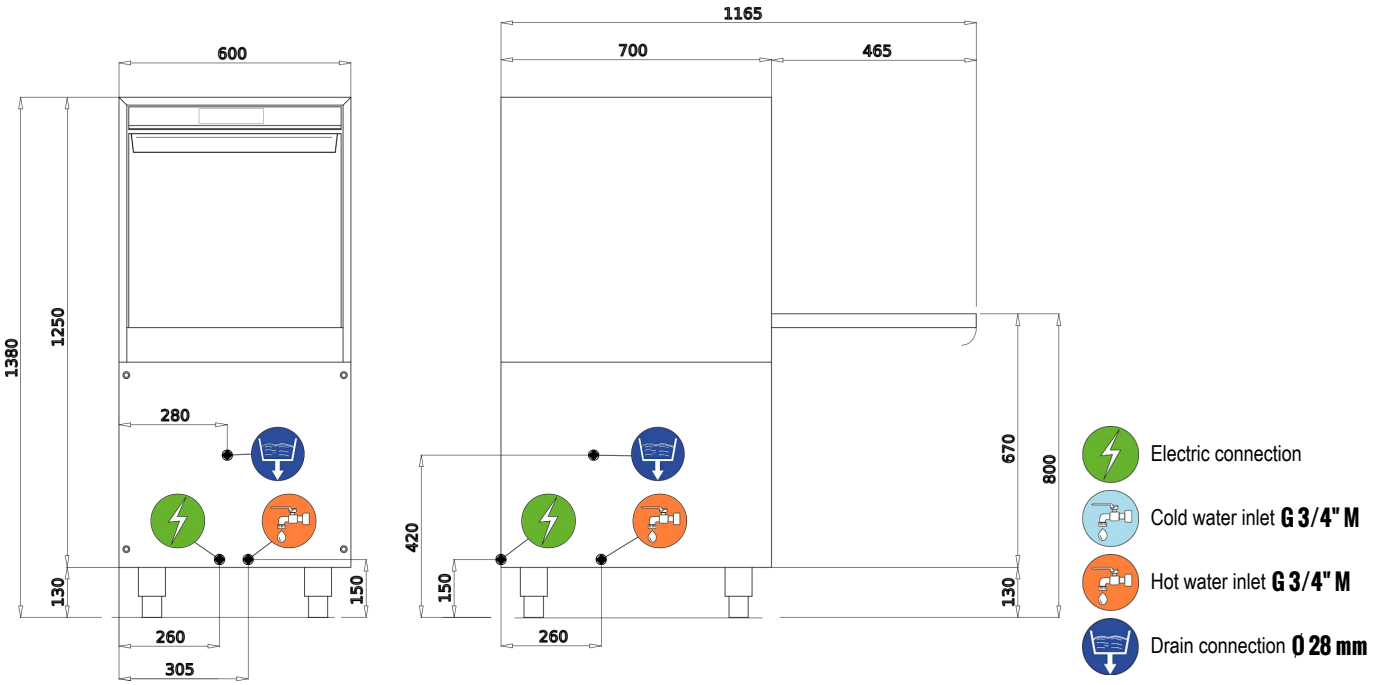

TECHNICAL FEATURES

EXTERNAL DIMENSIONS		
Width	mm	600
Depth	mm	700
Height (screwed foot)	mm	1380
Weight (standard version)	kg	85
TECHNICAL DATA		
Basket dimensions	mm	500x610
Trays support dimensions	mm	500x500
Crate dimension	mm	600x400x400
Basket maximum useful height	mm	440
Maximum level of water discharge	mm	170
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	25
Tank heating element	kW	2.7
Boiler capacity	l	15
Boiler heating element	kW	9
Wash pump power	kW	1.12
Wash pump flow rate	l/min	630
Sound pressure level	dB(A)	< 70

POWER SUPPLY DATA

Supply voltage		380-415 V 3N 50 Hz
Total installed power	kW	10.12

CYCLES

Cycle number		1	2	3	4
Cycle length	s	60	120	180	300
Cycle productivity (racks/h) - 55°C inlet water		60	30	20	12
Cycle productivity (racks/h) - 10°C inlet water		30	30	20	12
Cycle water consumption	l	2.6	2.6	2.6	2.6
Rinsing temperature setting	°C	85	85	85	85
Washing temperature setting	°C	55	55	55	55

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

ACCORDING TO THE LAW, WE RESERVE OWNERSHIP OF THIS DESIGN OR MODEL WITH A PROHIBITION ON REPRODUCING IT OR MAKING IT KNOWN TO THIRD PARTIES OR COMPETITIVE COMPANIES WITHOUT OUR WRITTEN CONSENT