
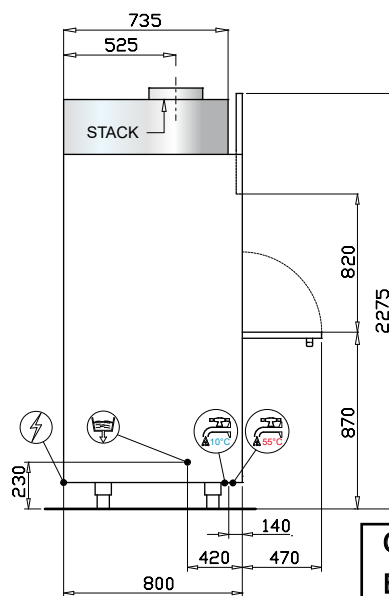


EXIT AIR TEMPERATURE :
27°C

HUMIDITY:
90%

AIR FLOW RATE:
105 m³/h

RECOVERY PER HOUR:
4,85 kWh
 (VALUES CALCULATED ON THE BASE OF THE SHORTEST CYCLE)

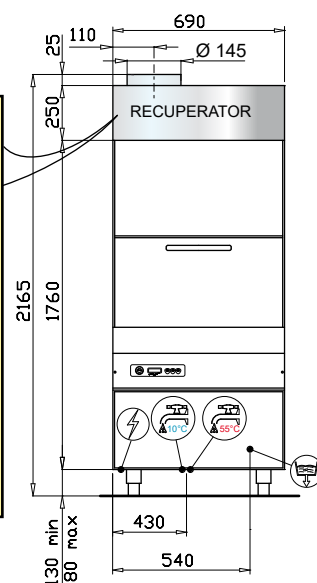

	HOT WATER CONNECTION 3/4" GAS MAX 55°C
	COLD WATER CONNECTION 3/4" GAS 10°C
	DRAIN PIPE Ø 32mm
	ELECTRICAL SUPPLY

ONLY PLUS VERSION, NEVER BUILT-IN WATER SOFTNER VERSION

TECHNICAL DATA						
EXTERNAL DIMENSIONS						
width		690 mm				
depth		800 mm				
height		2165/2275(door open) mm				
WEIGHT(basic version)		165 kg				
VOLTAGE		400V 3N 50Hz				
POWER REQUIRED		8180 W				
WATER HARDNESS		< 8 °F				
WATER CONDUCTIVITY		> 200 μS/cm				
INLET WATER PRESSURE		200-400 kPa				
CROCKERY DIMENSIONS						
size allowed		805 mm				
RACK DIMENSIONS		550X665 mm				
RACK EQUIPMENT		1XC86/A - 1XC87/B - 1XC97/A - 1XC100				
WASHING CYCLES	(sec)	1 (180)	2 (300)	3 (420)	4 (540)	5 (660)
WATER SUPPLY 55°C						
racks/h(*) ⁽¹⁾		--	--	--	--	--
WATER SUPPLY 10°C						
racks/h(*) ⁽¹⁾		13	12	8	6,5	5,5
WATER CONSUMPTION / CYCLE		4,2 l				
BOILER CAPACITY		15 l				
BOILER HEATING ELEMENT		6000 W				
RINSING TEMPERATURE (SET)		85°C				
TANK CAPACITY		50 l				
TANK HEATING ELEMENT		3000 W				
TANK TEMPERATURE (SET)		60°C				
WASHING PUMP POWER		2180 W (810 l/min***)				
RINSING PUMP POWER		250 W (150 l/min***)				
DRAIN PUMP (optional)		190 W (120 l/min***)				
ACQUSTIC PRESSURE		63.8 dB(A)				

(*) STANDARD THERMOSTOP (CAN NOT BE DISABLED)

(***) MAXIMUM FLOW RATE

- **STANDARD ENERGY SAVING** (CAN NOT BE DISABLED)

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.