


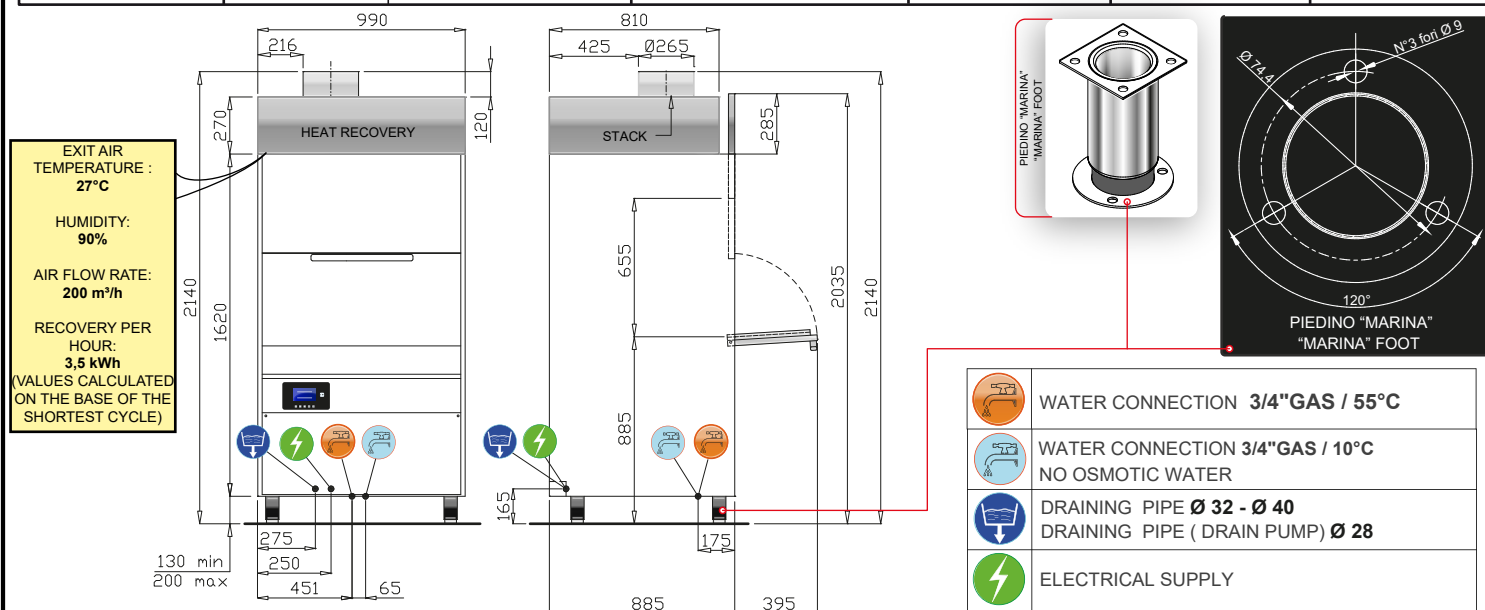

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
width		990 mm			
depth		885 mm			
height		2140 mm			
WEIGHT(basic version)		240 kg			
VOLTAGE		400V 3N 50Hz			
POWER REQUIRED		13360 W			
WATER HARDNESS		< 8 °F			
WATER CONDUCTIVITY		> 200 μS/cm			
INLET WATER PRESSURE		200–400 kPa			
CROCKERY DIMENSIONS					
size allowed		655 mm			
RACK DIMENSIONS		850X725 mm			
RACK EQUIPMENT		1XC86/A – 1XC97/A – 1X92100			
WASHING CYCLES	(min)	1 (4)	2 (7)	3 (10)	4 (13)
WATER SUPPLY 10°C					
racks/h(*) ⁽¹⁾		15	8	6	4
WATER CONSUMPTION / CYCLE		4,3 L			
BOILER CAPACITY		15 L			
BOILER HEATING ELEMENT		9000 W			
RINSING TEMPERATURE (SET)		85°C			
TANK CAPACITY		82 L			
TANK HEATING ELEMENT		6000 W			
TANK TEMPERATURE (SET)		55°C			
WASHING PUMP POWER		2180 W (810 l/min ^{***}) x 2			
RINSING PUMP POWER		250 W (150 l/min ^{***})			
DRAIN PUMP (optional)		190 W (120 l/min ^{***})			
ACOUSTIC PRESSURE		71,1 dB(A)			

(*) STANDARD THERMOSTOP

(***) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.