
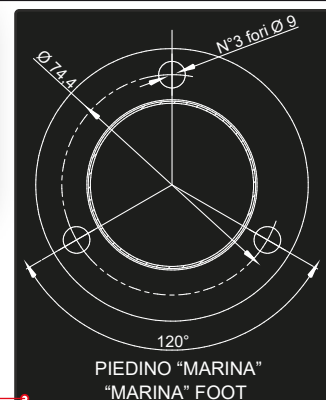



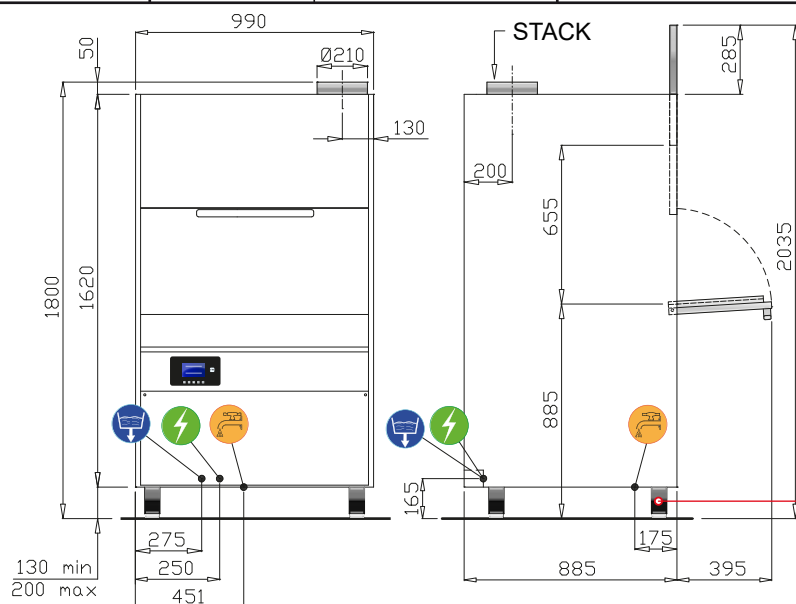

	WATER CONNECTION 3/4" GAS
	DRAINING PIPE Ø 32 - Ø 40 DRAINING PIPE (DRAIN PUMP) Ø 28
	ELECTRICAL SUPPLY

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
width		990 mm			
depth		885 mm			
height		1800 / 2035mm (door open)			
WEIGHT(basic version)		224 kg			
VOLTAGE		400V 3N 50Hz			
POWER REQUIRED		13360 W			
WATER HARDNESS		2-8 °F			
INLET WATER PRESSURE		200-400 kPa			
CROCKERY DIMENSIONS					
size allowed		655 mm			
RACK DIMENSIONS		850x725 mm			
RACK EQUIPMENT		1XC86/A - 1XC97/A - 1X92100			
WASHING CYCLES (min)		1 (3)	2 (6)	3 (9)	4 (12)
WATER SUPPLY 55°C					
racks/h(*) ⁽¹⁾		20	10	6	5
WATER SUPPLY 10°C					
racks/h(*) ⁽¹⁾		20	10	6	5
WATER CONSUMPTION / CYCLE		4,3 L			
BOILER CAPACITY		15 L			
BOILER HEATING ELEMENT		9000 W			
RINSING TEMPERATURE (SET)		85°C			
TANK CAPACITY		82 L			
TANK HEATING ELEMENT		6000 W			
TANK TEMPERATURE (SET)		55°C			
WASHING PUMP POWER		2180 W (810 l/min ^{***}) × 2			
RINSING PUMP POWER		250 W (150 l/min ^{***})			
DRAIN PUMP (optional)		190 W (120 l/min ^{***})			
ACOUSTIC PRESSURE		71,1 dB(A)			

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.