


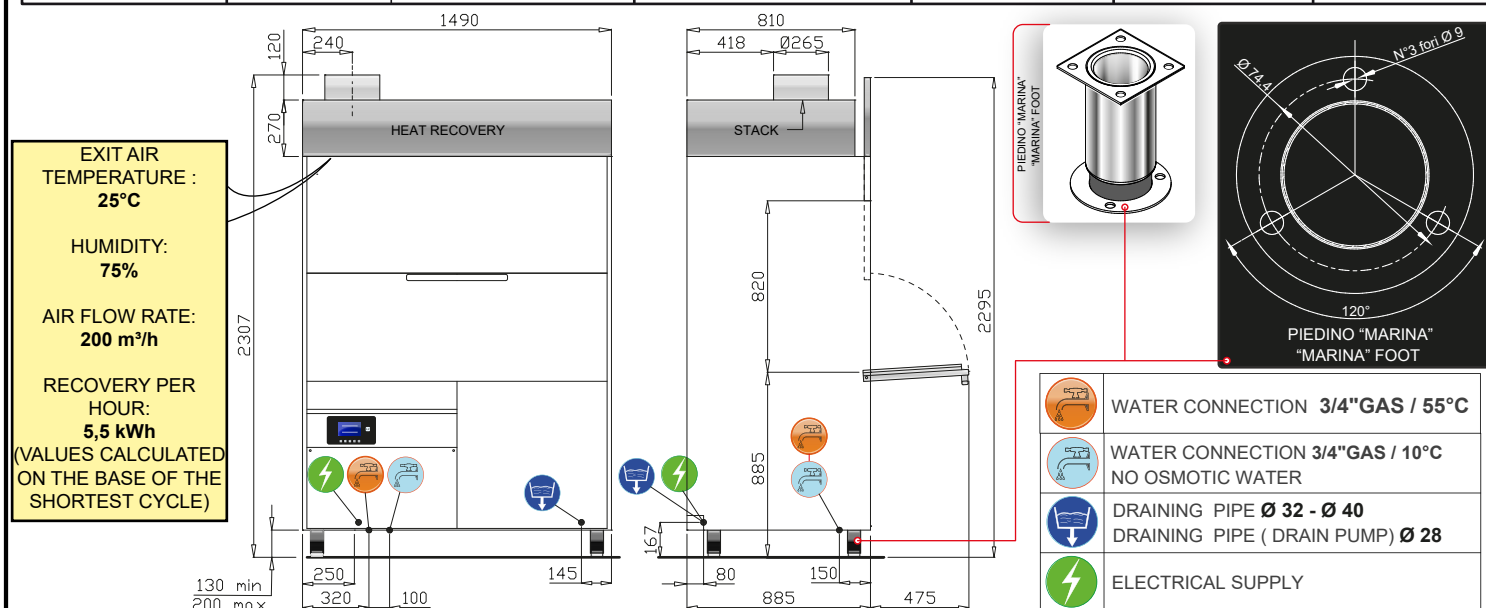

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
width		1490 mm			
depth		885 mm			
height		2307 mm			
WEIGHT(basic version)		362 kg			
VOLTAGE		400V 3N 50Hz			
POWER REQUIRED		14800 W			
WATER HARDNESS		< 8 °F			
WATER CONDUCTIVITY		> 200 μS/cm			
INLET WATER PRESSURE		200–400 kPa			
CROCKERY DIMENSIONS					
size allowed		820 mm			
RACK DIMENSIONS		1350X725 mm			
RACK EQUIPMENT		1XC86/A – 1XC97/A – 1X93600			
WASHING CYCLES	(min)	1 (4,5)	2 (7,5)	3 (10,5)	4 (13,5)
WATER SUPPLY 10°C					
racks/h(*) ⁽¹⁾		13	8	5	4
WATER CONSUMPTION / CYCLE		8,6 L			
BOILER CAPACITY		20 L			
BOILER HEATING ELEMENT		9000 W			
RINSING TEMPERATURE (SET)		85°C			
TANK CAPACITY		148 L			
TANK HEATING ELEMENT		9000 W			
TANK TEMPERATURE (SET)		55°C			
WASHING PUMP POWER		2900 W (950 l/min ^{***}) × 2			
RINSING PUMP POWER		250 W (150 l/min ^{***})× 2			
DRAIN PUMP (optional)		190 W (120 l/min ^{***})			
ACOUSTIC PRESSURE		71,9 dB(A)			

(*) STANDARD THERMOSTOP

(**) MAXIMUM FLOW RATE

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.