



K+ DSK-3

Triple Deck Steamer

Standard Features:

- AISI 304 grade stainless steel construction
- Energy efficient heat exchange system
- Insulated heat exchange chamber
- Three jet burner fitted with flame failure and auto ignition
- Overheat tank safety device fitted
- Tank auto refill and pressure release valve installed
- Three stop rotary door lock system
- Tank drain valve
- 15-month warranty
- BWT best protect water filtration kit included to achieve an optimum pH value and an excellent water mineral balance
 - XL filtration system: QLD, NSW, ACT, VIC, TAS
 - 2XL filtration system: NT, SA, WA


Specifications:

MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	WEIGHT (kg)	GAS CONSUMPTION (MJ/h)	
					NG	LPG
DSK-3	900	885 unit 940 w/rail	1950	296	150	150

Connections:

GAS (GI) (BSP)	WATER (WI)	WASTE (W) (BSP)	SUPPLY PRESSURE (kPa)	
			NG	LPG
¾" (M)	Non-return isolating valve 15mm female flared	1½" (M)	1.0	2.6

- Regulator is included in the unit
- **Must** be installed by an authorised installer
- Warranty **voided** if water filtration device is not installed

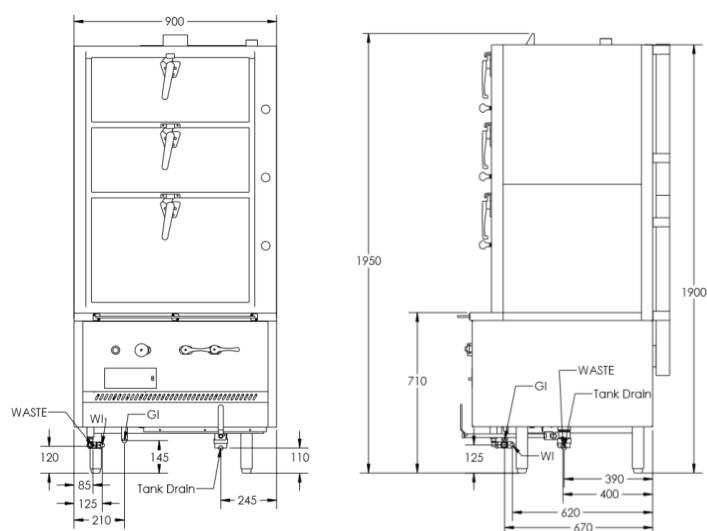

**Due to ongoing product development, product improvement and research, B+S Commercial Kitchens reserves the right to alter specification without notice.*