



BAKERY & PIZZA

BAKERY REFRIGERATED COUNTER GOLD - 800 - RETARDER



Model:

BGCT803A5RPLIXX

Retarder proofer tables with monoblock ventilated refrigeration unit sized for climate class 5 (tropicalized). Unit with easy extraction for simple and quick maintenance/replacement. Evaporator coated via cataphoresis, automatic defrost controlled by digital controller. Internal ventilation modulation. Humidity percentage always visible on the display, ensured by a humidifier controlled by the internal humidity probe. Product cycle management using the following 7 phases: 1) Cooling and stabilization; 2) Storage; 3) Product awakening; 4) Proofing phase 1; 5) Proofing phase 2; 6) Proofing phase 3; 7) Baking delay. Condensate water evaporation via anticorrosion coil in low carbon AISI 316. Doors with automatic closing and fixed open position at 100°. Seven-chamber magnetic gasket, easily removable. 7" capacitive touch display. Adjustable legs in AISI 304 stainless steel. Rails and racks in AISI 304 stainless steel – Adjustable and extractable.

TECHNICAL DATA

Temperature (°C)	(-5/+35)
Energy class	-
Gross volume (L)	593
Net chilling volume (L)	389
Net freezing volume (L)	-
Climate class	5 (+40 °C / 40% R.H.)
Refrigerant gas	R290
GWP	3
Refrigerant charge (kg)	0.089 Kg
Defrosting	ELECTRIC
Condensate evaporation	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
Humidity (%)	65-95%
Condensation	AIR
Cooling output (W)	520
Voltage	AC230V 1N+E 50Hz
Special voltages (on request)	Option
Absorbed power (W)	-
Current draw (A)	-
Noise (dB)	< 70

CONSTRUCTION DATA

Category	Counter - High performance
Intended use	Proving - This appliance is intended for use in ambient temperatures up to 40 °C.
Internal material	AISI 304 Stainless steel
External material	AISI 304 Stainless steel
Internal corners	Rounded internal corners for easy and optimal cleaning.
Insulation thickness (mm)	60
Insulation material	HFO Polyurethane (No CFC, no HCFC)
Door seal	Seven-chamber magnetic gasket, easily removable
Description of worktop	AISI 304 stainless steel thickness 10/10.
Controller	7" capacitive touch screen
Alarm	Visual and audible
NTC temperature probe	Standard
Humidifier	Standard
USB connector for downloading recorded data as per HACCP	Standard
Floor support	Adjustable feet in AISI 304 stainless steel
Floor support height (mm)	Feet: 100-150 Castors: 110 - Ø 80

SEDE OPERATIVA / PLACE OF BUSINESS

Via Fabio Filzi, 46 - 31036 Istrana (TV) – Italy
+39 0422 832679 / info@dal-mec.it


SEDE LEGALE / REGISTERED OFFICE

Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) – Italy
Partita IVA / VAT number 04207260268




BGCT803A5RPLIXX

Unless stated otherwise,
values are given in mm and are
indicative and not binding.

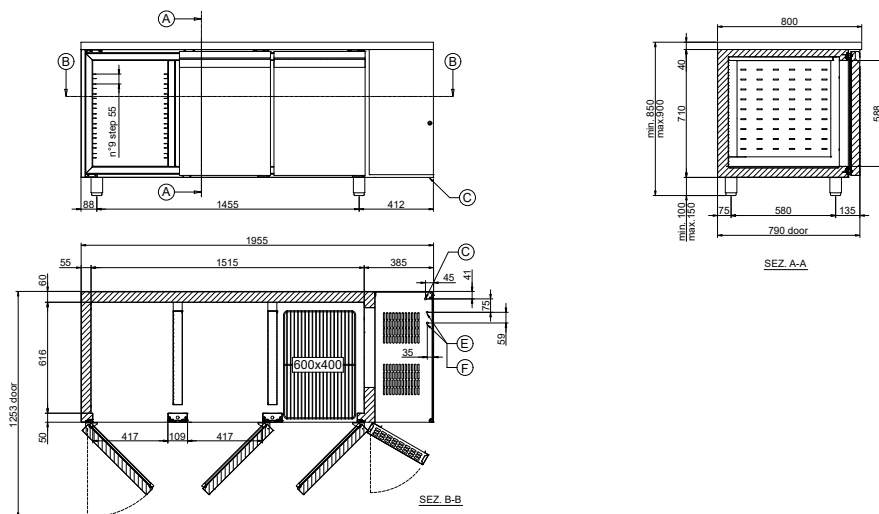

- A. Section plane
- B. Section plane
- C. Power cable outlet (length 2 m)
WARNING! While installing, have a qualified electrician connect it to an electrical panel.
- E. Water inlet (Maximum pressure 3 bar)
- F. Water outlet

Minimum clearances
WARNING! The distance from hot appliances (e.g. fryers or ovens) must be at least 500 mm.

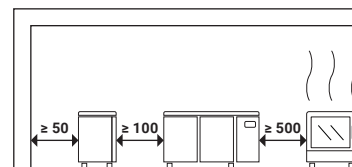

EQUIPMENT AND SETUPS

Internal setup	AISI 304 stainless steel guides and racks - Adjustable and removable.
Trays included	Not included
Pairs of guides included	N.4 "L" x door - EN 600x400
Maximum setup capacity	N.9 (step 55 mm) per door - EN 600x400
Drawers	Not available
LED bar	Not available
Wi-Fi kit	Standard
Lock with key	Not available
Air distribution duct	Standard
Openable control panel	Standard
Castors kit	Not available
Cable with Schuko or English plug	Standard (Schuko)

DIMENSIONS AND WEIGHTS

Dimensions LxDxH (mm)	1955x800x850-900
Package LxDxH (mm)	1995x830x1100
Net weight (kg)	134
Gross weight (kg)	160

SEDE OPERATIVA / PLACE OF BUSINESS

Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy
+39 0422 832679 / info@dal-mec.it

SEDE LEGALE / REGISTERED OFFICE

Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) - Italy
Partita IVA / VAT number 04207260268



BGCT803A5RPLIXX