



BAKERY & PIZZA

PIZZA REFRIGERATED SHOWCASE PLUS - 800

Model:

BV2013ANS0



Pizza refrigerated cabinets with static refrigeration motor unit designed for climate class 5 (tropicalized). Cooling coil distributed along the front, base, and rear side of the cabinet. Manual condensation water drainage via bottom pan outlet. Capacitive touch display. Wall brackets (optional)
Adjustable legs in AISI 304 stainless steel (optional). 8mm tempered glass.

TECHNICAL DATA

Temperature (°C)	(+2/+8)
Climate class	5 (+40 °C / 40% R.H.)
Refrigerant gas	R290
GWP	3
Refrigerant charge (kg)	0.068 kg
Defrosting	AIR
Condensate evaporation	Manual condensate water drainage into drain pan.
Condensation	AIR
Voltage	AC230V 1N+E 50Hz
Special voltages (on request)	Option
Absorbed power (W)	228
Current draw (A)	1,70
Noise (dB)	< 70

CONSTRUCTION DATA

Category	Counter - High performance
Intended use	Storage - This appliance is intended for use in ambient temperatures up to 40 °C.
Internal material	AISI 304 Stainless steel
External material	AISI 304 Stainless steel
Insulation thickness (mm)	0
Insulation material	HFO Polyurethane (No CFC, no HCFC)
Controller	Capacitive touch screen
NTC temperature probe	Standard
Floor support	Wall brackets (option) AISI 304 stainless steel adjustable feet (option)
Floor support height (mm)	Feet: 100-150

BV2013ANS0

SEDE OPERATIVA / PLACE OF BUSINESS


Dalmecc - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy
+39 0422 832679 / info@dal-mec.it / www.dal-mec.it



SEDE LEGALE / REGISTERED OFFICE

Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) - Italy
Partita IVA / VAT number 04207260268




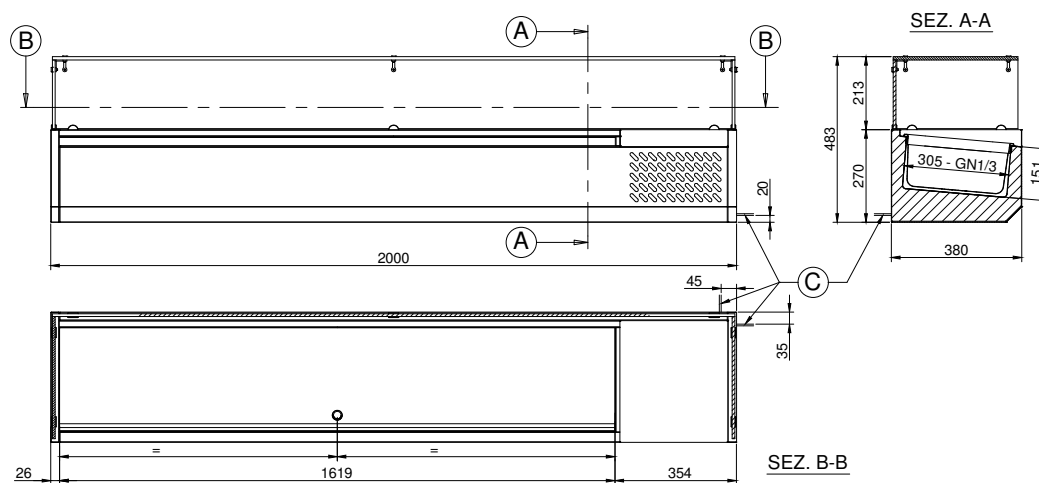

C. Power cable outlet (length 2 m)

WARNING! While installing, have a qualified electrician connect it to an electrical panel.

Minimum clearances
WARNING! The distance from
hot appliances (e.g. fryers or
ovens) must be at least 500
mm.



EQUIPMENT AND SETUPS

Internal setup	8mm tempered glass.
Containers	Not included
Cross supports for containers included	N.1 - 39x320(mm) + N.8 - 23x320(mm)
Maximum setup capacity	N.9 - GN 1/3 325x176
Wi-Fi kit	Option
Bluetooth kit	Option
Cable with Schuko or English plug	Standard (Schuko)

DIMENSIONS AND WEIGHTS

Dimensions LxDxH (mm)	2000x380x483
Package LxDxH (mm)	2100x480x570
Net weight (kg)	72
Gross weight (kg)	88