



BAKERY & PIZZA



BAKERY REFRIGERATED CABINET **GOLD - 700 - MOULDED TRAY HOLDER - RETARDER PROOFER**

Model:

BWCC070A5RPF2

Retarder proofer cabinets with monobloc ventilated refrigeration unit sized for climate class 5 (tropicalized). Unit with easy extraction for simple and quick maintenance/replacement. Evaporator coated with cataphoresis, automatic defrost managed by digital controller. Internal ventilation modulation. Humidity percentage always visible on the display, guaranteed by a humidifier controlled by the internal humidity probe. Product cycle management using the following 7 phases: 1) Cooling and stabilization; 2) Storage; 3) Product awakening; 4) Proofing phase 1; 5) Proofing phase 2; 6) Proofing phase 3; 7) Baking delay. Condensate water evaporated via AISI 316 low carbon anticorrosion coil. Non-reversible door with automatic closing and fixed open position at 100°. Seven-chamber magnetic gasket, easily removable. 7" front-mounted capacitive touch display. Adjustable legs in AISI 304 stainless steel. Moulded tray holder.

TECHNICAL DATA

Temperature (°C)	(-5/+35)
Energy class	-
Gross volume (L)	355
Net chilling volume (L)	324
Net freezing volume (L)	-
Climate class	5 (+40 °C / 40% R.H.)
Refrigerant gas	R290
GWP	3
Refrigerant charge (kg)	-
Defrosting	ELECTRIC
Condensate evaporation	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
Humidity (%)	65-95%
Condensation	AIR
Cooling output (W)	520
Voltage	AC230V 1N+E 50Hz
Special voltages (on request)	Option
Absorbed power (W)	350
Current draw (A)	2,50
Noise (dB)	< 70

CONSTRUCTION DATA

Category	Upright - High performance
Intended use	Proving - This appliance is intended for use in ambient temperatures up to 40 °C.
Internal material	AISI 304 Stainless steel
External material	AISI 304 Stainless steel
Internal corners	Rounded internal corners for easy and optimal cleaning.
Insulation thickness (mm)	80
Insulation material	HFO Polyurethane (No CFC, no HCFC)
Door seal	Seven-chamber magnetic gasket, easily removable
Door hinge	Standard left, non reversible
Controller	7" capacitive touch screen (on door front)
Alarm	Visual and audible
NTC temperature probe	Standard
Humidifier	Standard
USB connector for downloading recorded data as per HACCP	Standard
Floor support	Adjustable feet in AISI 304 stainless steel
Floor support height (mm)	Feet: 100-150 Castors: 110 - Ø 80 Plinth: 20

SEDE OPERATIVA / PLACE OF BUSINESS

Dalmec - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy
+39 0422 832679 / info@dal-mec.it / www.dal-mec.it




SEDE LEGALE / REGISTERED OFFICE

Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) - Italy
Partita IVA / VAT number 04207260268



BWCC070A5RPF2

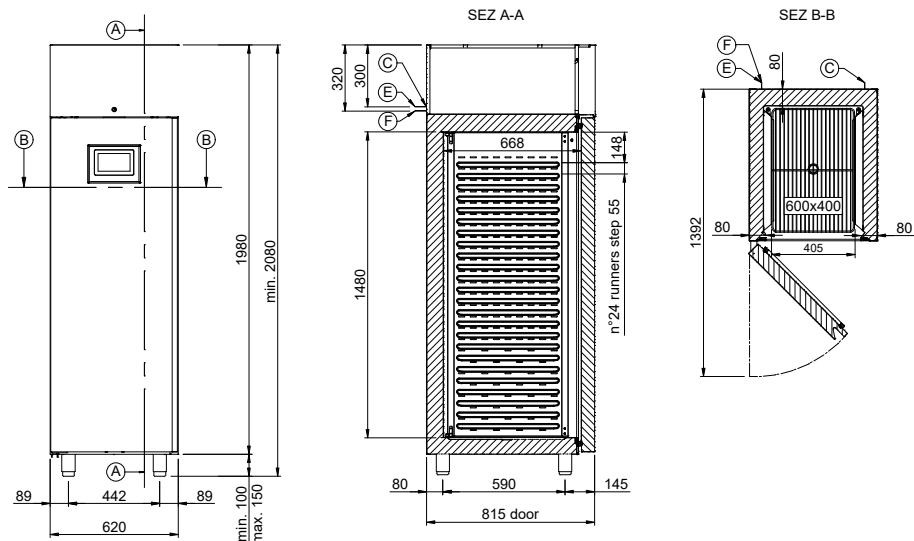

A. Section plane

B. Section plane


C. Power cable outlet (length 2 m)

WARNING! While installing, have a qualified electrician connect it to an electrical panel.

E. Water inlet

F. Water outlet

Minimum clearances
WARNING! The distance from
hot appliances (e.g. fryers or
ovens) must be at least 500
mm.

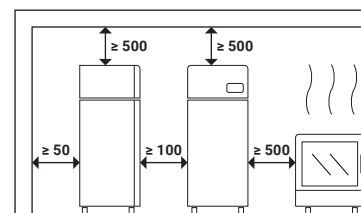

EQUIPMENT AND SETUPS

Internal setup	Moulded tray holder
Trays included	Not included
Pairs of guides included	N.24 - EN 600x400
Maximum setup capacity	N.24 (step 55 mm) - EN 600x400
LED bar	Standard
Wi-Fi kit	Standard
Lock with key	Standard
Air distribution duct	Standard
Door opening pedal	Standard
Castors kit	Not available
Cable with Schuko or English plug	Standard (Schuko)
Diamond-patterned bottom with drainage hole	Standard

DIMENSIONS AND WEIGHTS

Dimensions LxDxH (mm)	620x815x2080-2130
Package LxDxH (mm)	650x840x2195
Net weight (kg)	153
Gross weight (kg)	170

BWCC070A5RPF2

SEDE OPERATIVA / PLACE OF BUSINESS
Dalmech - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy
+39 0422 832679 / info@dal-mec.it / www.dal-mec.it

SEDE LEGALE / REGISTERED OFFICE
Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) - Italy
Partita IVA / VAT number 04207260268

