

Upright Double-Door Pastry Fridge

1400L Capacity | Adjustable 600x400 Tray Supports



2 YEAR WARRANTY

MODEL	CPCC140D2
TYPE	Upright 2 Door Pastry Fridge
TEMPERATURE (°C)	(-2/+10)
GROSS VOLUME	1405 Litres
NET CHILLING VOLUME	682 Litres
NET / GROSS WEIGHT	183 / 206kg
MAX TRAY CAPACITY	60 x (600x400) Trays at 41.4mm Pitch
EXTERNAL DIMENSIONS (MM)	1440x815x2080-2130 H
PACKAGE DIMENSIONS (MM)	1465x860x2240mm H


COOLING OUTPUT (W)	872 Watts
POWER CONSUMPTION (W)	580 Watts
VOLTAGE	230 Volts
AMPERAGE	3.3 Amps
POWER CABLE	2 Meter Length

COMPRESSOR TYPE	Ventilated Monoblock
CONDENSATE EVAPORATION	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
REFRIGERANT GAS	R290
REFRIGERANT CHARGE (kg)	-
DEFROST TYPE	Electric
HUMIDITY (%) CONTROL	N/A


ENERGY CLASS	C
CLIMATE CLASS	5 (+40°C / 40% R.H.)
ANNUAL ENERGY CONSUMPTION (AEC)	725.40 Kwh/annum
DAILY ENERGY CONSUMPTION	1.99 E24 h (kWh)
ENERGY EFFICIENCY INDEX (EEI)	41.94
GLOBAL WARMING POTENTIAL (GWP)	3

INTERNAL MATERIAL	AISI 304 Stainless Steel
EXTERNAL MATERIAL	AISI 304 Stainless Steel (back, top and bottom in galvanized sheet metal)
INTERNAL CORNERS	Rounded corners inside for easy and optimal cleaning.
INSULATION THICKNESS (MM)	60mm
INSULATION MATERIAL	HFO Polyurethane (No CFC, no HCFC)
DOOR SEAL	Easily removed, triple chamber magnetic seal.
GUIDES	AISI 304 "L" Stainless Steel Guides
CONTROLLER	Capacitive touch screen
ALARM	Visual And Audible
NOISE (DB)	<70

INCLUSIONS	10 x "L" (600 x 400) Guide Pairs (5 per Door) - LED Internal Lighting - Air distribution duct - Lock with key
PRICE	\$7,500.00

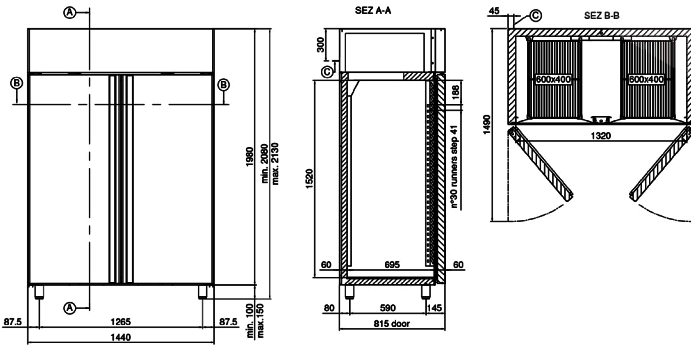

Air Distribution

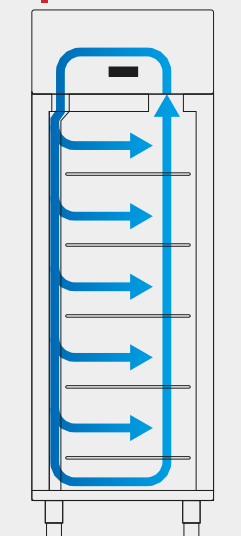

AISI 304 STAINLESS STEEL ADJUSTABLE AND REMOVABLE GUIDES AND RACKS

Accessories

MODEL	DESCRIPTION	PRICE
AM14802	Stainless steel Grid 600x400	\$140.00
AM14811	Polyethylene Grid 600x400	\$110.00
AKITRU04	4-wheel kit - H 110 mm Ø 80 mm (2 with brake, 2 without brake)	\$120.00
AKITGPA70	Pair of L-profile tray holders	\$60.00

Features

