


Upright Double-Door Pastry Freezer

1400L Capacity | Adjustable 600x400 Tray Supports



2 YEAR WARRANTY

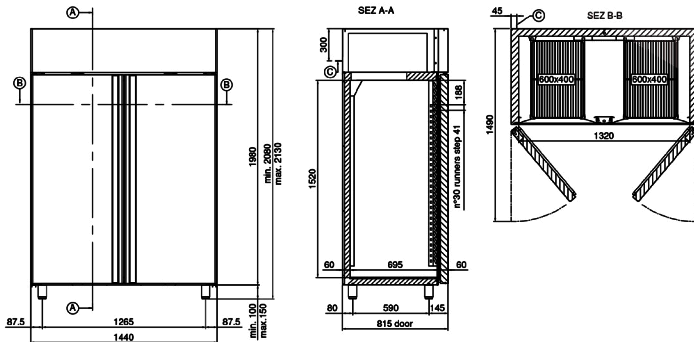

MODEL	CPCC140DB
TYPE	Upright 2 Door Pastry Freezer
TEMPERATURE (°C)	(-22/-18)
GROSS VOLUME	1405 Litres
NET CHILLING VOLUME	682 Litres
NET / GROSS WEIGHT	191 / 214kg
MAX TRAY CAPACITY	60 x (600x400) Trays at 41.4mm Pitch
EXTERNAL DIMENSIONS (MM)	1440x815x2080-2130 H
PACKAGE DIMENSIONS (MM)	1465x860x2240mm H

POWER	COOLING OUTPUT (W)	652 Watts
	POWER CONSUMPTION (W)	880 Watts
	VOLTAGE	230 Volts
	AMPERAGE	4.8 Amps
	POWER CABLE	2 Meter Length


COOLING	COMPRESSOR TYPE	Ventilated Monoblock
	CONDENSATE EVAPORATION	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
	REFRIGERANT GAS	R290
	REFRIGERANT CHARGE (kg)	-
	DEFROST TYPE	Electric
	HUMIDITY (%) CONTROL	N/A

ENERGY	ENERGY CLASS	D
	CLIMATE CLASS	5 (+40°C / 40% R.H.)
	ANNUAL ENERGY CONSUMPTION (AEC)	3020.90 Kwh/annum
	DAILY ENERGY CONSUMPTION	8.28 E24 h (kWh)
	ENERGY EFFICIENCY INDEX (EEI)	62.51
	GLOBAL WARMING POTENTIAL (GWP)	3

CONSTRUCTION	INTERNAL MATERIAL	AISI 304 Stainless Steel
	EXTERNAL MATERIAL	AISI 304 Stainless Steel (back, top and bottom in galvanized sheet metal)
	INTERNAL CORNERS	Rounded corners inside for easy and optimal cleaning.
	INSULATION THICKNESS (MM)	60mm
	INSULATION MATERIAL	HFO Polyurethane (No CFC, no HCFC)
	DOOR SEAL	Easily removed, triple chamber magnetic seal.
	GUIDES	AISI 304 “L” Stainless Steel Guides
	CONTROLLER	Capacitive touch screen
	ALARM	Visual And Audible
	NOISE (DB)	<70

INCLUSIONS	✓	10 x "L" (600 x 400) Guide Pairs (5 per Door)
✓	✓	LED Internal Lighting
✓	✓	Air distribution duct
✓	✓	Lock with key
PRICE		\$8,500.00

Air Distribution

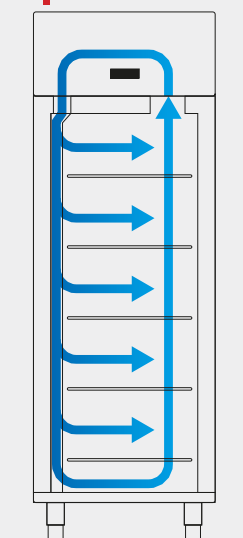

AISI 304 STAINLESS STEEL ADJUSTABLE AND REMOVABLE GUIDES AND RACKS

Accessories

MODEL	DESCRIPTION	PRICE
AM14802	Stainless steel Grid 600x400	\$ 140.00
AM14811	Polyethylene Grid 600x400	\$110.00
AKITRU04	4-wheel kit - H 110 mm Ø 80 mm (2 with brake, 2 without brake)	\$120.00
AKITGPA70	Pair of L-profile tray holders	\$60.00

Features

