



PASTRY, ICE CREAM & CHOCOLATE

CHOCOLATE REFRIGERATED COUNTER GOLD - 800



Model:

CPCT802ANCHLI

Refrigerated tables with monoblock ventilated refrigeration unit sized for climate class 5 (tropicalized). Unit with easy extraction for simple and quick maintenance/replacement. Evaporator coated via cataphoresis, automatic defrost controlled by digital controller. Condensate water evaporation via anticorrosion coil in low carbon AISI 316. Doors with automatic closing and fixed open position at 100°. Seven-chamber magnetic gasket, easily removable. 5" capacitive touch display, large digits, with energy-saving strategies. Adjustable legs in AISI 304 stainless steel. Rails and racks in AISI 304 stainless steel – Adjustable and extractable.

TECHNICAL DATA

Temperature (°C)	(+12/+18)
Energy class	A
Annual energy consumption AEC (kWh/annum)	456,10
Energy efficiency index EEI	18,58
Daily energy consumption E24 h (kWh)	1,25
Gross volume (L)	388
Net chilling volume (L)	260
Net freezing volume (L)	-
Climate class	5 (+40 °C / 40% R.H.)
Refrigerant gas	R290
GWP	3
Refrigerant charge (kg)	-
Defrosting	AIR
Condensate evaporation	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
Humidity (%)	40-55%
Condensation	AIR
Cooling output (W)	520
Voltage	AC230V 1N+E 50Hz
Special voltages (on request)	Option
Absorbed power (W)	350
Current draw (A)	2,20
Noise (dB)	< 70

CONSTRUCTION DATA

Category	Counter - High performance
Intended use	Storage - This appliance is intended for use in ambient temperatures up to 40 °C.
Internal material	AISI 304 Stainless steel
External material	AISI 304 Stainless Steel (bottom in galvanized steel)
Internal corners	Rounded internal corners for easy and optimal cleaning.
Insulation thickness (mm)	60
Insulation material	HFO Polyurethane (No CFC, no HCFC)
Door seal	Seven-chamber magnetic gasket, easily removable
Description of worktop	AISI 304 stainless steel thickness 10/10.
Controller	5" large-digit capacitive touch screen with energy saving strategies
Alarm	Visual and audible
NTC temperature probe	Standard
Humidifier	Not available
Floor support	Adjustable feet in AISI 304 stainless steel
Floor support height (mm)	Feet: 100-150 Castors: 110 - Ø 80

CPCT802ANCHLI

SEDE OPERATIVA / PLACE OF BUSINESS



Dalmecc - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy
+39 0422 832679 / info@dal-mec.it / www.dal-mec.it



SEDE LEGALE / REGISTERED OFFICE


Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) - Italy
Partita IVA / VAT number 04207260268



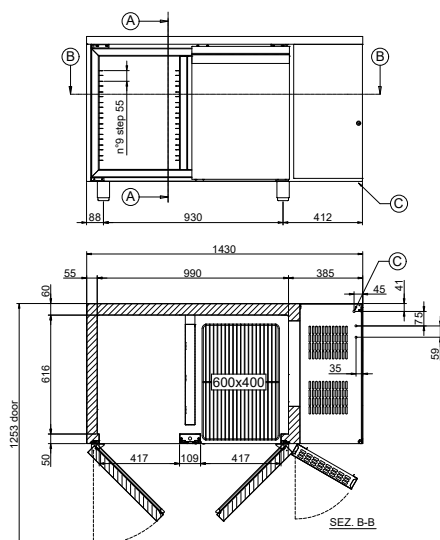

- A. Section plane**
B. Section plane
C. Power cable outlet (length 2 m)
WARNING! While installing, have a qualified electrician connect it to an electrical panel.
D. Gas pipes outlet (Ø 6 mm delivery and Ø 10 mm suction)
Ready for remote motor.

Minimum clearances
WARNING! The distance from hot appliances (e.g. fryers or ovens) must be at least 500 mm.

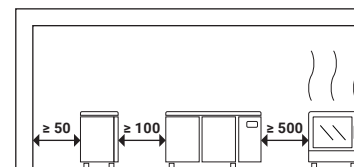

EQUIPMENT AND SETUPS

Internal setup	AISI 304 stainless steel guides and racks - Adjustable and removable.
Trays included	N.1 per door - EN 600x400 - Plastic coated
Maximum load per tray (kg)	30
Pairs of guides included	N.1 "L" per door - EN 600x400
Maximum setup capacity	N.9 (step 55 mm) per door - EN 600x400
Drawers	Not available
LED bar	Not available
Wi-Fi kit	Option
Bluetooth kit	Option
Lock with key	Not available
Air distribution duct	Standard
Front removable motor	Not available
Openable control panel	Standard
Castors kit	Option
Cable with Schuko or English plug	Standard (Schuko)

DIMENSIONS AND WEIGHTS

Dimensions LxDxH (mm)	1430x800x850-900
Package LxDxH (mm)	1470x830x1100
Net weight (kg)	105
Gross weight (kg)	126