DALMEC

DOWNLOAD
ALL TECHNICAL
DOCUMENTS

PASTRY, ICE CREAM & CHOCOLATE



PASTRY REFRIGERATED COUNTER

PLUS - 800

Model:

CPCT802D2LI

Refrigerated tables with ventilated monoblock refrigeration unit sized for climate class 5 (tropicalised). Easy-extraction unit for simple and quick maintenance/replacement. Cataphoresis-coated evaporator, automatic defrost managed by digital controller. Condensate water evaporation via anticorrosion coil in AISI 316 low-carbon stainless steel. Doors with automatic closing and fixed opening position at 100°. Seven-chamber magnetic gasket, easily removable. Capacitive touch display. Adjustable AISI 304 stainless steel feet. AISI 304 stainless steel guides and racks – adjustable and removable.

TECHNICAL DATA

Temperature (°C)	(-2/+10)
Energy class	A
Annual energy consumption AEC (kWh/annum)	584
Energy efficiency index EEI	23,79
Daily energy consumption E24 h (kWh)	1,60
Gross volume (L)	388
Net chilling volume (L)	260
Net freezing volume (L)	-
Climate class	5 (+40 °C / 40% R.H.)
Refrigerant gas	R290
GWP	3
Refrigerant charge (kg)	0.090 Kg
Defrosting	ELECTRIC
Condensate evaporation	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
Humidity (%)	-
Condensation	AIR
Cooling output (W)	520
Voltage	AC230V 1N+E 50Hz
Special voltages (on request)	Option
Absorbed power (W)	350
Current draw (A)	2,10
Noise (dB)	< 70

CONSTRUCTION DATA


Category	Counter - High performance
Intended use	Storage - This appliance is intended for use in ambient temperatures up to 40 °C.
Internal material	AISI 304 Stainless steel
External material	AISI 304 Stainless Steel (bottom in galvanized steel)
Internal corners	Rounded internal corners for easy and optimal cleaning.
Insulation thickness (mm)	60
Insulation material	HFO Polyurethane (No CFC, no HCFC)
Door seal	Seven-chamber magnetic gasket, easily removable
Description of worktop	AISI 304 stainless steel thickness 10/10.
Controller	Capacitive touch screen
Alarm	Visual and audible
NTC temperature probe	Standard
Floor support	Adjustable feet in AISI 304 stainless steel
Floor support height (mm)	Feet: 100-150 Castors: 110 - Ø 80


SEDE OPERATIVA / PLACE OF BUSINESS
Dalmec - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) – Italy
+39 0422 832679 / **info@dal-mec.it** / **www.dal-mec.it**

SEDE LEGALE / REGISTERED OFFICE
Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Vedelago (TV) – Italy
Partita IVA / VAT number 04207260268

Il costruttore può apportare modifiche ai prodotti senza preavviso. / The manufacturer reserves the right to modify any product without prior notice. / Veranderungen an den produkten konnen vom hersteller ohne vorankundigung vorgenommen werden. / Des modifications aux produits peuvent etre apportees sans preavis du constructeur. / El fabricante se reserva el derecho de modificar cualquier producto sin previo aviso.


Unless stated otherwise, values are given in mm and are indicative and not binding.

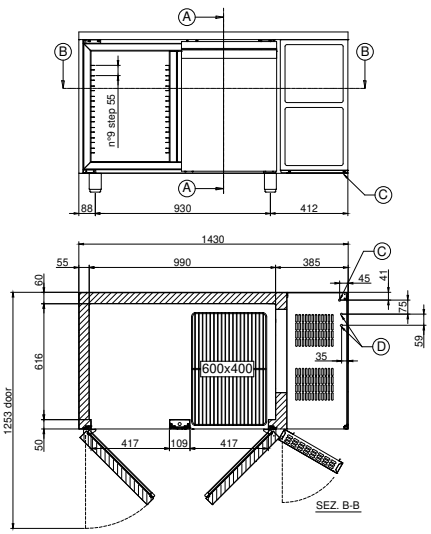



A. Section plane
B. Section plane
C. Power cable outlet (length 2 m)
WARNING! While installing, have a qualified electrician connect it to an electrical panel.
D. Gas pipes outlet (Ø 6 mm delivery and Ø 10 mm suction)
Ready for remote motor.

Minimum clearances
WARNING! The distance from hot appliances (e.g. fryers or ovens) must be at least 500 mm.

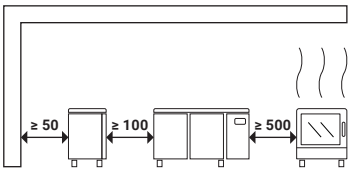

EQUIPMENT AND SETUPS

Internal setup	AISI 304 stainless steel guides and racks - Adjustable and removable.
Trays included	N.1 per door - EN 600x400 - Plastic coated
Maximum load per tray (kg)	30
Pairs of guides included	N.1 "L" per door - EN 600x400
Maximum setup capacity	N.9 (step 55 mm) per door - EN 600x400
Drawers	Option (Interchangeability between doors and drawers)
LED bar	Not available
Wi-Fi kit	Option
Bluetooth kit	Option
Lock with key	Not available
Air distribution duct	Not available
Front removable motor	Option
Openable control panel	Option
Castors kit	Option
Cable with Schuko or English plug	Standard (Schuko)

DIMENSIONS AND WEIGHTS

Dimensions LxDxH (mm)	1430x800x850-900
Package LxDxH (mm)	1470x830x1100
Net weight (kg)	105
Gross weight (kg)	126

SEDE OPERATIVA / PLACE OF BUSINESS
Dalmec - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) – Italy
+39 0422 832679 / **info@dal-mec.it** / **www.dal-mec.it**

SEDE LEGALE / REGISTERED OFFICE
Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Vedelago (TV) – Italy
Partita IVA / VAT number 04207260268

CPCT802D2LI

Il costruttore può apportare modifiche ai prodotti senza preavviso. / The manufacturer reserves the right to modify any product without prior notice. / Veranderungen an den produkten konnen vom hersteller ohne vorankundigung vorgenommen werden. / Des modifications aux produits peuvent etre apportees sans preavis du constructeur. / El fabricante se reserva el derecho de modificar cualquier producto sin previo aviso.