



## PASTRY, ICE CREAM & CHOCOLATE



### ICE CREAM REFRIGERATED CABINET GOLD - 900

Model:

**GGCC090ABPR**

Refrigerated cabinets with monoblock unit and ventilated refrigeration system, designed for climate class 5 (tropicalised). Easily removable refrigeration unit for quick and simple maintenance/replacement. Cataphoresis-coated evaporator, automatic defrost managed by a digital controller. Condensate water evaporation through an anti-corrosion AISI 316 low carbon stainless steel coil. Reversible door with self-closing system and fixed opening position at 100°. Seven-chamber magnetic gasket, easily removable. Flush-mounted capacitive LCD display. Adjustable AISI 304 stainless steel feet. AISI 304 stainless steel tray runners and uprights – Adjustable and removable.

#### TECHNICAL DATA

|                                           |                                                                                      |
|-------------------------------------------|--------------------------------------------------------------------------------------|
| Temperature (°C)                          | (-18/-13)                                                                            |
| Energy class                              | D                                                                                    |
| Annual energy consumption AEC (kWh/annum) | 2824                                                                                 |
| Energy efficiency index EEI               | 57,61                                                                                |
| Daily energy consumption E24 h (kWh)      | 7,74                                                                                 |
| Gross volume (L)                          | 851                                                                                  |
| Net chilling volume (L)                   | -                                                                                    |
| Net freezing volume (L)                   | 696                                                                                  |
| Climate class                             | 5 (+40 °C / 40% R.H.)                                                                |
| Refrigerant gas                           | R290                                                                                 |
| GWP                                       | 3                                                                                    |
| Refrigerant charge (kg)                   | 0.100 Kg                                                                             |
| Defrosting                                | HOT GAS                                                                              |
| Condensate evaporation                    | Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316. |
| Condensation                              | AIR                                                                                  |
| Cooling output (W)                        | 568                                                                                  |
| Voltage                                   | AC230V 1N+E 50Hz                                                                     |
| Special voltages (on request)             | Option                                                                               |
| Absorbed power (W)                        | 860                                                                                  |
| Current draw (A)                          | 4,70                                                                                 |
| Noise (dB)                                | < 70                                                                                 |

#### CONSTRUCTION DATA

|                           |                                                                                   |
|---------------------------|-----------------------------------------------------------------------------------|
| Category                  | Upright - High performance                                                        |
| Intended use              | Storage - This appliance is intended for use in ambient temperatures up to 40 °C. |
| Internal material         | AISI 304 Stainless steel                                                          |
| External material         | AISI 304 Stainless steel                                                          |
| Internal corners          | Rounded internal corners for easy and optimal cleaning.                           |
| Insulation thickness (mm) | 80                                                                                |
| Insulation material       | HFO Polyurethane (No CFC, no HCFC)                                                |
| Door seal                 | Seven-chamber magnetic gasket, easily removable                                   |
| Door hinge                | Standard left, reversible                                                         |
| Controller                | Flush-mounted capacitive LCD display                                              |
| Alarm                     | Visual and audible                                                                |
| NTC temperature probe     | Standard                                                                          |
| Floor support             | Adjustable feet in AISI 304 stainless steel                                       |
| Floor support height (mm) | Feet: 100-150<br>Castors: 160 - Ø 125<br>Plinth: 20                               |

GGCC090ABPR

#### SEDE OPERATIVA / PLACE OF BUSINESS


Dalmecc - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy  
+39 0422 832679 / info@dal-mec.it / www.dal-mec.it



#### SEDE LEGALE / REGISTERED OFFICE

Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) - Italy  
Partita IVA / VAT number 04207260268



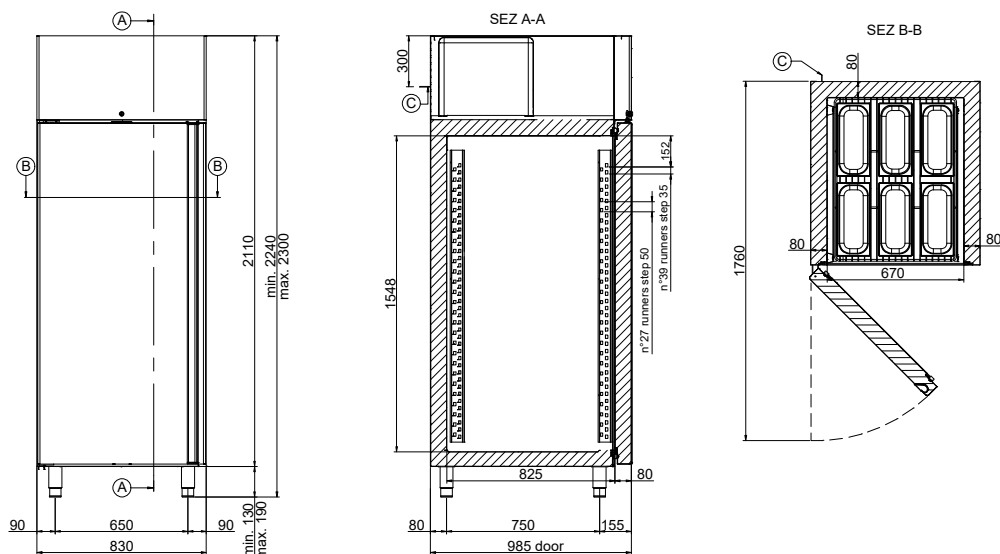


A. Section plane

B. Section plane

C. Power cable outlet (length 2 m)

**WARNING!** While installing, have a qualified electrician connect it to an electrical panel.

**Minimum clearances**  
**WARNING!** The distance from  
hot appliances (e.g. fryers or  
ovens) must be at least 500  
mm.

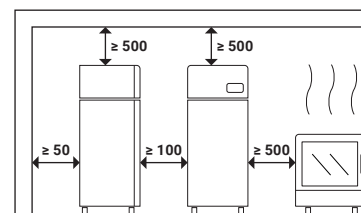

## EQUIPMENT AND SETUPS

|                                                    |                                                                                |
|----------------------------------------------------|--------------------------------------------------------------------------------|
| <b>Internal setup</b>                              | AISI 304 stainless steel tray runners and uprights – Adjustable and removable. |
| <b>Trays included</b>                              | N.10 - EN 600x800 - Plastic coated                                             |
| <b>Maximum load per tray (kg)</b>                  | 73                                                                             |
| <b>Pairs of guides included</b>                    | N.10 "C" - EN 600x800                                                          |
| <b>Maximum setup capacity</b>                      | 60 Pans H120                                                                   |
| <b>LED bar</b>                                     | Standard                                                                       |
| <b>Wi-Fi kit</b>                                   | Standard                                                                       |
| <b>Bluetooth kit</b>                               | Option                                                                         |
| <b>Lock with key</b>                               | Standard                                                                       |
| <b>Air distribution duct</b>                       | Standard                                                                       |
| <b>Door opening pedal</b>                          | Standard                                                                       |
| <b>Castors kit</b>                                 | Option                                                                         |
| <b>Cable with Schuko or English plug</b>           | Standard (Schuko)                                                              |
| <b>Diamond-patterned bottom with drainage hole</b> | Standard                                                                       |

## DIMENSIONS AND WEIGHTS

|                              |                   |
|------------------------------|-------------------|
| <b>Dimensions LxDxH (mm)</b> | 830x985x2240-2300 |
| <b>Package LxDxH (mm)</b>    | 860x1030x2430     |
| <b>Net weight (kg)</b>       | 188               |
| <b>Gross weight (kg)</b>     | 210               |