


FOOD SERVICE

**REFRIGERATED CABINET
PLUS - ROLL-IN 2000**

Model:

PPCC200D2

Refrigerated cabinets with ventilated monobloc unit designed for climate class 4. Easy-extraction unit for simple and quick maintenance/replacement. Cataphoresis-coated evaporator, automatic defrost managed by digital controller. Condensate water evaporation via low-carbon AISI 316 anticorrosion coil. Non-reversible door with automatic closing and fixed opening position at 100°. Removable magnetic gasket. Capacitive touch display. Base in AISI 304 stainless steel. Tray cart (not included).

TECHNICAL DATA

Temperature (°C)	(-2/+10)
Energy class	-
Annual energy consumption AEC (kWh/annum)	-
Energy efficiency index EEI	-
Daily energy consumption E24 h (kWh)	-
Gross volume (L)	1489
Net chilling volume (L)	-
Net freezing volume (L)	-
Climate class	4 (+30 °C / 55% R.H.)
Refrigerant gas	R290
GWP	3
Refrigerant charge (kg)	0.109 Kg
Defrosting	ELECTRIC
Condensate evaporation	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
Humidity (%)	-
Condensation	AIR
Cooling output (W)	872
Voltage	AC230V 1N+E 50Hz
Special voltages (on request)	Option
Absorbed power (W)	580
Current draw (A)	-
Noise (dB)	< 70

CONSTRUCTION DATA

Category	Upright - High performance
Intended use	Storage - This appliance is intended for use in ambient temperatures up to 40 °C.
Internal material	AISI 304 Stainless steel
External material	AISI 304 Stainless steel
Internal corners	Rounded internal corners for easy and optimal cleaning.
Insulation thickness (mm)	70
Insulation material	HFO Polyurethane (No CFC, no HCFC)
Door seal	Easily removed magnetic seal.
Door hinge	Standard left, non reversible
Controller	Capacitive touch screen
Alarm	Visual and audible
NTC temperature probe	Standard
Floor support	AISI 304 stainless steel base


SEDE OPERATIVA / PLACE OF BUSINESS

Dalmecc - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy
+39 0422 832679 / info@dal-mec.it / www.dal-mec.it


SEDE LEGALE / REGISTERED OFFICE

Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) - Italy
Partita IVA / VAT number 04207260268


PPCC200D2

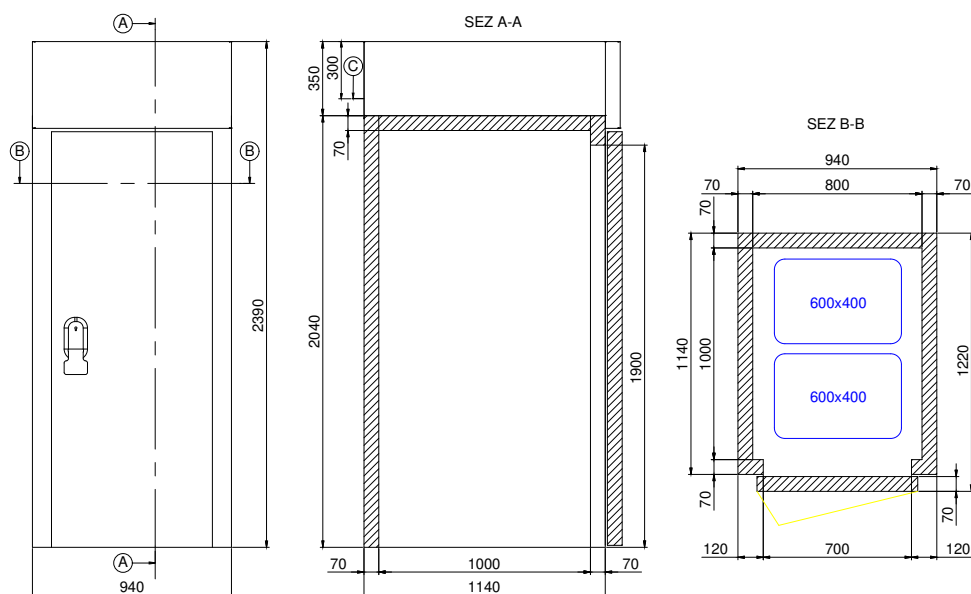


A. Section plane

B. Section plane

C. Power cable outlet (length 2 m)

WARNING! While installing, have a qualified electrician connect it to an electrical panel.

Minimum clearances
WARNING! The distance from
hot appliances (e.g. fryers or
ovens) must be at least 500
mm.

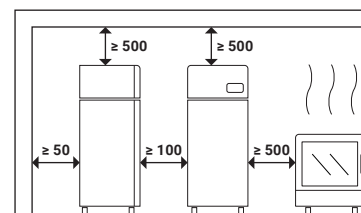

EQUIPMENT AND SETUPS

Internal setup	Gastronorm trolley (Not included).
Maximum setup capacity	N.1 - EN 600x800
Light under control panel	Not available
Wi-Fi kit	Option
Bluetooth kit	Option
Lock with key	Standard
Air distribution duct	Not available
Cable with Schuko or English plug	Standard (Schuko)

DIMENSIONS AND WEIGHTS

Dimensions LxDxH (mm)	940x1140x2390
Package LxDxH (mm)	2300x1100x1100
Net weight (kg)	215
Gross weight (kg)	237