


FOOD SERVICE

REFRIGERATED COUNTER
SNACK - 800 - FOAMED COVER

Model:

PPCS804ANXTCF

Snack tables with monobloc ventilated refrigeration unit, sized for climate class 5 (tropicalized). Unit easily extractable for simple and quick maintenance/replacement. Evaporator painted by cataphoresis, automatic defrost managed by digital controller. Condensate water evaporation via AISI 316 low-carbon anticorrosion coil. Doors with automatic closing and fixed 100° opening position. Seven-chamber magnetic gasket, easily removable. Capacitive touch display. Adjustable AISI 304 stainless steel feet. Guides and racks in AISI 304 stainless steel – adjustable and extractable.

TECHNICAL DATA

Temperature (°C)	(+2/+10)
Energy class	-
Annual energy consumption AEC (kWh/annum)	-
Energy efficiency index EEI	-
Daily energy consumption E24 h (kWh)	-
Gross volume (L)	798
Net chilling volume (L)	519
Net freezing volume (L)	-
Climate class	-
Refrigerant gas	R290
GWP	3
Refrigerant charge (kg)	-
Defrosting	HOT GAS
Condensate evaporation	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
Condensation	AIR
Cooling output (W)	872
Voltage	AC230V 1N+E 50Hz
Special voltages (on request)	Option
Absorbed power (W)	679
Current draw (A)	5,10
Noise (dB)	< 70

CONSTRUCTION DATA


Category	Counter - High performance
Intended use	Storage - This appliance is intended for use in ambient temperatures up to 40 °C.
Internal material	AISI 304 Stainless steel
External material	AISI 304 Stainless Steel (bottom in galvanized steel)
Internal corners	Rounded internal corners for easy and optimal cleaning.
Insulation thickness (mm)	60
Insulation material	HFO Polyurethane (No CFC, no HCFC)
Door seal	Seven-chamber magnetic gasket, easily removable
Description of worktop	AISI 304 stainless steel thickness 10/10 with rounded corners at the base of the container wells. With stainless steel lid.
Controller	Capacitive touch screen
Alarm	Visual and audible
NTC temperature probe	Standard
Floor support	Adjustable feet in AISI 304 stainless steel
Floor support height (mm)	Feet: 100-150 Castors: 110 - Ø 80

PPCS804ANXTCF
SEDE OPERATIVA / PLACE OF BUSINESS

 Dalmecc - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy
 +39 0422 832679 / info@dal-mec.it / www.dal-mec.it


SEDE LEGALE / REGISTERED OFFICE

 Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) - Italy
 Partita IVA / VAT number 04207260268

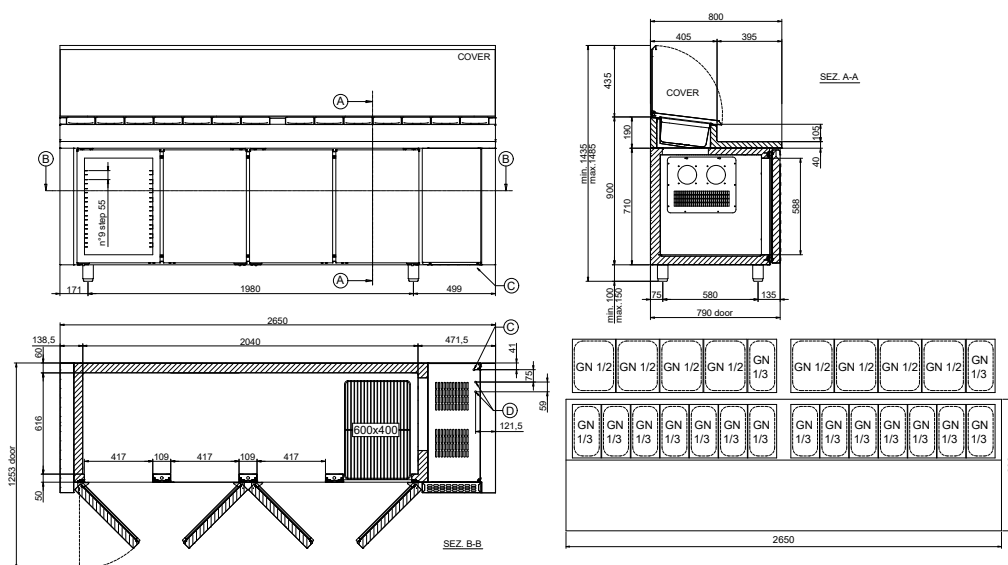- A. Section plane
- B. Section plane
- C. Power cable outlet (length 2 m)
WARNING! While installing, have a qualified electrician connect it to an electrical panel.
- D. Gas pipes outlet (Ø 6 mm delivery and Ø 10 mm suction)
Ready for remote motor.

Minimum clearances
WARNING! The distance from
hot appliances (e.g. fryers or
ovens) must be at least 500
mm.

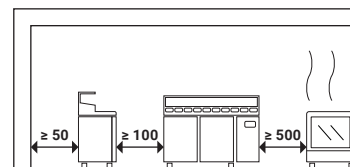

PPCS804ANXTCF

SEDE OPERATIVA / PLACE OF BUSINESS
 Dalmec - Refrigeration - Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy
+39 0422 832679 / info@dal-mec.it / www.dal-mec.it

SEDE LEGALE / REGISTERED OFFICE
 Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Veduggio (TV) - Italy
 Partita IVA / VAT number 04207260268

