Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 90 - 400 mm Closed Work top, 1 Side

ITEM #

MODEL #

NAME #

SIS #

AIA #



589156 (MCNABADOOO) Closed Work Top, one-side operated

Short Form Specification

Item No.

Closed work top, 400 mm wide, constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.
IPX5 water resistant certification.
Configuration: One-side operated top. The base needs to be supplied by the factory. Please include appropriate base.

APPROVAL:

Main Features

- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.


Optional Accessories

• Connecting rail kit, 900mm	PNC 912502	❑
• Portioning shelf, 400mm width	PNC 912522	❑
• Portioning shelf, 400mm width	PNC 912552	❑
• Folding shelf, 300x900mm	PNC 912581	❑
• Folding shelf, 400x900mm	PNC 912582	❑
• Fixed side shelf, 200x900mm	PNC 912589	❑
• Fixed side shelf, 300x900mm	PNC 912590	❑
• Fixed side shelf, 400x900mm	PNC 912591	❑
• Connecting rail kit: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)	PNC 912975	❑
• Connecting rail kit: modular 80 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	PNC 912976	❑
• Endrail kit, flush-fitting, left	PNC 913111	❑
• Endrail kit, flush-fitting, right	PNC 913112	❑
• Endrail kit (12.5mm) for thermaline 90 units, left	PNC 913202	❑
• Endrail kit (12.5mm) for thermaline 90 units, right	PNC 913203	❑
• T-connection rail for back-to-back installations without backsplash	PNC 913227	❑
• Insert profile d=900	PNC 913232	❑
• Endrail kit, (12.5mm), for back-to-back installation, left	PNC 913251	❑
• Endrail kit, (12.5mm), for back-to-back installation, right	PNC 913252	❑
• Endrail kit, flush-fitting, for back-to-back installation, left	PNC 913255	❑
• Endrail kit, flush-fitting, for back-to-back installation, right	PNC 913256	❑

Electrolux PROFESSIONAL

Modular Cooking Range Line
thermaline 90 - 400 mm Closed Work top, 1 Side

Modular Cooking Range Line thermaline 90 - 400 mm Closed Work top, 1 Side

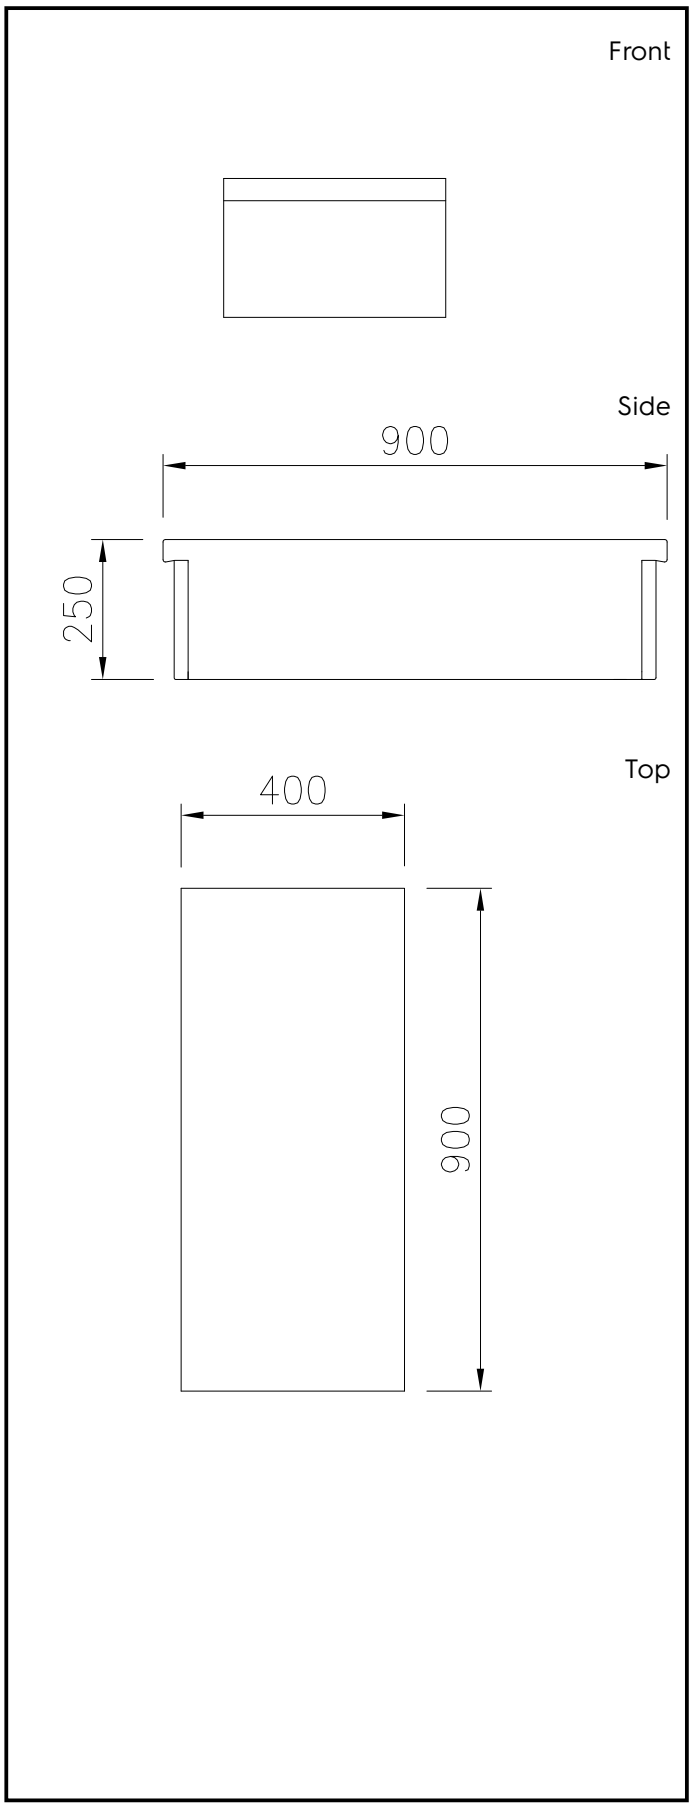

Key Information:

External dimensions, Width:	
589156 (MCNABADOOO)	400 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	250 mm
Net weight:	21 kg

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2022.12.12