



Client _____ Quantity _____
Project _____ Position _____

Smart 1400 lt cabinet

Model: A140/2NE

Cod: A12140100201

Technical data

Gross capacity:	1356 lt
Temperature range:	0°+10°C
Refrigerant unit:	Plug-In
Energetic class:	B
Energy efficiency index:	30,9
Annual consumption:	644 kW/h annum
24h consumption:	1,764 kW/h/24h
Climate class:	5
Cooling gas:	R290
Defrost:	Off cycle automatic
Valve:	Supplied standard with solenoid
Dimensions:	1480×815×2085 mm
Packing dimensions:	1575×930×2250 mm
Gross weight:	220 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	260 W
Absorbed Current:	1,2 A
Cooling capacity:	533 W*
*:	Evap. -10°C Cond. +55°C

Features

Standard equipment:	6 slides for GN2/1 shelves, 6 plastic coated GN2/1 shelves, lock with key
Control:	Electronic, display flush with the panel
Doors:	1 door, self-closing with a 105° stop, right hinged
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	75 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/ colaminated steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	In PVC
Racks and slides:	Stainless steel AISI 304
Feets:	Stainless steel AISI 304, adjustable h 100-150 mm
Cosmo:	Ready for connection to Cosmo Hub

Accessories and variants


Power supply frequency 60Hz
Other special voltage
Half doors (4 doors) Smart
Frame for fixed masonry plinth
Foot pedal kit
4 Swivel and brake castors h 128 mm
2 doors LED lighting
Stainless steel shelf GN2/1
Plastic coated shelf GN2/1
Pair of type C slides 605 mm
Intermediate shelf connection
Serial interface, RS485 cable
Cosmo connection kit

COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Smart cabinets to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of abnormal functioning.

*The installation requires a kit for the replacement of the racks

Technical draw

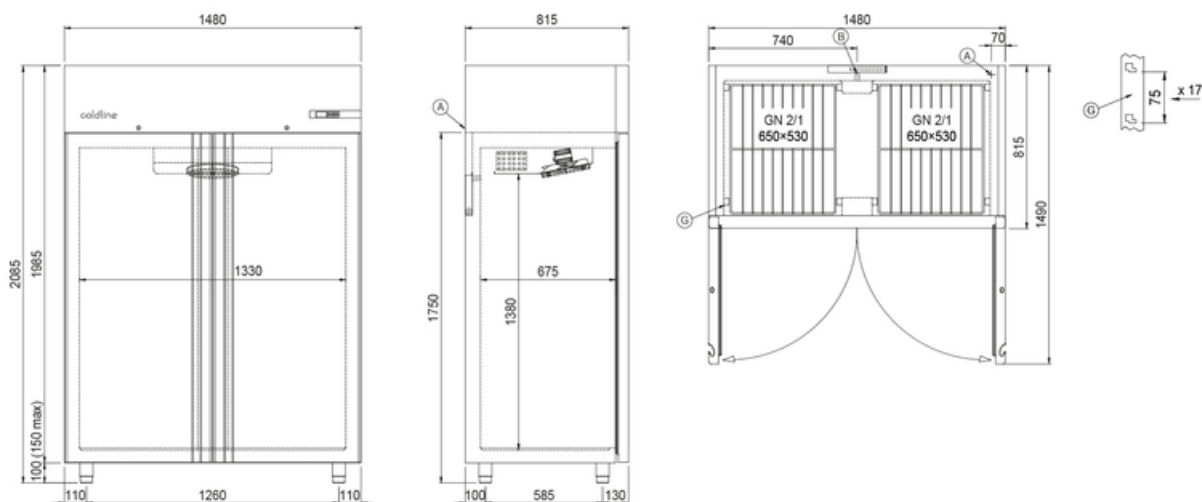

A: Power supply cable outlet

D: Airflow conveyor

G: Racks pitch