

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

**Modi Active Blast Chiller**

**Model:** W10A

**Cod:** W11106000001



**Technical data**

<b>Top:</b>	4 cm thickness
<b>Gross capacity:</b>	367 lt
<b>Temperature range:</b>	-40°+65°C
<b>Ventilation range:</b>	25% - 100%
<b>Humidifier:</b>	Not available
<b>Refrigerant unit:</b>	Plug-In
<b>Yield +90 / +3:</b>	50 Kg
<b>Yield +90 / -18:</b>	40 Kg
<b>Climate class:</b>	5
<b>Cooling gas:</b>	R452A
<b>Defrost:</b>	Hot gas
<b>Valve:</b>	Electronic expansion valve
<b>Dimensions:</b>	780×800×1563 mm
<b>Packing dimensions:</b>	875×915×1600 mm
<b>Gross weight:</b>	190 Kg
<b>Voltage:</b>	400-415 V - 50-60 Hz
<b>Total rate:</b>	5120 W
<b>Absorbed Current:</b>	12,74 A
<b>Cooling capacity:</b>	5440 W*
<b>*:</b>	Evap. -10°C Cond. +45°C

**Features**

<b>Functions:</b>	Blast chilling, shock freezing, thawing, proving, holding, desiccation, chocolate, manual cycle
<b>Standard equipment:</b>	10 slides GN1/1, EN60x40
<b>Control:</b>	4,3" touch screen display with USB port
<b>Doors:</b>	Cushioned, with anti-odor system
<b>Door gasket:</b>	Magnetic, triple chamber and easily replaceable
<b>Core probe:</b>	Needle probe with 1 reading point, quick-release and easily replaceable
<b>Insulation:</b>	60 mm thickness - CFC/HCFC free
<b>Exterior/interior finishing:</b>	Exterior and interior AISI 304 stainless steel.
<b>Inner corners:</b>	Rounded for easy cleaning and ensuring maximum hygiene
<b>Handle:</b>	Stainless steel AISI 304, 2 mm thick
<b>Racks and slides:</b>	Stainless steel AISI 304, quick release
<b>Feets:</b>	Stainless steel AISI 304, adjustable h 100-150 mm
<b>Cosmo:</b>	Wi-Fi remote control system

**Accessories and variants**


- \_\_\_\_\_RAL customisable colouring
- \_\_\_\_\_Sonda al cuore a 3 punti di lettura
- \_\_\_\_\_Sonda al cuore riscaldata a 1 punto di lettura
- \_\_\_\_\_Inversione apertura porta
- \_\_\_\_\_Single-phase 50Hz power supply or 60Hz
- \_\_\_\_\_Three phase 50Hz power supply or 60Hz
- \_\_\_\_\_Other special voltage
- \_\_\_\_\_Lowered foot h 55/70 mm
- \_\_\_\_\_4 Swivel and brake castors h 128 mm
- \_\_\_\_\_Stainless steel shelf GN1/1
- \_\_\_\_\_Plastic coated shelf GN1/1
- \_\_\_\_\_Stainless steel shelf EN60x40
- \_\_\_\_\_Plastic coated shelf EN60x40
- \_\_\_\_\_Pair of type L slides 398 mm GN-EN
- \_\_\_\_\_Sterilizing UV lamp (U version)

**COSMO - wi-fi control**

Cosmo is the wi-fi technology that allow to connect, update and monitor with a smartphone the MODI blast chiller. MODI is also a Cosmo hub and allow remote supervision of the Coldline devices connected to it.

\*The installation requires a kit for the replacement of the racks

**Technical draw**

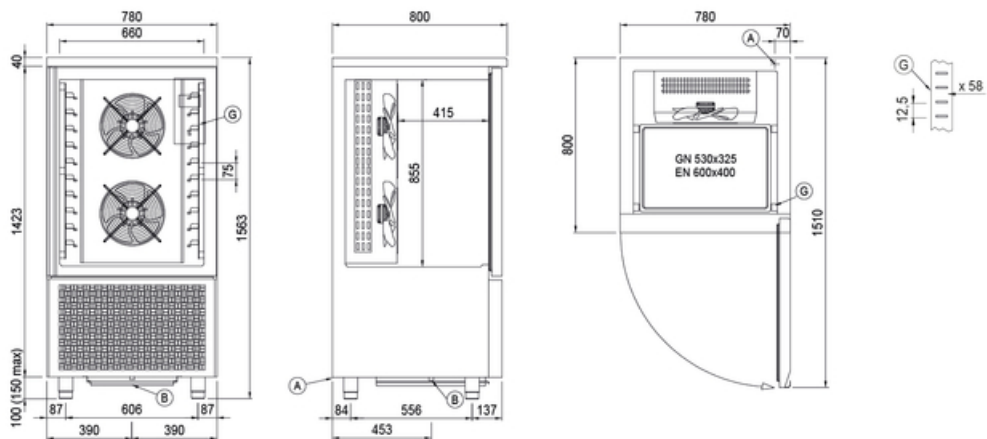

**A:** Power supply cable outlet

**B:** Condensation water drain

**G:** Racks pitch

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.