












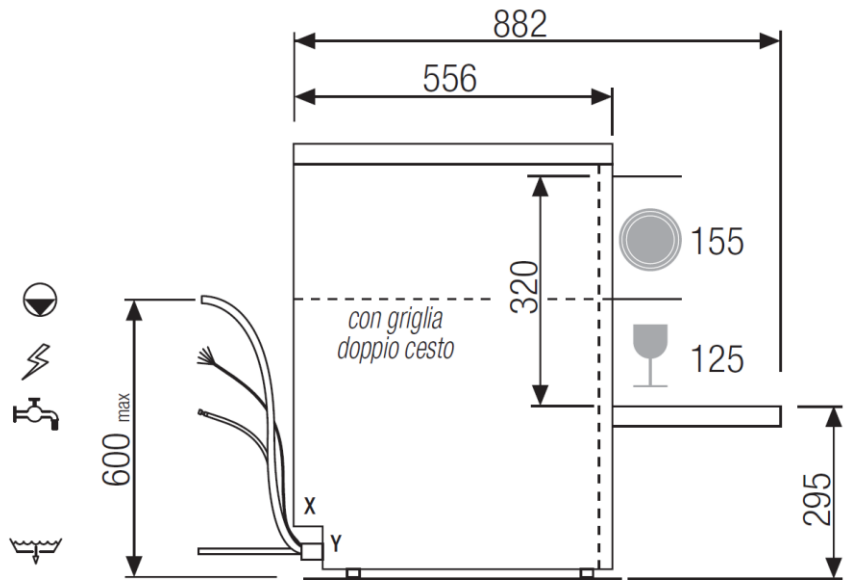
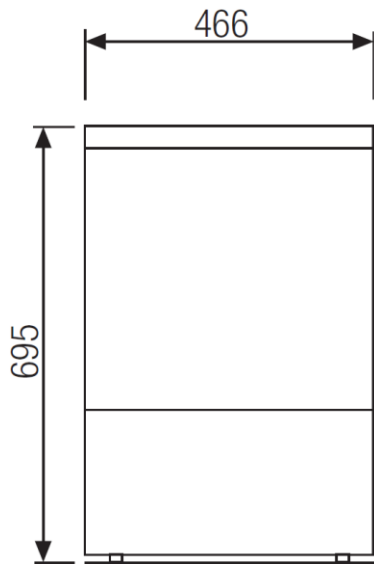
 Model		EW420		
Code Production		918733		
Interface : 				
	Overall Dimension (Width-Depth-Height) *open		mm	466x556(882*) x695 (845+legs)
	Packaging Dimension (WxDxH)		mm	660x560x870
	Gross weight		Kg	50
	Net weight		Kg	47
	Volume		mc	0,32
	Rack size		mm	400x400
	Rack's drives/frame construction			flat, special for 14" racks
	Max door opening		mm	320
	Max glasses height		mm	300
	General construction			double skin
	Door/hood Construction			double skin
	Tank construction			deep drawn
	Tank volume		liter	8
	Tank heating element		W	600
	Tank surface strainers			Yes – composite
	Wash pump type			double flow
	Wash pump power		W	200
	Wash temperature		°C	60
	Boiler type			without pressure
	Boiler volume		liter	2,6
	Back-flow system			break tank
	Boiler heating element		W	2.600
	Rinse booster pump			YES
	Rinse booster pump power		W	200
	Rinse temperature		°C	65 (80)
	Rinse water consumption		Liter /rack	1,5
	Optimal external water pressure		bar	2 - 4
	Optimal external water temperature		°C	50 – 65 °C
	Drain system			deep drain
	Drain pump			standard built in
	Rinse aid dispenser		peristaltic	YES
	Detergent dispenser		peristaltic	YES
	Water softner			NO
	Wash cycle		sec	90 - 120 - 150
	Special cycle		programs	n°4
	Self cleaning cycle			YES
	Electric Power		W	3.600
	Electric Connection		V - ph - Hz	240V 1N 50Hz
	Fuse		A	15
	racks 14" x 17"		Nr 2	706139
	Grid for Rack 17"		Nr 1	433026
	Insert		Nr 2	712020
	Special legs (h15cm)		n°4	461020
	Electric cable "Australian plug"			YES
	Drain hose			YES

Fill hose "WaterMark"	YES
-----------------------	-----



X: 77 mm - Y: 45 mm

