

**INDUSTRY
 KITCHENS**

www.industrykitchens.com.au 1800 611 058

Codice

BBG000

Modello

PROF TRAY 20

Caratteristiche costruttive - Building characteristics

Rivestimento INT/EST

INSIDE / OUTSIDE covering

Acciaio INOX AISI 304 / STAINLESS STEEL AISI 304

Resa per Ciclo

Output kg for blast chilling

+90° / +3° C Kg. 75 - 90 min.
 +90° / -18° C 55 - 240 min.

Classe

Class

40°C-40%

Spessore di isolamento

Thickness of isolation

mm.

60

Tensione V - Ph - Hz

Tension V-Ph-Hz

400N/3/50Hz

Dotazioni

Equipment

n°20 coppie di guide S/S - pairs of stainless steel slideways

Vaschette Gelato

Ice-cream Containers

24

Centralina elett.

Electronic central

TOUCHSCREEN

Gestione HACCP

HACCP Function

I

USB

USB

I

RS485

RS485

I

Connessione remota

Remote Connection

O

Lampade U.V. Ultraviolette

U.V. Lamps

O

Sonda al Cuore

Core Probe

I

Stampante

Printer

-

Net Weight

227

Peso netto

Kg.

Con imballo / Packed

240

Potenza frigorifera

Refrigeration power

ASHRAE

Watt

T. evap. -10° / +55° T. cond. BT

7100

T. evap. -25° / +55° T. cond. BT

3200

Valvola Termostatica

Thermostatic Valve

Valv.

Ventilatore evap.

Evaporator fan

Ø - Watt-Volt

3x315Ø-120W-230V

Sbrinamento

Defrosting

GAS CALDO - HOT GAS

Potenza riscaldamento

Heating power

Watt

Potenza umidificatore

Humidifier output

Watt

Compressore

Compressor

TECUMSEH

TAG2516Z

Gas

Gas

Kg.

R452A GWP: 2141

3,6

Ventilatore cond.

Condenser fan

Ø - Watt -Volt

2X300Ø-95W-230V

Assorbimento

Absorption

Kw 4,1 / A 7,2

Rumorosità

Noise

Db(A)

70

- Non disponibile / Not available

I Incluso / Included

O Optional / Optional

La ditta Everlasting s.r.l. si riserva il diritto di apportare ai propri prodotti quelle modifiche tecniche e stilistiche che riterrà necessarie o utili senza pregiudicare le caratteristiche essenziali. Everlasting reserves the right to modify technical and stylistic features of its products without any prior notice, should such modifications be necessary or useful and not affecting any essential features of the product itself.

Codice

Code

BBG000

Modello

Model

PROF TRAY 20




Dimensioni esterne con imballo

External dimensions packed

840x882x2369

ABBATTITORE ABF 20 PRO

001

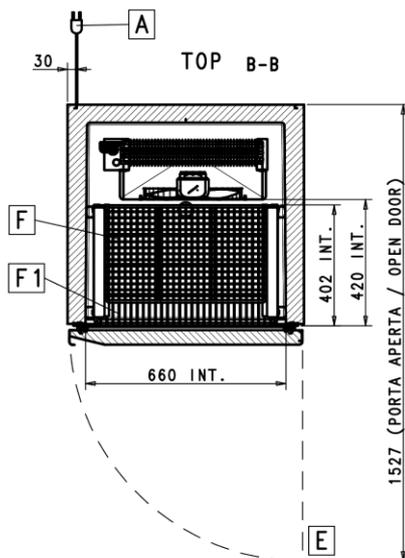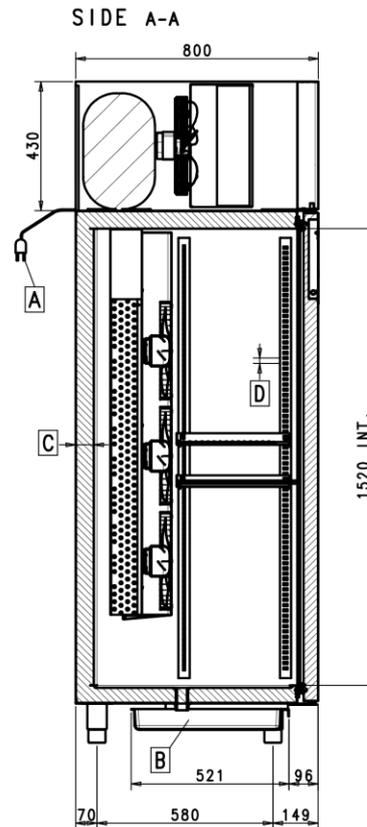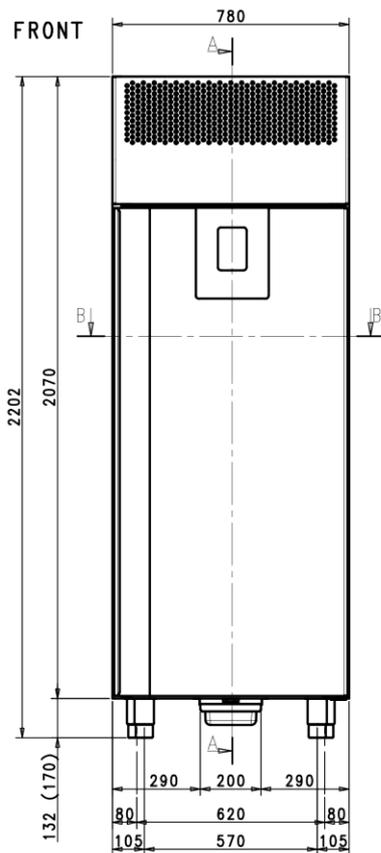

- A - Cavo Alimentazione L.2100 / Line cable 2100 mm length
- B - Vaschetta Raccogli Condensa / Condensate Drain Pan
- C - Spessore Coibentazione 60mm / 60mm insulation thickness
- D - Passo Cremagliere 17.5mm / Slideways support with 17.5mm pitch
- E - Possibilita' di apertura sx / Right hinged door , left hinged option available
- F - Griglia GN1 (325x530mm) non inclusa / Wire shelves GN1 (325x530mm) not included
- F1 - Griglia BN (600x400mm) non inclusa / Wire shelves BN (600x400mm) not included