

Specification

Flexeserve Zone® 5 Tier - Floor Standing

Only Flexeserve Zone® delivers true hot-holding and flexible merchandising in one display using our unique, patented hot air technology.

Exclusive features

- * Patented convection air system unlike any other heated display, for superior product quality, extended shelf life and industry-leading energy efficiency.
- * Individually controlled zones with fully adjustable temperatures, from ambient to 90°C, to suit multiple products.
- * Double glazed end panels and LED lighting to each shelf.
- * Innovative range of accessories available to increase capacity, improve product visibility and provide operational efficiencies.
- * Self-service heated display available in 3 widths.

Compelling benefits

- * **True hot-holding** - products held at optimum quality for longer and served as they were intended. Zones are thermally isolated with no heat transfer. Hot-hold products with different requirements within one unit.
- * **Extends food shelf-life** - quality and temperature are retained throughout the holding process, maximising shelf life and minimising waste.
- * **Energy efficient** - industry-leading energy efficiency.
- * **Large merchandising capacity** - Utilise the three-dimensional volume of each zone by double stacking, without impacting temperature or quality.
- * **Safety** - integrated over-temperature fail-safes, safe to touch surfaces and a flat shelf display for reduced risk of hot liquid spillages.
- * **Flexeserve® Solution** - our holistic approach includes menu development, cooking optimisation, packaging support and operational advice, to help you increase sales and profit.



Scan me to watch our Holistic Approach video.



PRODUCT CAPACITY
Holds up to 40 soup containers per shelf.



PATENTED TECHNOLOGY
Superior food quality and energy efficiency.




PRODUCT CAPACITY
Holds up to 20 roast chickens per shelf.

Unique air recirculation technology

There's a lot of hot air being spoken by others. Only Flexeserve Zone® uses patented, game changing convection technology to deliver true hot-holding. Hot air is continually circulated throughout the three-dimensional volume of each zone and creates a consistent and stable environment for your products.

This even distribution of air which can be set to the required temperature means food quality is maximised, unlike other heated displays that use outdated conduction which continue to cook food. In Flexeserve Zone®, product integrity is maintained, resulting in performance and food quality unlike anything you have ever seen.

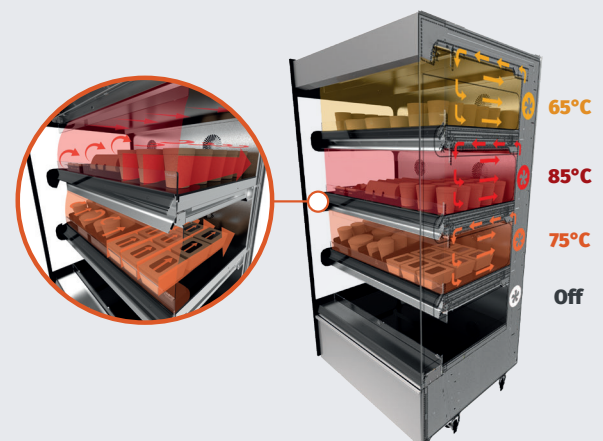


Specification

Flexeserve Zone® 5 Tier - Floor Standing

Flexeserve Zone® is available in a range of widths and tiers in a choice of curved or square profiles as standard.

Standard features

- * Stainless steel shelf edge.
- * Mirror polished back panel.
- * Stainless steel canopy and valance - magnetic.
- * Standard ticket strip (53mm height).
- * Fan guards.
- * LED lighting to each shelf.

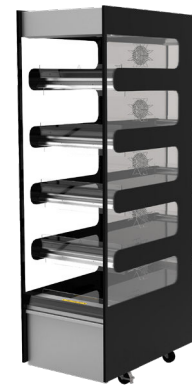


Model 600, Square Standard finishes

Customisation options

Complement your brand and store environment with bespoke options for customisation.

- * Customised header board.
- * Custom ticket / POS holders.
- * Bespoke colours - canopy, valance, shelf edges.
- * End panel graphics / colours.
- * Customised base board.
- * Bespoke printed night blind.

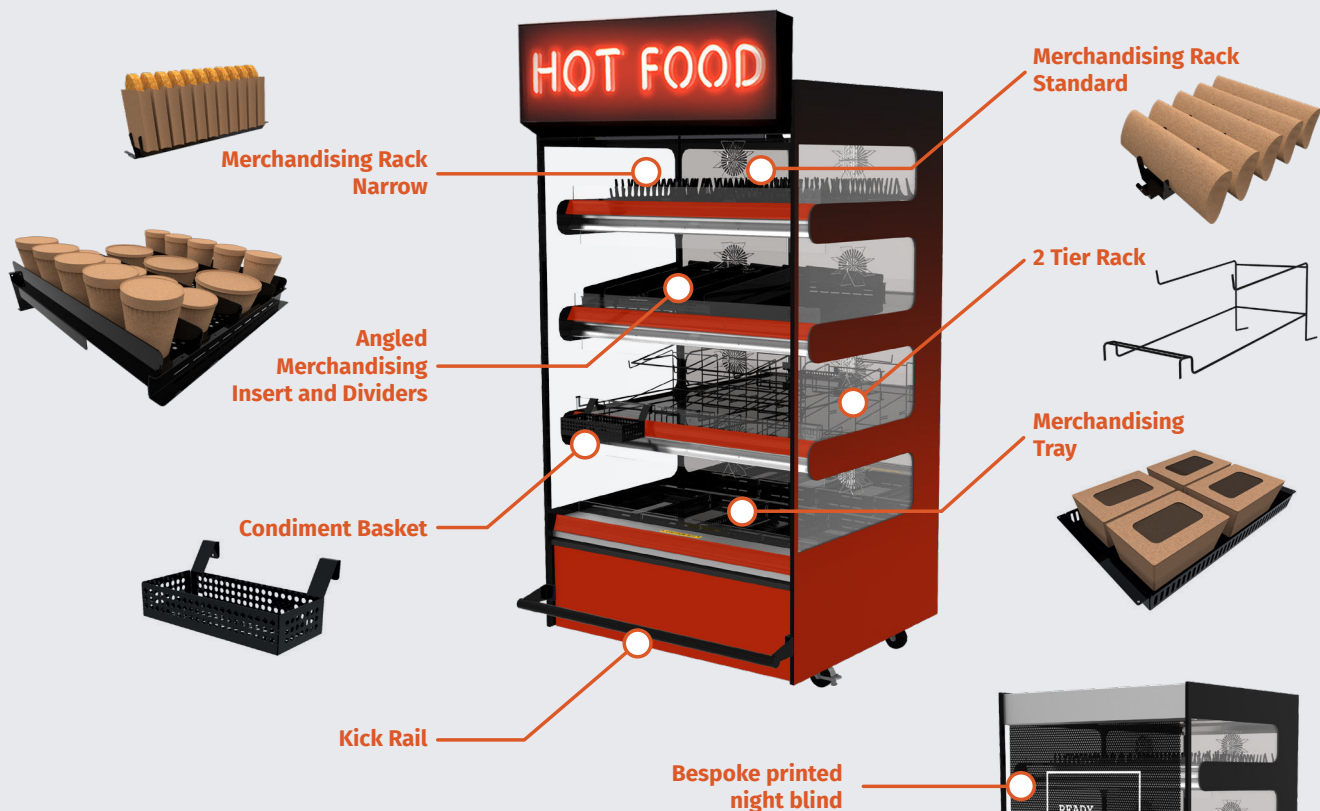

Accessories

Our innovative range of accessories increase visibility, capacity and operational efficiencies. They have been developed to be interchangeable and compatible with each other.



Scan me to view all accessories available for this model.

Specification

5 Tier - Floor Standing Square



MODEL TYPE	600 SQUARE	1000 SQUARE
PRODUCT CODE	FXZNA60S5S	FXZNA10S5S
UNIT H / W / D mm	1970 / 556 / 855	1970 / 975 / 855
SHELF SIZE W / D mm / CAPACITY m ²	526 / 547 / 0.29	946 / 547 / 0.52
UNIT WEIGHT Kg	223	298
ELECTRICAL INFORMATION		
POWER SUPPLY* UK / EU	16A 1Ph, 16A 3Ph	32A 1Ph, 16A 3Ph
TOTAL POWER PER ZONE	3.00A / 689W	6.01A / 1382W
TOTAL POWER PER UNIT	14.98A / 3445W	30.05A / 6910W
ENERGY CONSUMPTION - HOURLY		
ONE ZONE / ALL ZONES	0.39 kWh / 1.73 kWh	0.7 kWh / 3.5 kWh
SHIPPING CRATE		
SIZE H / W / D mm / WEIGHT Kg**	2230 / 750 / 1110 / 30	2230 / 1000 / 1110 / 40

5 Tier - Floor Standing Curved



MODEL TYPE	600 CURVED	1000 CURVED
PRODUCT CODE	FXZNA60S5C	FXZNA10S5C
UNIT H / W / D mm	1970 / 556 / 873	1970 / 975 / 873
SHELF SIZE W / D mm / CAPACITY M ²	526 / 547 / 0.29	946 / 547 / 0.52
UNIT WEIGHT Kg	220	295
ELECTRICAL INFORMATION		
POWER SUPPLY* UK / EU	16A 1Ph, 16A 3Ph	32A 1Ph, 16A 3Ph
TOTAL POWER PER ZONE	3.00A / 689W	6.01A / 1382W
TOTAL POWER PER UNIT	14.98A / 3445W	30.05A / 6910W
ENERGY CONSUMPTION - HOURLY		
ONE ZONE / ALL ZONES	0.39kWh / 1.73 kWh	0.7 kWh / 3.5 kWh
SHIPPING CRATE		
SIZE H / W / D mm / WEIGHT Kg**	2230 / 750 / 1110 / 30	2230 / 1000 / 1110 / 40

* **Model 600** Australia / New Zealand - 16A 1Ph or 16A 3Ph.

Model 1000 Australia / New Zealand - 32A 1Ph or 16A 3Ph.

** For accurate shipping weights including accessories and customisation, contact info@flexeserve.com

UNIT VENTILATION - A 50mm ventilation gap is required between the back of the unit and all solid surfaces.

Plug Types



EU




UK




Austria/Germany
Type F



Australia
Type I



Swiss
Type J/Type 23



Italy Type L



32AMP 1Ph
Commando




16AMP 3Ph
Commando

Specification

5 Tier - Floor Standing


Front View - Square / Curved

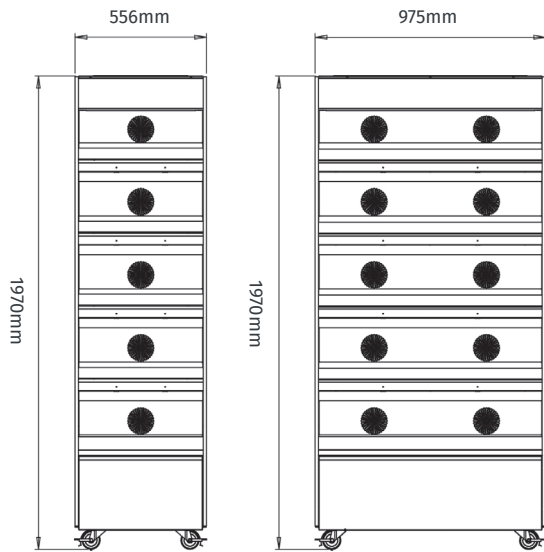


MODEL 600

MODEL 1000


Profile View - Square

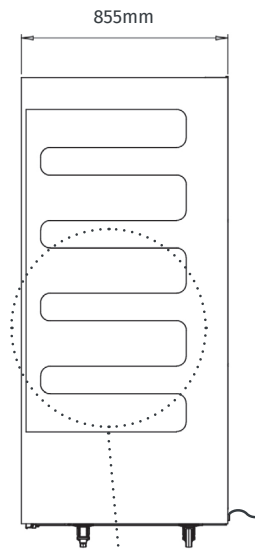


Interior Zone Dimensions



Profile View - Curved

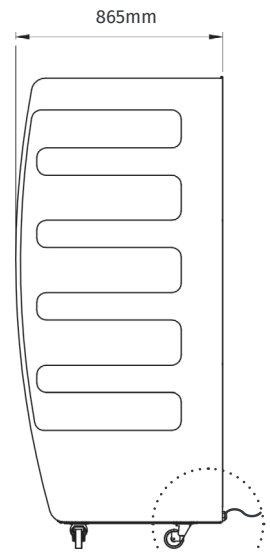


Castor Height & Power Cord Height / Length*



*Power cord length 3m

Shelf Footprint - Square / Curved

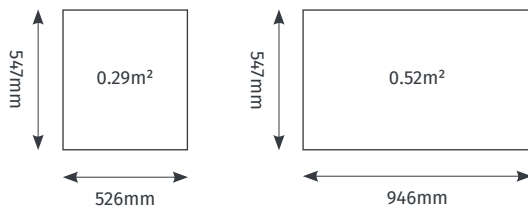


Product capacity*

PACKAGING CATEGORY	MODEL 400	MODEL 600	MODEL 1000
ROTISSERIE CHICKEN	6 Per Zone	8 Per Zone	16 Per Zone
SOUP CONTAINER	15 Per Zone	25 Per Zone	45 Per Zone
WRAP / BURRITO	8 Per Zone**	16 Per Zone**	32 Per Zone**
BOWL (double stacked)	6 Per Zone	18 Per Zone	30 Per Zone

*Product capacity is an indication only, based on generic food packaging.

**Using Flexeserve Zone® Merchandising accessories - for complete range visit www.flexeserve.com/flexeserve-zone/accessories-and-customisation/

ACCESSORIES



FLEXESERVE ZONE® PATENTS

WO2014072693, WO2015044637, EP2916692, EP3048931, GB2509207, GB2518524, US2016213168, US2016235218, HK1193011, CA2925157, AU2014326399.

ACCREDITATIONS

Compliance/approval to standards NSF-4, UL 197, CSA STD C22.2 No.109.



FLEXESERVE® | THE ALAN NUTTALL PARTNERSHIP LTD Reserve the right to alter information due to continued improvement in design. Flexeserve Zone® is tested at conditions of +18°C.

flexeserve® | Nuttall

For further information

[e] info@flexeserve.com [w] www.flexeserve.com