



FLEXICOMBI CLASSIC 10.1 ELECTRIC


MKN No.: FKE101R_CL



MKN combi steamer FlexiCombi 10 tray GN 1/1 or 10 FlexiRack® (530 x 570 mm) with manual operation system.

Product Advantages:

- FlexiRack® – 50% more cooking capacity (= save time and energy).
- ClimaSelect – Humidity and temperature control measurement (= reliable food quality).
- 5 programmable fan speeds for best cooking uniformity.
- Up to 100 individual cooking programmes can be stored in up to 6 steps.
- 316 S 11 durable hygienic cooking chamber.
- EasyLoad crosswise insertion.
- Handshower.
- DynaSteam² – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system (safe, easy, economical).
- USB interface.
- 3 years warranty parts and labour.

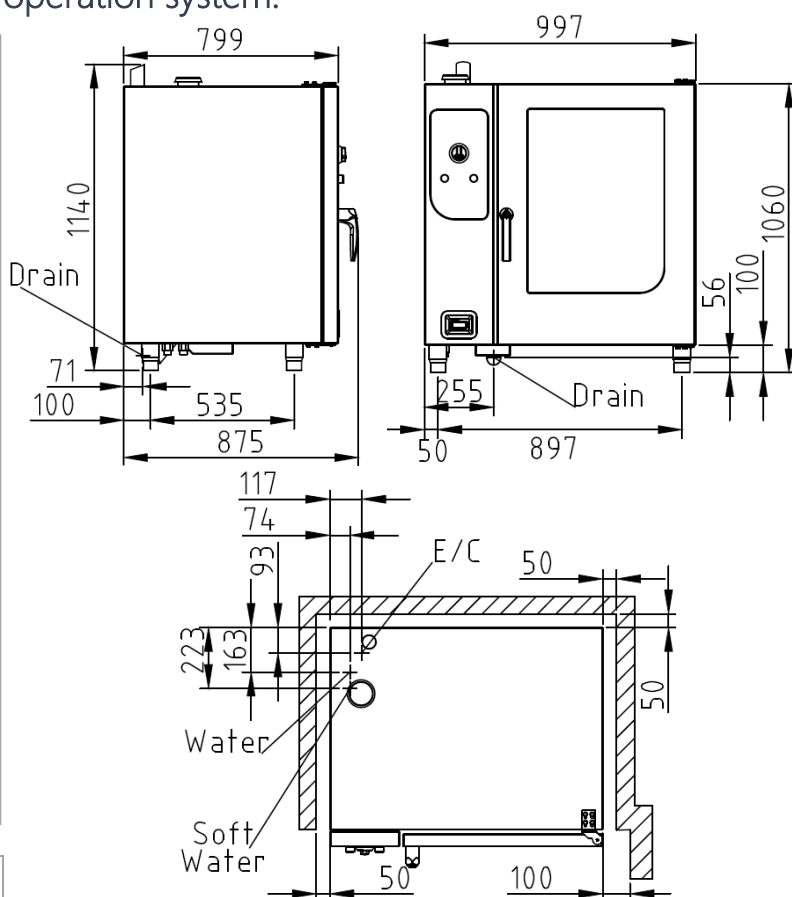

Capacity: Meals per day	80 – 150 (GN 1/1)
	80 – 200 (FlexiRack)



Installation requirements:

- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.

Technical Data:

Width x Height x Depth (mm)	997 x 1060 x 799
Connected load (electrical) (kW):	15.9
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 32
Frequency range (Hz):	50
Soft Water connection:	DN 20 (R ¾" inside)
Water connection:	DN 20 (R ¾" inside)
Waterpressure (kPa):	200 - 600 (2 - 6 bar)
Drain connection:	DN 50
FlexiRack® (530 x 570 mm)	10 (max. 65 mm deep)
Gastronorm 1/1 (530 x 325 mm):	10 (max. 65 mm deep)
Plates Ø 28 cm on FlexiRack® grids:	40
Plates Ø 32 cm – plate trolley :	40
Material housing:	1.4301
Material cooking chamber:	1.4404
Gross weight (kg):	180
Heat emission latent (W):	2862
Heat emission sensitive (W):	1908
Type of protection:	IPX 5



Phoenixs
INNOVATIVE KITCHEN SOLUTIONS

Unit 6, 23-25 Clarice Road, Box Hill South, VIC, 3128
P: 1300 405 404, E: contact@phoenixs.com.au