



Aroma Perfect Taste




Model: CSACG1A-R290

Aroma

SEASONER CABINET - SEASONER - 510 LT. AIR CONDENSING UNIT - TEMP. -2 / +5 °C




Ideal climate




Create your layout



Easy to use



Experience at your service




Easy to clean




Maximum visibility



Energy saving



Always perfect results



Ideal for every installation



Ecological refrigerant gas

CE

CONTROL MECHANISMS

- HACCP alarm management.
- Specific probe for humidity regulation.
- The know-how of the best experts at your disposal
- 5" touch screen color display with control interface
- Responsive humidity management
- Automatic climate change management
- Connectivity with Wi-Fi remote control (optional).

STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- Internal stainless steel.
- External Scotch Brite satin finish stainless steel
- Insulation thickness: 80 mm.
- High density CFC and HCFC-free PU insulation (42 kg/m³).
- Ergonomic stainless steel handle.
- Self-closing doors and magnetic gaskets.
- Silk-screened tempered glass easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Rounded cell corners for easy cleaning
- Locking fixtures.
- Integrated LED lighting on the dashboard.
- Wide range of customization possibilities
- Indirect ventilation thanks to the full-length duct system for optimal air circulation and uniform temperature distribution.

CONDENSING UNITS

- Monoblock ceiling system with an evaporator outside the cold room to allow for the exploitation of the entire refrigerated volume.
- Automatic defrost and defrost water self evaporating.
- Tropicalized group (class "T" 43°C).
- R290 ecological refrigerant gas
- Climate class 5.

STANDARD EQUIPMENT

- 2x "C"-slides couple
- 1x drip tray
- 1x GN 2/1 grill
- 1x Mobile rod for hooks
- Wi-Fi connection. Compatible with IEEE 802.11g (2.4GHz) standard

OPTIONAL TO BE REQUESTED WHEN ORDERING

SGAC: Hook complete with "C"-slides couple

SZC-ICE: Closing plinth

SCGCA-A: "C" slides couple - with anti-tip

SVRG: Dip tray with GN 2/1 grill and "C"-slides couple

SKRT-02: Castor kit, 2 with brake

TS-AVPG: AC 208/230 V - 60 Hz

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

IOTK-A: Connectivity kit

CGCA-A: "C" slides couple - with anti-tip

VRG: Dip tray with GN 2/1 grill and "C"-slides couple

GAC: Hook complete with "C"-slides couple

ZC-ICE: Closing plinth

GACM: Mobile rod for hooks

GACF: Single hook

IOTC-1: Coldcloud connection fee - 1 year

IOTC-3: Coldcloud connection fee - 3 years

KRT-02: Castor kit, 2 with brake

GRI-GN21: Stainless steel grill - GN 2/1

CAPACITY

Capacity	20 x GN 2/1			
----------	-------------	--	--	--

DIMENSIONS

Width	mm	780	inch	30.7
Depth	mm	965	inch	38.0
Height	mm	2090	inch	82.3
Packaging width	mm	820	inch	32.3
Packing depth	mm	1005	inch	39.6
Packaging height	mm	2240	inch	88.2
Net weight	kg	199	lbs	438.8
Gross weight	kg	209	lbs	460.8
Volume	m3	1.6	ft3	56.5
Packing volume	m3	1.8	ft3	63.6
Useful Inner Width	mm	620	inch	24.4
Inner depth	mm	725	inch	28.5
Doors numbers		1		


TECHNICAL DATA

Working temperature	°C	-2 / +5
Motor	On board	
Cooling mode	Air	
Climate class	5	
GWP - Global Warming Potential	1430	
Refrigerant - Type	R290	
Refrigerant - Quantity	g	150

POWER SUPPLY

Power supply voltage	1N-AC 230 V	
Electrical absorption	A	6.6
Frequency	Hz	50
Total electric power	kW	1.373
Cooling power *	kW	0,696

* TN – Evap. temp. -10°C / Cond. temp. +45°C

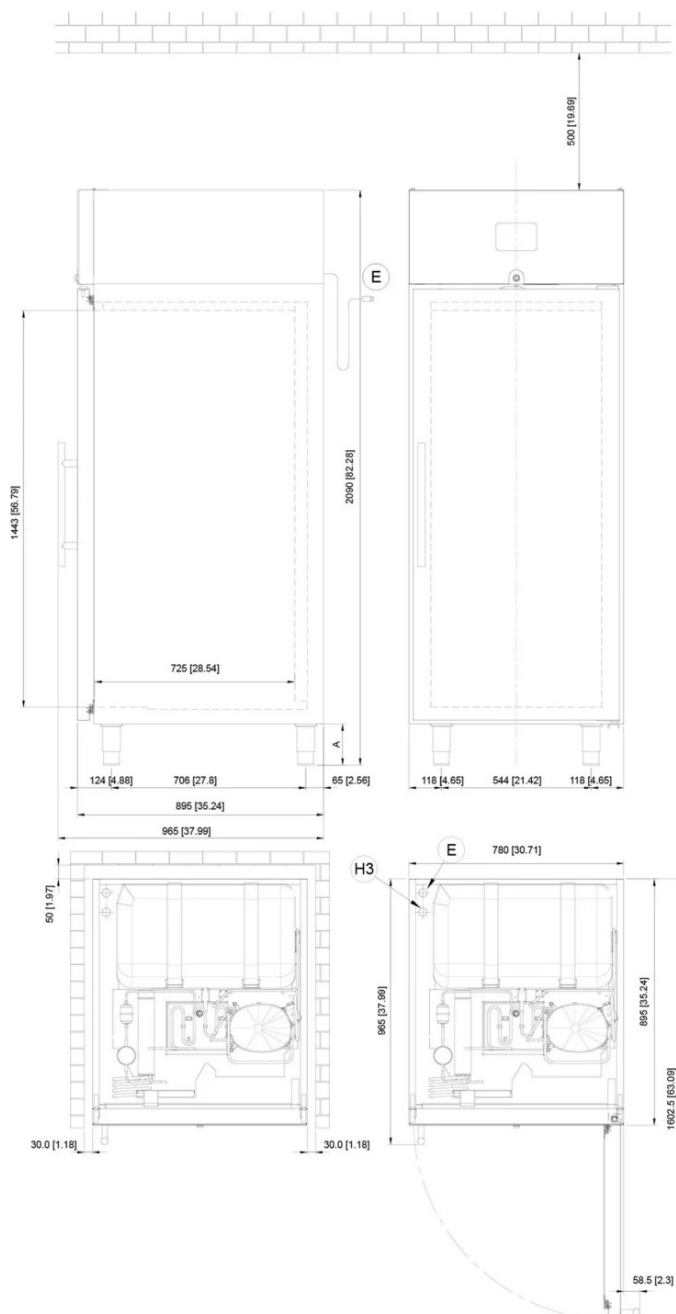

DIMENSIONI mm

DIMENSIONS [in]

A = 140 / 200 PIEDINI - FEET

A = 155 RUOTE ø 100 - CASTORS ø 100

E IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA
 EN - ELECTRICAL POWER SUPPLY CABLE INLET
 FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE
 DE - ANSCHLUß STROMKABEL
 ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA
 RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ

H3 CONNESSIONE INGRESSO ACQUA UMIDIFICATORE
 HUMIDIFIER WATER INLET CONNECTION