

INDUSTRY
KITCHENS

www.industrykitchens.com.au 1800 611 058



Intuitive control, great freedom

Smart and essential, the 5" touch screen, placed at your fingertips and at eye level on the door of the blast chiller, offers immediate visibility and interaction with the functions, represented by intuitive and easy-to-read symbols




Model: RBS-121-SA-R290

Ready

Tray type: 12 x 1/1 GN - 12 x EN1

READY BLAST CHILLING, CABINET - 12 X GN 1/1 - 12 X EN1. +3 / -40 °C - AIR CONDENSING UNIT

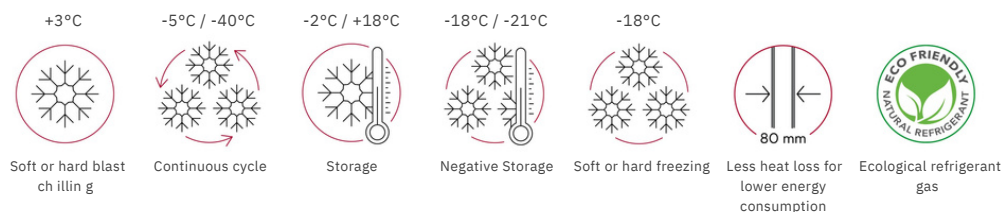

Coast Distributors Pty Ltd
 Ph: (02) 9524 1234 / 1800 688 590
 PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

COMMANDS, CONTROLS AND SAFETY DEVICES

- 5" touch screen color display with control interface
- Quick-release heated core probe with 4 measuring points
- USB connection for uploading and downloading data/recipes
- Processes identifiable by pictograms and text

STRUCTURAL CHARACTERISTICS

- External Scotch Brite satin finish stainless steel.
- 80 mm-thick insulation.
- High density CFC and HCFC-free PU insulation (42 kg/m3).
- Stainless steel internal coating with fully rounded corners
- Die-moulded and leakproof internal base
- Magnetic seal on 4 sides of the door
- Indirect-flow electric fans - made of composite material - on the product
- Side guide-supporting uprights with 18 mm-pitch holes
- Compressor-protecting automatic-reset thermal circuit breaker
- Copper-aluminium evaporating coil, cataphoresis-painted with non-toxic epoxy resin
- Copper condensing coil with high thermal efficiency aluminium fins
- Full-length flush ergonomic handle
- Anti-condensation heating element situated on the body frame, under the stop
- Double-pitch (GN-EN) stainless steel slides, removable and equipped with anti-tip system
- Slide for etagere insertion

REFRIGERANT GROUP

- Automatic defrost and defrost water self evaporating without the use of energy.
- R290 ecological refrigerant gas
- Provision for other types of refrigerant gas on request
- Hermetic compressor

VERSIONS AVAILABLE

- Model with wheels
- Model with left hinged door

STANDARD EQUIPMENT

- UNEQUIPPED REMOVABLE GRILL-HOLDING PANELS IN AISI 304 18/10 STAINLESS STEEL, WITH DOUBLE L-SHAPED GUIDES
- USB CONNECTION FOR UPLOADS AND DOWNLOADS
- QUICK-RELEASE HEATED CORE PROBE WITH 4 MEASURING POINTS

OPTIONAL TO BE REQUESTED WHEN ORDERING

TS-121-440-3N-60Hz-HR: 440-3N-60Hz-HR

TS-121-360-3N-60Hz-HR: 360-3N-60Hz-HR

TS-121-208-3-60Hz-HR: 208-3-60Hz-HR

CA-121: WOODEN CRATE PACKAGING

KRT-02: WHEEL KIT WITH BRAKE

PSX-121: LEFT HINGED DOOR

ICEK-121: ICE CREAM KIT - 6 RAIL PAIRS + 6 GN 1/1 GRIDS

Coast Distributors Pty Ltd
Ph: (02) 9524 1234 / 1800 688 590
PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

I O TK: CONNECTIVITY KIT

GRI-EN1: STAINLESS STEEL GRILL - EN1

GRI-GN11: STAINLESS STEEL GRILL - GN 1/1

CGM: PAIR OF MULTI-STEP GUIDES

SSV12: VACUUM PROBE - 1,2 MT.

SM012: MONO-POINT PROBE - 1,2 MT.

SMU12: MULTIPOINT PROBE - 1,2 MT.

IOTC-3: COLD CLOUD CONNECTION FEE - 3 YEARS

IOTC-1: COLD CLOUD CONNECTION FEE - 1 YEAR

Coast Distributors Pty Ltd
Ph: (02) 9524 1234 / 1800 688 590
PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

DIMENSIONS

Width	790 mm
Depth	870 mm
Height	1810 mm
Door Span Width	670 mm
Internal Depth	450 mm
Package width	830 mm
Package depth	970 mm
Package height	1960 mm
Package volume	5,05 m3
Weight	190 Kg
Weight with package	230 Kg

TECHNICAL DATA

Working temperature	+3 / -40 °C
Motor	Air condensing unit
PU insulation - Thickness	60 mm
Refrigerant - Type	R290

CAPACITY

Capacity	12 x 1/1 GN - 12 x EN1
----------	------------------------

POWER SUPPLY


Max electric power	2,506 kW
Cooling power	2,274 kW
Max consumption	5,05 A
Power supply voltage	400 V
Electrical_Phase	3
Frequency	50 Hz

YIELDS AND PERFORMANCE

Yield per cycle +90/+3°C	65 Kg
Yield per cycle +90/-18°C	45 Kg
Yield per BC cycle according to standard EN17032 (+65/+10°C)	60 Kg
Yield per BF cycle according to standard EN17032 (+65/-18°C)	35 Kg
BC consumed energy according to standard EN17032	0,073 kW h/kg
BF consumed energy according to standard EN17032	0,232 kW h/Kg
BC test time according to standard EN17032	115 min
BF test time according to standard EN17032	256 min

* BT - Evap. temp. -25°C / Cond. temp. +45°C.

Coast Distributors Pty Ltd
 Ph: (02) 9524 1234 / 1800 688 590
 PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

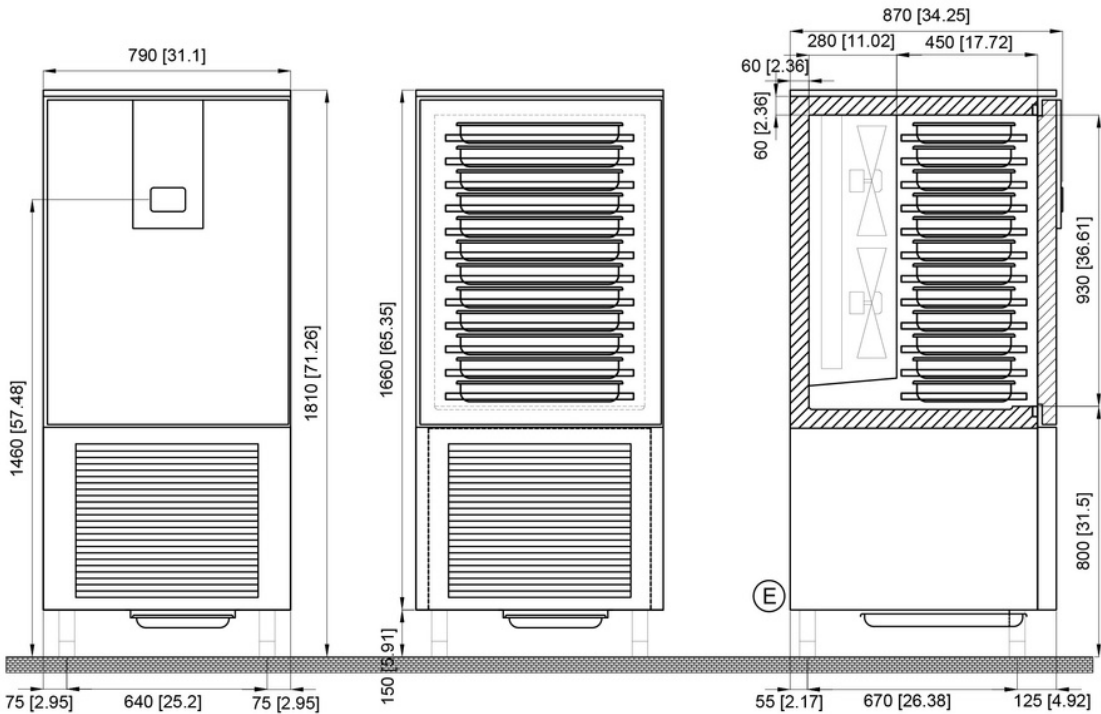

DIMENSIONS mm
DIMENSIONS [in]

