

INDUSTRY
KITCHENS

www.industrykitchens.com.au 1800 611 058



Intuitive control, great freedom


Smart and essential, the 5" touch screen, placed at your fingertips and at eye level on the door of the blast chiller, offers immediate visibility and interaction with the functions, represented by intuitive and easy-to-read symbols



Model: RBS-122-SA

Ready

BLAST CHILLER FOR SMALL TO MEDIUM CATERING & THE BAKING SECTOR. BOOSTED VERSION. TRAY CAPACITY 11 X 2/1 GN - 22 X 1/1 GN - 22 X EN1. AIR CONDENSING UNIT.

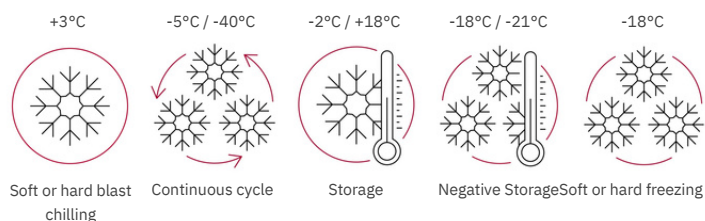

Coast Distributors Pty Ltd
 Ph: (02) 9524 1234 / 1800 688 590
 PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

HOW TO USE

- POSITIVE BLAST CHILLING +90 / +3°C AT THE SOFT AND HARD CORE
- +3°C STORAGE AT THE END OF THE CYCLE
- FAST SOFT AND HARD CORE FREEZING +90 / -18°C
- -18°C STORAGE AT THE END OF THE CYCLE
- AUTOMATIC FISH SANITIZING CYCLE
- AUTOMATIC ICE CREAM HARDENING CYCLE

CONTROL MECHANISMS

- 5" touch screen color display with control interface
- Connectivity available on request
- Quick-release heated core probe with 4 measuring points
- Processes identifiable by pictograms and text
- Bluetooth connection enabled via free app to monitor and download HACCP data (optional)
- Alarm viewing.
- Internal fan stop by micro switch when door is opened.
- Customizable programs for your own recipes

STRUCTURAL CHARACTERISTICS

- External Scotch Brite satin finish stainless steel.
- High density CFC and HCFC-free PU insulation (42 kg/m3).
- Highly ventilated evaporator to ensure the cooling system's maximum efficiency
- Stainless steel internal coating with fully rounded corners
- Die-moulded and leakproof internal base
- Magnetic seal on 4 sides of the door
- Indirect-flow electric fans - made of composite material - on the product
- Side guide-supporting uprights with 18 mm-pitch holes
- Compressor-protecting automatic-reset thermal circuit breaker
- Copper-aluminium evaporating coil, cathaphoresis-painted
- Copper condensing coil with high thermal efficiency aluminium fins
- Full-length flush ergonomic handle
- Anti-condensation heating element situated on the body frame, under the stop
- Double-pitch (GN-EN) stainless steel SLIDES, removable and equipped with anti-tip system
- Slide for etagere insertion
- Insulation thickness: 60mm.
- Heating door frame

CLEANING AND MAINTENANCE

- Easy to wash and hygienic safety due to the suspended evaporator coil.
- Easy to clean in accordance with UNI EN 14159 hygiene regulations.

CONDENSING UNITS

- Provision for other types of refrigerant gas on request
- Automatic defrost and defrost water self evaporating without the use of energy.

VERSIONS AVAILABLE

- Model with wheels
- Model with left hinged door

STANDARD EQUIPMENT

- UNEQUIPPED REMOVABLE GRILL-HOLDING PANELS IN AISI 304 18/10 STAINLESS STEEL, WITH DOUBLE L-SHAPED GUIDES
- USB CONNECTION FOR UPLOADS AND DOWNLOADS
- QUICK-RELEASE HEATED CORE PROBE WITH 4 MEASURING POINTS

Coast Distributors Pty Ltd
Ph: (02) 9524 1234 / 1800 688 590
PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

OPTIONAL TO BE REQUESTED WHEN ORDERING

- CA-122: WOODEN CRATE PACKAGING
- KRT-03: WHEEL KIT WITH BRAKE
- PSX-122: LEFT HINGED DOOR
- ICEK-122: ICE CREAM KIT - 5 SLIDES COUPLES + 5 GN 2/1 GRIDS

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

- TS-122-440-3N-60Hz-R: 440- 3N- 60HZ- RR
- TS-122-360-3N-60Hz-R: 360- 3N- 60HZ- RR
- TS-122-208-3-60Hz-RR: 208- 3- 60HZ- RR

Coast Distributors Pty Ltd
Ph: (02) 9524 1234 / 1800 688 590
PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

Capacity

Capacity	24 x GN 1/1 24 x EN (600 x 400)
Distance between layers	75 mm
No. of layers - h 20	44
Distance between layers - h 20	37.5 mm
No. of layers - h 40	28
Distance between layers - h 40	56.25mm
No. of layers - h 65	22
Distance between layers - h 65	75 mm

Dimensions

Width	1100 mm
Depth	1080 mm
Height	1860 mm
Packaging width	1140 mm
Packing depth	1180 mm
Packaging height	2010 kg
Net weight	255 kg
Gross weight	295 kg
Volume	2.21 m3
Packing volume	2.7 m3
Useful Inner Width	670 mm
Inner depth	930 mm
PU insulation - Thickness	60mm

Technical Data

Working temperature	+3 / -40 °C
PU insulation - Thickness	60 mm
GWP - Global Warming Potential	2141
Refrigerant - Type	R452A
Refrigerant - Quantity	2300 g

Power supply

Power supply voltage	3N-AC 400 V
Electrical absorption	8,18 A
Frequency	50 Hz
Total electric power	3,963 kW
Cooling power	3,619 kW

Blast chilling

Blast Chilling Capacity in 90' +90 / +3°C	80 kg
Freezing Capacity in 240' +90 / -18°C	60 kg
Blast Chilling Capacity in 120' +65 / +10°C - BC standard EN17032	80 kg
Freezing Capacity in 270' +65 / -18°C	55 kg
Blast Chilling cycle time - BC standard EN17032	109 min
Freezing cycle time - BF standard EN17032	255 min
Blast Chilling energy consumed - BC standard EN17032	kW h / kg0,064
Freezing cycle energy consumed - BF standard EN17032	kW h / kg0,228

Water Connection

Discharge	mm 1/2"
-----------	---------

Emissions

Noisiness	db< 70
-----------	--------

* BT - Evap. temp. -25°C / Cond. temp. +45°C.

Coast Distributors Pty Ltd
 Ph: (02) 9524 1234 / 1800 688 590
 PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

