




### Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 900 series, gas frytop with 12mm smooth mild steel plate (32.4 MJ/h)  
(also available in 12mm ribbed mild steel plate)
- Piezo ignition burners with flame failure device and pilot burner
- Temperature regulation via variable power flame control
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Hermetically sealed, pressed work surface with raised edges to protect from overflow
- Removable grease tray
- 24-month warranty

### General Drawing:

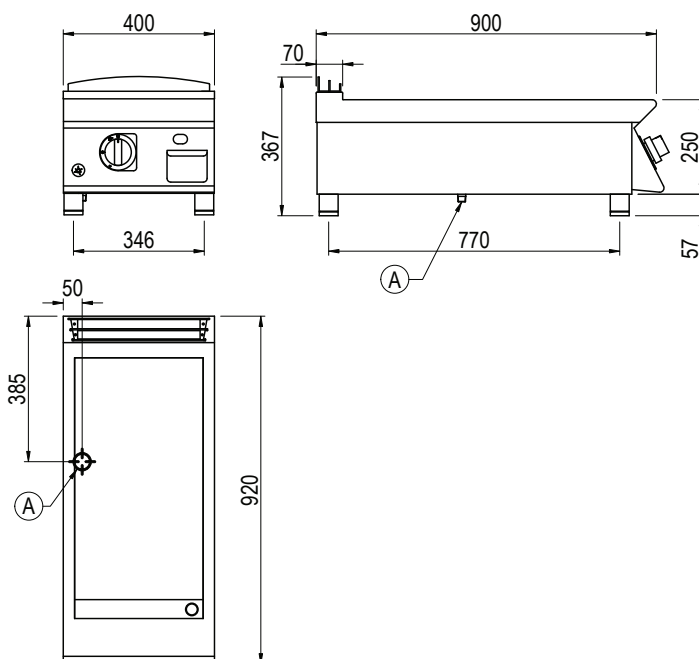

### Specifications:

|                                  |                  |               |
|----------------------------------|------------------|---------------|
| Model - Smooth                   | FLG92TFT         |               |
| Model - Ribbed                   | FRG92TFT         |               |
| W x D x H (mm)                   | 400 x 920 x 367  |               |
| Weight                           | 70kg             |               |
| Cooktop (mm)                     | 340 x 640        |               |
| Packed Dimensions (mm)           | 450 x 1025 x 570 |               |
| Packed Weight (mm)               | 77kg             |               |
|                                  | Natural          | Universal LPG |
| Gas Connection                   | 1/2" BSP         | 1/2" BSP      |
| Minimum Normal Test Gas Pressure | 1.3 kPa          | 2.75 kPa      |
| Maximum Normal Test Gas Pressure | 3.5 kPa          | 3.5 kPa       |
| Nominal Test Point Pressure      | 1.0 kPa          | 2.65 kPa      |
| Total Nominal Gas Consumption    | 32.4 MJ/h        | 32.4 MJ/h     |

**Note:** It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

### Legend:

A Gas Connection