



Goldstein

800 SERIES RANGES GAS COOKTOPS

PFB48-X, PFB12G6-X, PFB24G4-X, PFB36G2-X
PFB12Q6-X, PFB24Q4-X, PFB36Q2-X



Standard features and benefits

- High performance, even heat 33 MJ open burners
- Fully welded surrounds for griddle and chargrill option
- Heavy duty welded stainless steel body for rigidity and durability
- The flexible modular cooktop design allows for various combinations of burners, griddle plates, and chargrill options (305, 610, 914 and 1219mm)
- Constant pilot flame, maximises operating and energy efficiency
- Pilot flame failure on open burners
- Stainless steel fascia and sides, spill zone and drip trays for ease of cleaning
- Large, heat resistant reinforced control knob with easy to view settings and high to low flame control
- Griddle and chargrill section are on left hand side
- Adjustable legs
- Easy to service

Burners

- Removable, high performance, even heat 33 MJ cooktop burners for peak productivity
- 40% of the flame ports are in the centre cross of the burner
- Cast iron star trivet

Griddle plate

- 20mm thick mild steel griddle plate
- 20 MJ griddle burners per every 305mm section
- Piezo ignition

Chargrill

- Heavy duty cast iron reversible grates provide greater control when cooking, energy efficiency, and offer two char pattern options
- 2 levelling options - flat or gradient
- 2x 20 MJ inline radiant burners per every 305mm section
- Front grease trough, generous chute and catcher
- Ceramic rocks to increase heat retention and flavour

Other options

- Bench mounted
- Stand with undershelf



**INDUSTRY
KITCHENS**

www.industrykitchens.com.au 1800 611 058



Cert. No.
AGA 7732



MIDDLEBY GOLDSTEIN

1800 013 123 | +61 2 9604 7333
sales@middleby.com.au
middleby.com.au


VIC - TAS - 47 Stubbs Street, Kensington VIC 3031
QLD - U12, 210 Queensport Rd Nth, Murarrie QLD 4172
WA - U2, 9 Meares Way, Canning Vale WA 6155

**HEAD OFFICE
AND MANUFACTURING PLANT**
211-217 Woodpark Road, Smithfield NSW 2164

vl_2025



PFB48-X, PFB12G6-X, PFB24G4-X, PFB36G2-X, PFB12Q6-X, PFB24Q4-X, PFB36Q2-X 800 SERIES GAS COOKTOPS

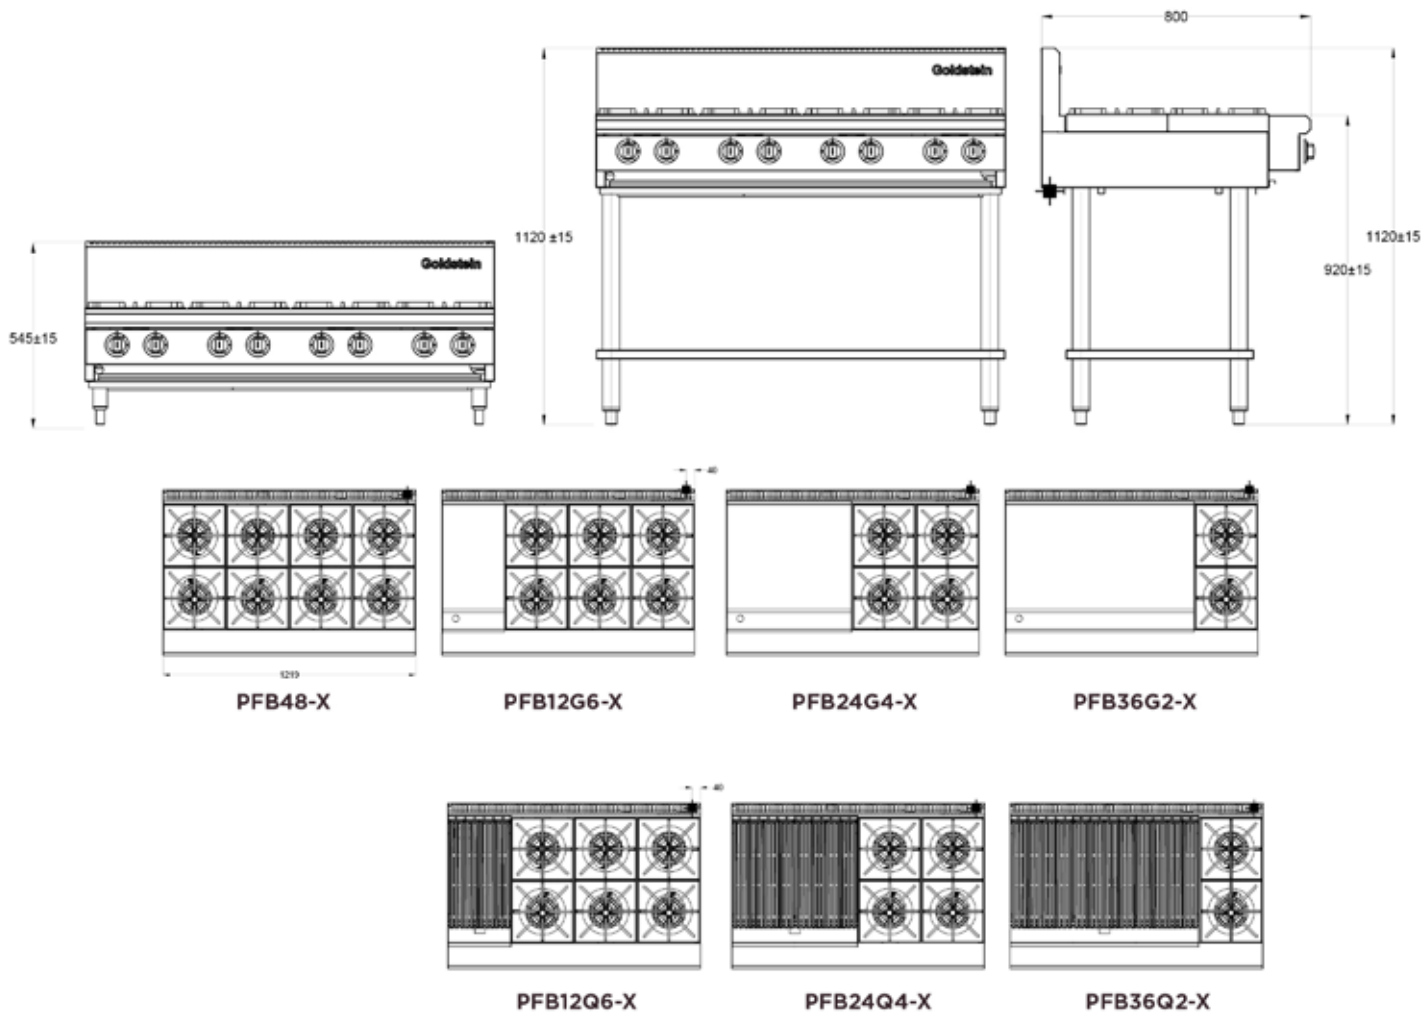

3/4" BSP Gas Connection

SPECIFICATIONS

Dimensions (WxDxH)	bench mounted	1219 x 800 x 545 mm
	on stand	1219 x 800 x 1120 mm
Griddle size	PFB12G6-X	305 x 520 x 20 mm
	PFB24G4-X	610 x 520 x 20 mm
	PFB36G2-X	914 x 520 x 20 mm
	PFB12Q4-X	305 x 510 mm
Chargrill size	PFB24Q2-X	610 x 510 mm
	PFB36Q2-X	914 x 510 mm

Available in Natural and LP gas

INSTALLATION CLEARANCES (minimum)

Combustible Material	Sides	250* mm
	Back	50 mm

Note: * If adjacent surface is of combustible material and is 100mm below the cooking surface, then only 50mm clearance is required.

Gas connection	3/4" BSPM
PFB48-X	264/264 MJ
PFB12G6-X	218/218 MJ
PFB24G4-X	172/172 MJ
PFB36G2-X	126/126 MJ
PFB12Q6-X	238/236 MJ
PFB24Q4-X	212/208 MJ
PFB36Q2-X	186/180 MJ
Packed dimensions without stand	1280 x 900 x 870 mm

Rating NG/LPG

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.



1800 013 123 | +61 2 9604 7333
sales@middleby.com.au
middleby.com.au

VIC - TAS - 47 Stubbs Street, Kensington VIC 3031
QLD - U12, 210 Queensport Rd Nth, Murarrie QLD 4172
WA - U2, 9 Meares Way, Canning Vale WA 6155

HEAD OFFICE AND MANUFACTURING PLANT
211-217 Woodpark Road, Smithfield NSW 2164

vl_2025