

Commercial Tapware



GUARDIAN TAPWARE®

Bench Mount Infrared Sensor Tap

T-3MSS-HMSTB

T-3MSS-HMSTB-TV



T-3MSS-HMSTM

T-3MSS-HMSTM-TV


Available in mains or battery powered, with optional tempering valve

- Battery powered – 2x CR123 3V Lithium Batteries

- Mains powered – 6V transformer
- Full S/S construction
- Sensor range nominal: 50mm – 200mm
- Maximum run time: 60 seconds
- WELS 6 Star 4LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 50 degrees




240v Power supply




Solenoid Unit


Top



Front

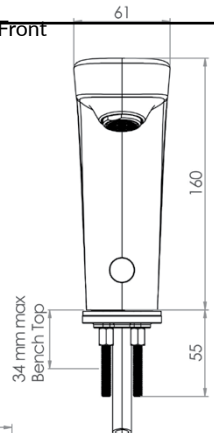

Side

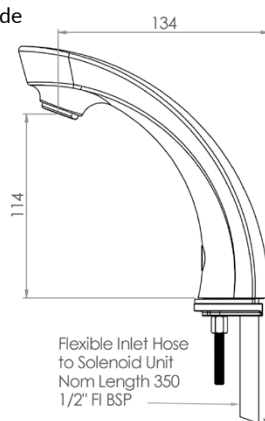

Flexible Inlet Hose to Solenoid Unit
Nom Length 350 1/2" FI BSP



T-3MSSP-HMST-M



T-3MSSP-HMST-CBS



T-3MSSP-HMST-BP



T-3MSSP-HMST-3M

* Power Supply with 3 metre lead available separately