

# Commercial Tapware



# GUARDIAN<sup>®</sup> TAPWARE

## Bench Mount Infrared Sensor Tap

**T-3MSS-HMSTB**



**T-3MSS-HMSTB-TV**

**T-3MSS-HMSTM**


**T-3MSS-HMSTM-TV**

*Available in mains or battery powered, with optional tempering valve*

- Battery powered – 2x CR123 3V Lithium Batteries




240v Power supply




Solenoid Unit

- Mains powered – 6V transformer
- Full S/S construction
- Sensor range nominal: 50mm – 200mm
- Maximum run time: 60 seconds
- WELS 6 Star 4LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 50 degrees


Top



Front

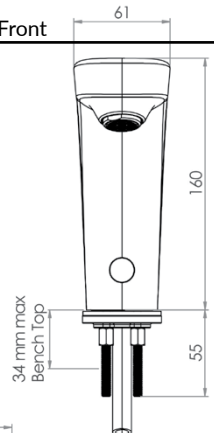

Side

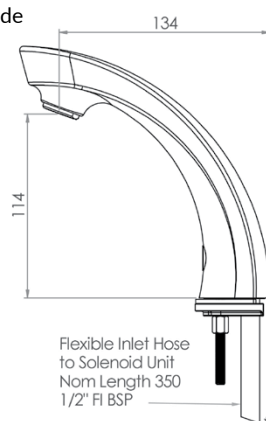

Flexible Inlet Hose to Solenoid Unit  
Nom Length 350 1/2" FI BSP



**T-3MSSP-HMST-M**



**T-3MSSP-HMST-CBS**



**T-3MSSP-HMST-BP**



**T-3MSSP-HMST-3M**

\* Power Supply with 3 metre lead available separately